


Assembly & Installation Instructions

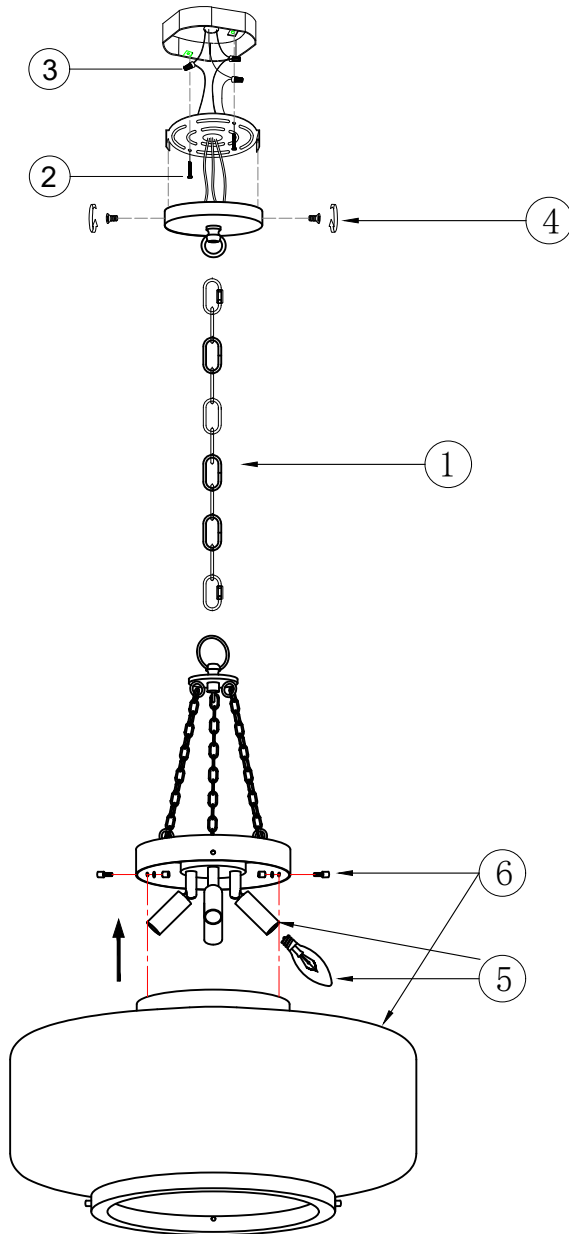

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1. Connect the light fixture to the ceiling canopy with a chain. Route the fixture wires along the chain and feed them through the ceiling canopy.
2. Secure the mounting plate to the U.S.-standard junction box using mounting plate screws.
3. Connect the wires using the wire caps as follows:
Connect the fixture's BLACK wire to the home LIVE/HOT wire.
Connect the fixture's WHITE wire to the home NEUTRAL wire.
Connect the fixture's GROUND wire to the home GROUND wire to the mounting plate with the green screw.
***Note:** Ensure no wire strands are exposed.
4. Secure the ceiling canopy to the mounting plate using fastening screws to ensure a firm installation.
5. Adjust the lamp holder to the desired position, then install the bulbs (NOT INCLUDED) onto the lamp holder.
6. Align the metal screws and rubber washers with the corresponding holes to secure the glass lampshade to the light fixture body.
Restore electrical power and check if the bulbs (NOT INCLUDED) work properly. Installation is complete.