

Project: _____

Fixture Type: _____

Location: _____

Contact: _____

LED

LED Ceiling • Damp Location



Specifications:

Description:

The features a 120V alternating current (AC) source which eliminates the need for a traditional LED driver.

Construction:

- Fabric Linen Shade with a Linen Glass diffuser
- Plated Brushed Nickel (-09), Painted Antique Bronze (-20)
- Steel construction
- LED Module is replaceable
- Flicker-free dimming to 10% brightness with most ELV type dimmers (See Dimming Notes)
- CA Title 24 Compliant
- Covers a standard 4" recessed outlet box
- Mounting strap for outlet box included

Performance:


Number of Modules	1
Input Power	17W per module
Input Voltage	120V
Input Frequency	60Hz
Lumens/LPW	1211/71 (LM-79) per module
CCT	3000K
CRI	90
Life	60,000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Min. Start Temp	-30° C
Max. Operating Temp	30° C
Warranty	
Labels	cCSAus certified for damp locations ENERGY STAR® qualified

Images:



Dimensions:

A	B
10"	3-7/16"

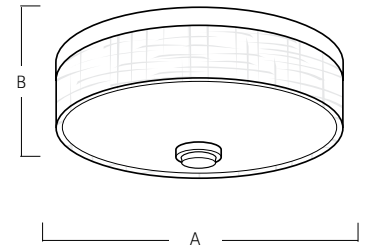

Catalog number:

Base	Finish	Color Temp	CRI
	09 - Brushed Nickel	30K - 3000K	9 - 90 CRI
	20 - Antique Bronze		



Dimming Notes:

It is designed to be compatible with many Electronic Low Voltage (ELV-Reverse Phase) controls.

The following is a partial list of known compatible dimmer controls:

Electronic Low Voltage ELV Reverse Phase Controls

Lutron	Diva Series
Lutron	Nova T Series
Lutron	Vierti Series
Lutron	
Lutron	
Leviton	
Leviton	

Digital type dimmers are not recommended.

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.