


5501.170 Shown

MODEL NUMBER:*

- 5500.170 Centerset Lavatory 1.5 gpm Pressure Compensating Aerator. Vandal-Resistant Wrist Blade handles. Less drain and pop-up hole.
- 5501.170 Centerset Lavatory 1.5 gpm Pressure Compensating Aerator. Vandal-Resistant Wrist Blade handles. Pop-up drain.
- 5502.170 Centerset Lavatory 1.5 gpm Pressure Compensating Aerator. Vandal-Resistant Wrist Blade handles. Grid strainer drain.
- 5500.140 Centerset Lavatory 1.5 gpm Pressure Compensating Aerator. Vandal-Resistant Lever handles. Less drain and pop-up hole.
- 5501.140 Centerset Lavatory
 1.5 gpm Pressure Compensating Aerator.
 Vandal-Resistant Lever handles. Pop-up drain.
- 5502.140 Centerset Lavatory 1.5 gpm Pressure Compensating Aerator. Vandal-Resistant Lever handles. Grid strainer drain.

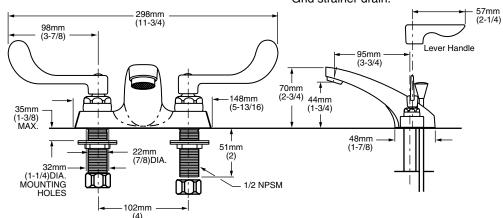

GENERAL DESCRIPTION:

Durable cast brass construction throughout. 1/2" male threaded inlet shanks with brass shank nuts and coupling nuts. 1/4 turn ceramic disc valve cartridges. Choice of Vandal-Resistant Wrist Blade or Lever handles with blue & red color indexes. All brass drain bodies with 1 1/4" (32mm) tailpieces (on applicable models). 1.5 gpm/5.7L/min. maximum flow rate. Vandal-Resistant and Laminar Flow aerators are available.

PRODUCT FEATURES:

Pressure Compensating Aerator: Provides a constant water flow of 1.5 gpm throughout the pressure range

Solid Brass Construction: Durable - Excellent in high use applications. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Low Lead: Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.

SUGGESTED SPECIFICATION:

4" centerset lavatory faucet shall be cast brass construction with all brass shank nuts and coupling nuts. Shall feature water-conserving 1.5 gpm/5.7L/min. pressure compensating aerator. Vandal-Resistant handles. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # 550. ____.002.




MONTERREY™

TWO-HANDLE CENTERSET LAVATORY FAUCET WITH CONVENTIONAL SPOUT

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1 CSA B 125 NSF 61/Section 9



		Finish
Product		Polished Chrome
Number	Description	002
5500.170	Centerset Lavatory. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Wrist Blade Handles. Less drain and pop-up hole.	
5501.170	Centerset Lavatory. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Wrist Blade Handles. Pop-up drain.	
5502.170	Centerset Lavatory. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Wrist Blade Handles. Grid strainer drain.	
5500.140	Centerset Lavatory. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Lever Handles. Less drain and pop-up hole.	
5501.140	Centerset Lavatory. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Lever Handles. Pop-up drain.	
5502.140	Centerset Lavatory. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Lever Handles. Grid strainer drain.	

Note: For Vandal-Resistant models add "VP" following the product number.

Example - 5500.170VP = Centerset Lavatory. Vandal-Resistant Wrist Blade Handles. Less drain and pop-up hole.



Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

Other Aerators Available:		
Part Suffix	Description	
V15	1.5 gpm Pressure Compensating Vandal-Resistant Aerator	
L15	1.5 gpm Pressure Compensating Laminar Flow Outlet	
LV15	1.5 gpm Pressure Compensating Vandal-Resistant Laminar Flow Outlet	
V05	0.5 gpm Pressure Compensating Vandal-Resistant Spray	