




6500.175 Shown

MODEL NUMBER:

- ❑ **6500.175 Widespread Lavatory**
0.5 gpm Pressure Compensating, Vandal-Resistant Multi-Laminar Spray. Vandal-Resistant Wrist Blade handles. LESS drain and pop-up hole.
- ❑ **6500.145 Widespread Lavatory**
0.5 gpm Pressure Compensating, Vandal-Resistant Multi-Laminar Spray. Vandal-Resistant Lever handles. LESS drain and pop-up hole.

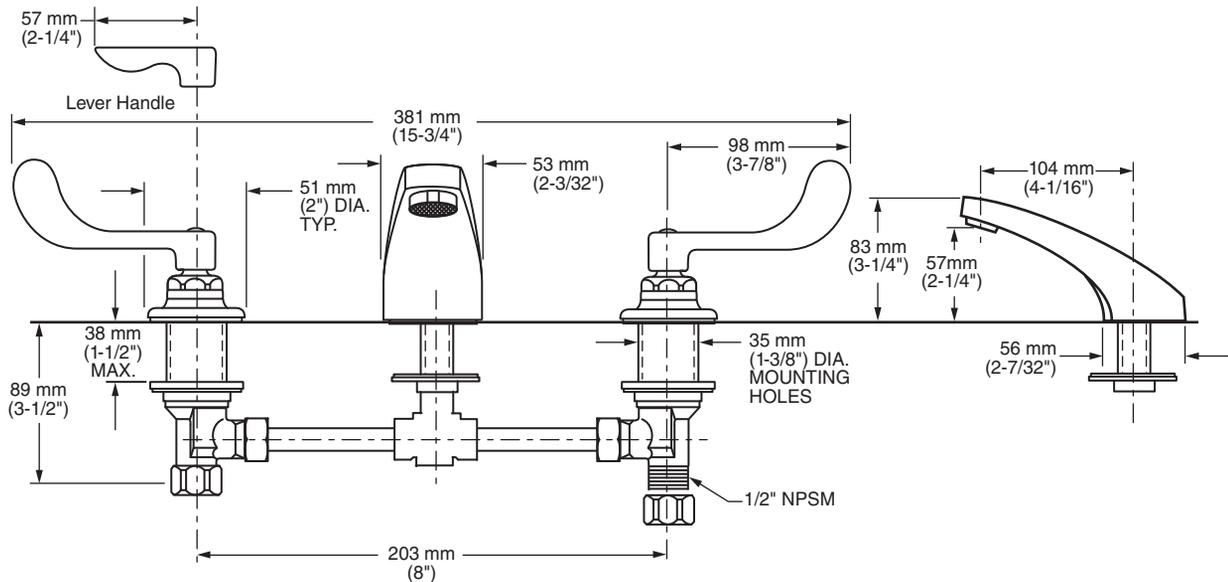

GENERAL DESCRIPTION:

Durable cast brass construction throughout. Cast brass valve bodies with 8" rigid copper connection with compression fittings. 1/2" male threaded inlet shanks with brass coupling nuts. 1/4 turn ceramic disc valve cartridges. Choice of Vandal-Resistant Wrist Blade or Lever handles with blue & red color indexes. 0.5 gpm/1.9 L/min. maximum flow rate.

PRODUCT FEATURES:

- Pressure Compensating Multi-Laminar Spray:** Provides a constant water flow of 0.5 gpm throughout the pressure range. No mix of air and water.
- Solid Brass Construction:** Durable - Excellent in high use applications. Ideal for prolonged contact with water.
- Ceramic Disc Valve Cartridge:** Assures a lifetime of drip-free performance.
- Lead Free:** Faucet contains $\leq 0.25\%$ total lead content by weighted average.

SUGGESTED SPECIFICATION

Two-handle widespread lavatory faucet shall feature cast brass valve bodies with 8" rigid copper connection. Shall feature water-conserving vandal-resistant 0.5 gpm/1.9 L/min. pressure compensating Multi-Laminar spray. Vandal-Resistant handles. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # 6500.1_5.002.




MONTERREY® 0.5 GPM
TWO-HANDLE 8" WIDESPREAD LAVATORY FAUCET
WITH CONVENTIONAL SPOUT

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ANSI 117.1**
- ASME A112.18.1**
- CSA B125.1**
- NSF 372**

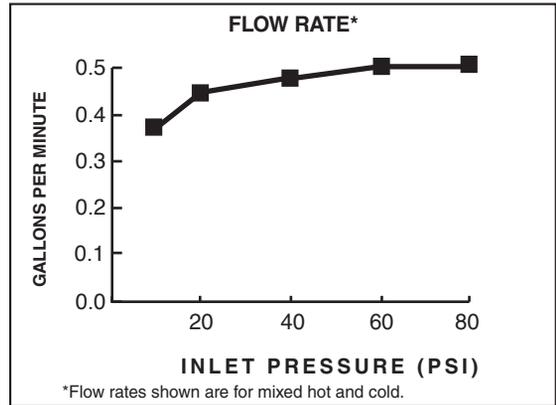

Product Number	Description	Finish
		Polished Chrome
		002
6500.175	Widespread Lavatory. 0.5 gpm/1.9 L/min pressure compensating vandal-resistant multi-laminar spray. Vandal-Resistant Wrist Blade Handles. LESS drain and pop-up hole.	
6500.145	Widespread Lavatory. 0.5 gpm/1.9 L/min pressure compensating vandal-resistant multi-laminar spray. Vandal-Resistant Lever Handles. LESS drain and pop-up hole.	

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for accessible and usable building facilities - check local codes