





①	 light fixture 1pcs	⑦	hanging tube 1pcs	⑩	chain 1pcs
②	 hanging part 1pcs	⑧	 outwardly bent metal plate 3pcs	⑪ ⑫	⑪ canopy 1pcs  ⑫ cap nut 2pcs
③ ④	screws have been installed at the ring screw 12pcs ④  ③ split metal ring 3pcs	⑨	 inwardly bent metal plate 3pcs		X 1PCS X 1PCS X 3PCS X 3PCS X 3PCS X 3PCS
⑤ ⑥	⑥ carabiner hook screw connection 6pcs ⑤ hanging tube 3pcs				

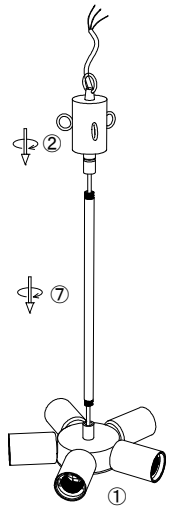


1.Let the wire of the fixture ① go through the tube ⑦ and hanging part ②, rotate to fasten all parts together.

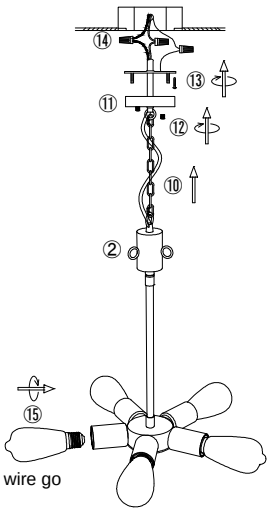


2.Hang the fixture to the canopy ⑪ with chain ⑩, let the wire go through the chain ⑩ ad canopy ⑪.
3.Install the bracket to the ceiling junction box with screw ⑬.
4.Connect the wire to your home line with cap connector ⑭.
5.Install the fixture to the bracket with cap nut ⑫.
6.Install the bulb ⑮.(bulbs are not included in the package)

Note: male A should connect with female A, male B should connect with female B (C with C, D with D).

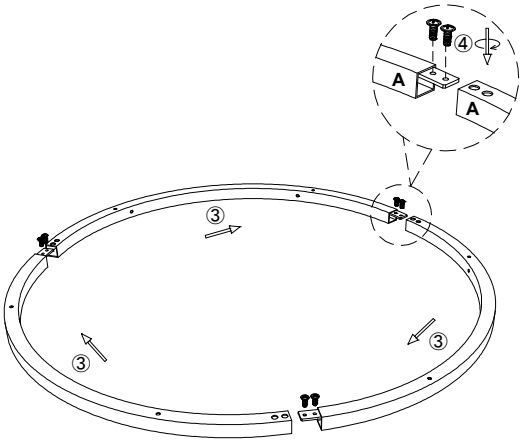


7.Combine the split ring ③ to be a complete ring and fasten it with screw ④.

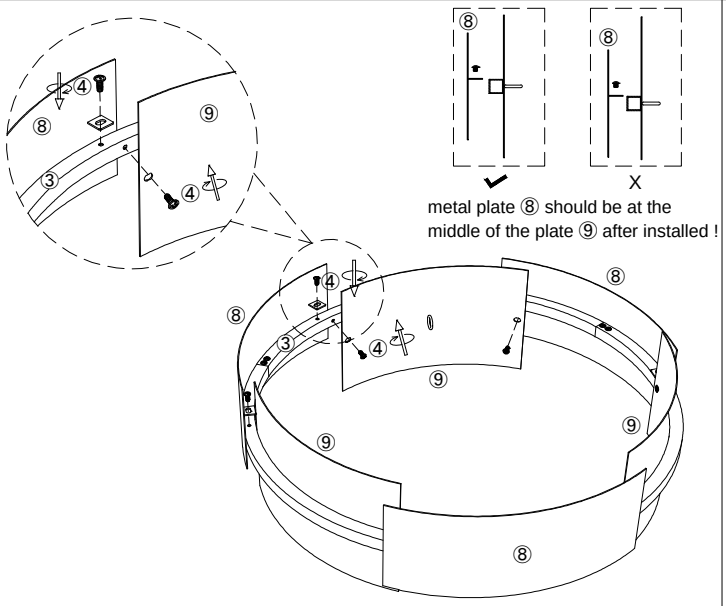

metal plate ⑧ should be at the middle of the plate ⑨ after installed !

8.Install the metal plate ⑧ and metal plate ⑨ to the ring ③ with screw ④.(don't tighten the screw ④ until all metal plate are ready installed to the ring ③, adjust the plates even and rotate to fasten the screws ④ at last)

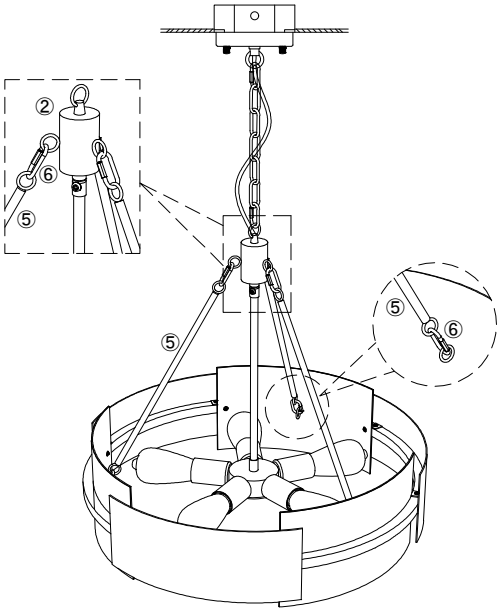

9.Hang the metal lampshade group to the fixture with hanging tube ⑤.

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation
!Only a professional electrician should install this kind of product !