


Design Poul Henningsen

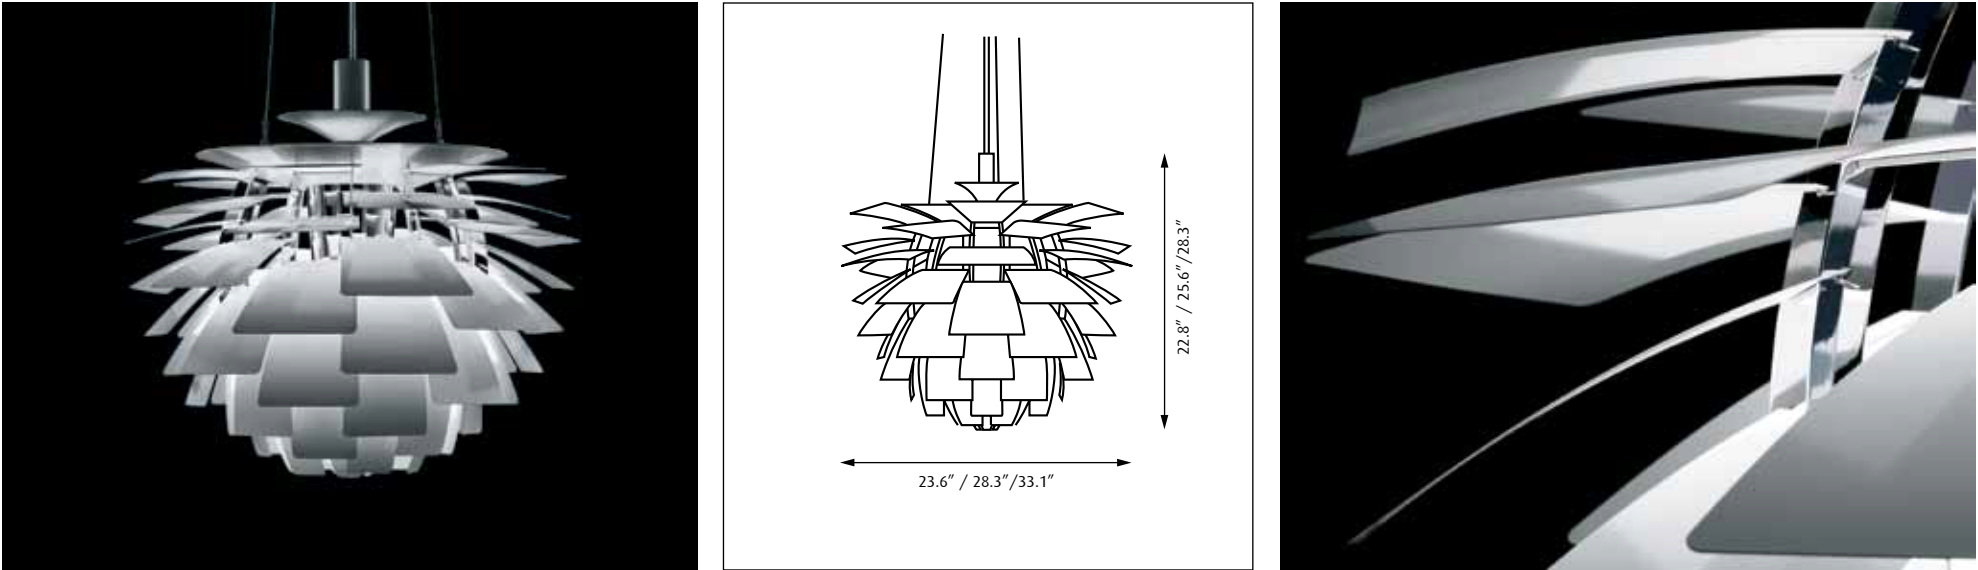

| Light source          | Voltage          | Weight - Metal Frame | Weight - Glass Frame | Electric shock protection | Ingress protection |
|-----------------------|------------------|----------------------|----------------------|---------------------------|--------------------|
| <b>23.6":<br/>LED</b> | <b>120V-277V</b> | <b>Max 41 Lbs</b>    | <b>Max 44 Lbs</b>    | <b>Cl. I</b>              | <b>IP 20</b>       |
| <b>28.3":<br/>LED</b> | <b>120V-277V</b> | <b>Max 44 Lbs</b>    | <b>Max 55 Lbs</b>    | <b>Cl. I</b>              | <b>IP 20</b>       |
| <b>33.1":<br/>LED</b> | <b>120V-277V</b> | <b>Max 61 Lbs</b>    | <b>Max 73 Lbs</b>    | <b>Cl. I</b>              | <b>IP 20</b>       |





The luminaire may only be lifted/carried by the wire and never by the cable!

Recommended cleaning substances:


Wipe off dust with a dry, soft cloth. Remove greasy spots etc. with a soft cloth dampened in lukewarm water (<122° F/ 50° C) with a mild detergent.

Warning: Scouring powder and similar substances will scratch surfaces.


All installation is subject to local code and jurisdiction. Consult a qualified electrician to ensure correct branch circuit conductor. The installer must ensure that the ceiling can support the luminaire's weight. The installer must if necessary reinforce the ceiling structure by adequate means.

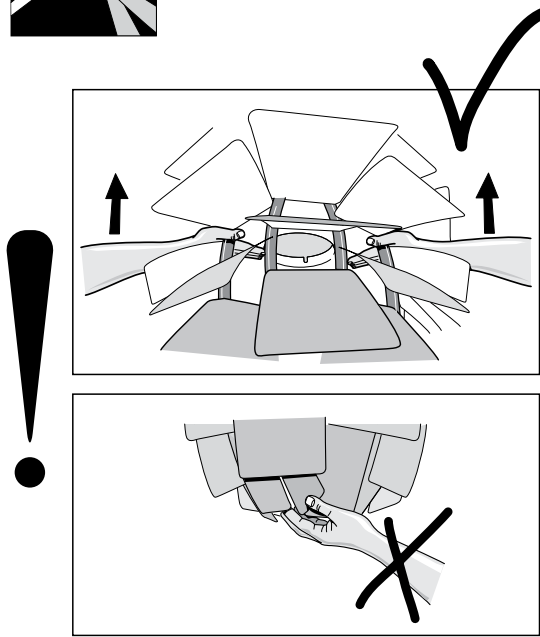

Minimum height

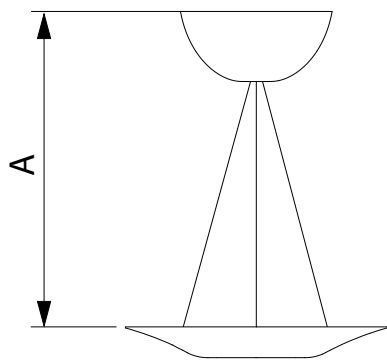



Artichoke Ø33.1" A\* = 25.6"  
Artichoke Ø28.3" A\* = 28.3"

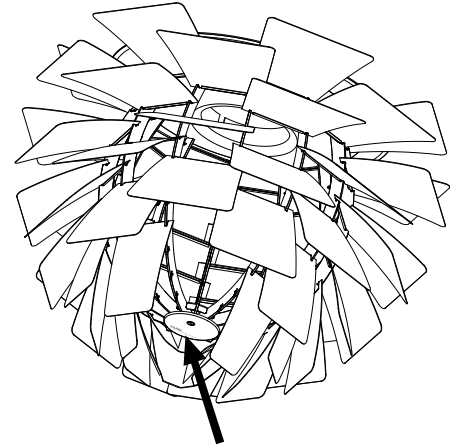

ID NUMBER: \_\_\_\_\_

Please register ID number at  
[www.louisepoulsen.com](http://www.louisepoulsen.com)

- Green (Ground) For dimming wires use class 1 wiring methods:
- White (Neutral) Grey (0-10V Dim -)
- Black (Line) Violet (0-10V Dim +)

**FOR DIMMING:**

Remove & discard  
resistor from connector

**FOR NON-DIMMING:**

Keep resistor in connector.  
Cap off grey + violet wires.

