

Saile® Dual Flush Compact Toilet K-14338-SMC

Features

- Decorated with a Chinese-inspired metallic floral pattern on White background.
- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design.
- Compact elongated bowl offers added comfort while occupying the same space as a round bowl.
- Two-button flush offers a choice of 1.6 or 0.8 gallons per flush (qpf).
- Skirted trapway simplifies cleaning.
- Quiet-Close™ prevents slamming by slowly bringing the toilet seat and lid to a gentle close.
- Coordinates with other products with the Empress Bouquet design.

Technology

 Dual-flush technology allows you to choose between a full- or half-flush.

Installation

Standard 12-inch rough-in.

Water Conservation & Rebates

- WaterSense® toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.
- This product can help a building earn Water Efficiency points in the LEED® Green Building Rating System.

Recommended Accessories

K-7637 Angle Supply with Stop (single) K-9384 Dual-flush Actuator

Components

Additional included component/s: Seat, Tank Cover, and Dual Flush Push Button.



Codes/Standards

ASME A112.19.2/CSA B45.1 ASME A112.19.14 DOE - Energy Policy Act 1992

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description

0 White





Saile®


23-3/4"


6-7/8"

(175 mm)

(603 mm)

Dual Flush Compact Toilet K-14338-SMC



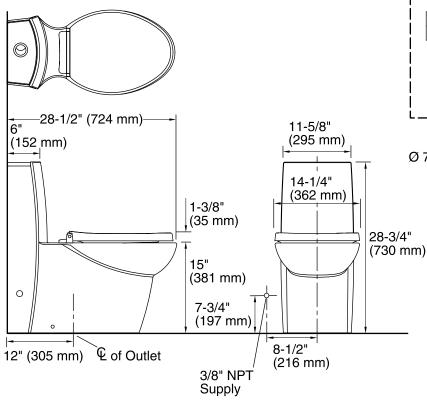

Technical Information

All product dimensions are nominal.

Toilet type:

One-piece

Bowl shape:

Elongated front

Seat hinge type: Quiet-Close[™], Quick-Release[™]

Trap passageway: 2-1/8" (54 mm)

Water surface size: 4-1/8" x 5-1/8" (105 mm x 130 mm)

Rough-in: 12" (305 mm) Seat-mounting holes: 5-1/2" (140 mm)

Notes

11-3/4"

12" (305 mm)

Min Required

Mounting

Ø 3/8" (197 mm)

Holes

(298 mm)

For back-to-back toilet installations: Use only a 45° double wye fitting.

(102 mm)

11-1/2"

(292 mm)

Install this product according to the installation guide.