



SCHOOLHOUSE WALL SCONCE ASSEMBLY INSTRUCTION

For Model I002W1

Thanks for purchasing our Light fixture. Please retain the package and its inner protective materials for one month or longer. Read user manual before installation and keep it for future reference. If you have any questions, contact us at hrgcustomerservice@163.com.

WARRANTY

These instructions are suggested installation procedures only. Please be reminded that HRG assumes no liabilities occurred from improper installation. All of our products are warranted against defects in materials and workmanship for a period of one year from the date of purchasing. We provide 1 month hassle-free full refund, 6 month money back or free replacement and 12 month limited warranty.

WARNING

(To reduce the risk of fire, electric shock, or injury to persons)

- We suggest installation by a licensed electrician.
- Before you start, NEVER attempt any work without shutting off the electricity until the work is done.
- Mounting surface should be clean, dry, flat, strong enough and 1/4" larger than the canopy on all side. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
- Make sure that the ceiling or wall can stand the weight of the lamp before assembling.
- Keep the lamp away from acidic and basic objects in case of damaging the surface of the lamp.
- Shut off electricity before replacing bulb.
- Do not touch the bulb or lamp shade when the lighting fixture is working.
- The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

CLEANING

- To clean, wipe fixture with a soft cloth.
- Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

SPECIFICATION

VOLTAGE	120V
WATTAGE	Max.60W
POWER SOURCE	Hardwired


BULB BASE	E26 Medium
NUMBER OF LIGHTS	1

ACCESSORIES INCLUDED


Wire Connectors*3pcs



Mounting Screw*2pcs



Carefully remove the fixture from the carton and check that all parts are included as shown in figure. Be careful not to misplace any of the screws or parts, which are needed to install this fixture.

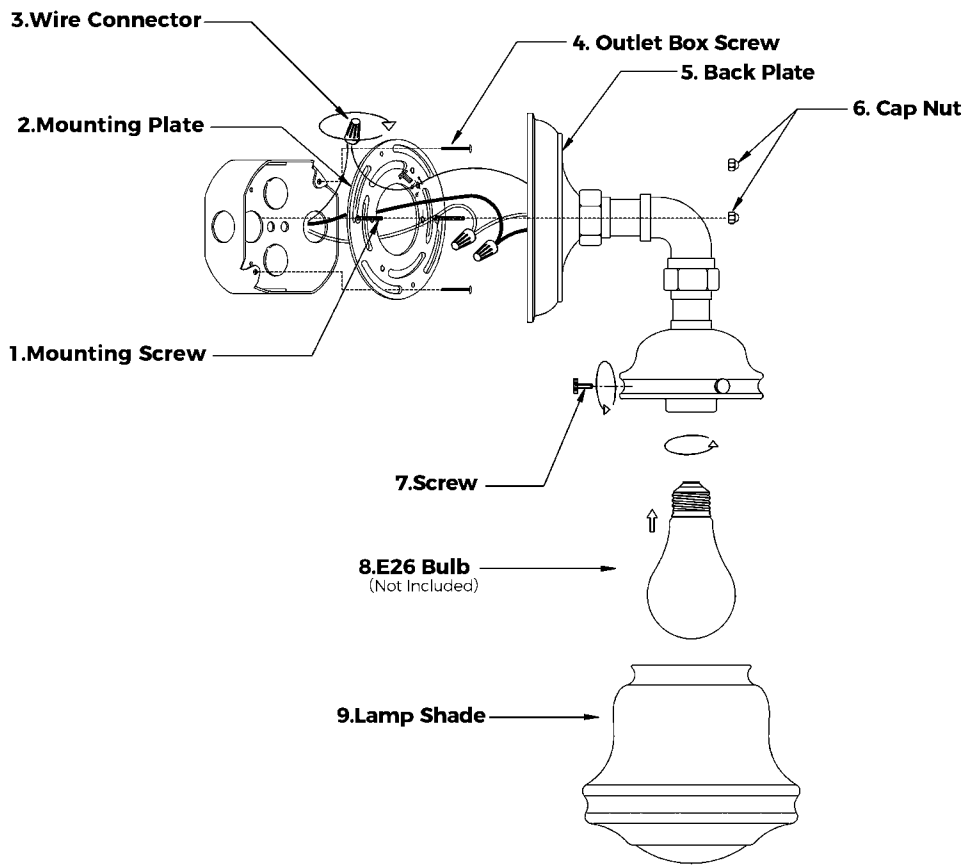

Mounting and Wiring Instructions

- Turn off power at circuit box to avoid electric shock.
- Thread 'mounting screws 1' into the matching holes of 'mounting plate 2'. Secure 'mounting plate 2' to outlet box with 'outlet box screws 4'.
- Connect the black wire from the fixture with the black wire (live wire) from the outlet box by using 'wire connectors 3'.
- Connect the white wire from the fixture with the white wire (neutral wire) from the outlet box by using 'wire connectors 3'.
- Partially unscrew the grounding screw on mounting plate.
- Wrap ground wire from fixture around grounding screw, leaving enough excess wire. Connect the excess ground wire from the fixture with the ground wire from outlet box by using 'wire connectors 3'.
- Tighten grounding screw. Do not over tighten.
- Tuck wires inside outlet box.

Fixture Assembly Instructions

- Position 'back plate 5' by aligning back plate opening to 'mounting screws 1'. Secure 'back plate 5' with 'cap nuts 6'.
- Screw and install 'E26 bulb 8'. (Please do not exceed the maximum capacity recommended on the socket. Bulb not included)
- Fix 'lamp shade 9' with 'screws 7'.
- Check everything installed correctly, then you can turn on the light.