





US 144



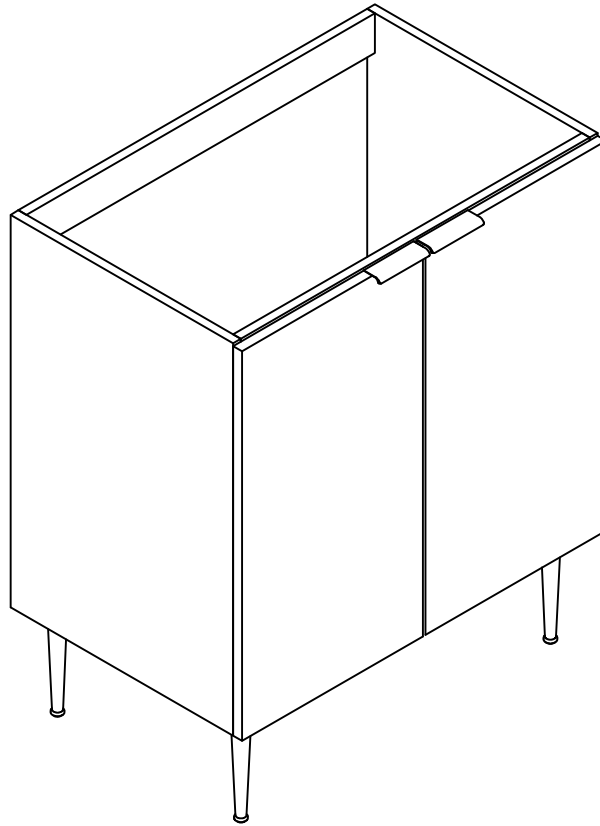










For the convenience and neatness of reading the manual, the door panel here is displayed using a simple drawing method.



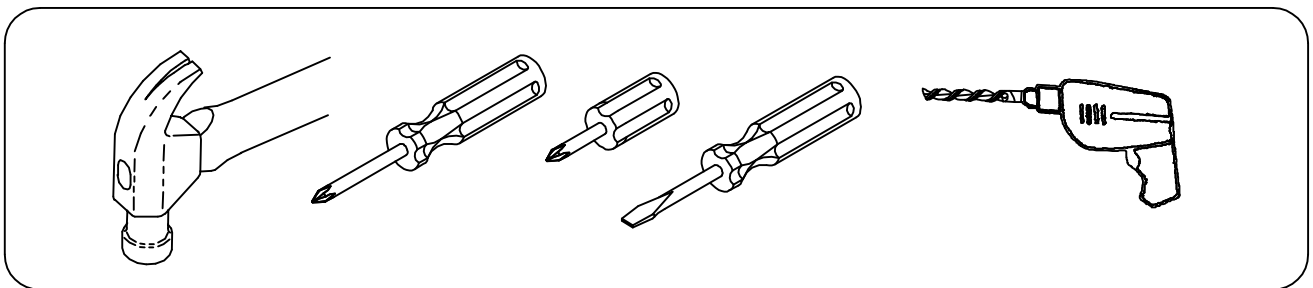



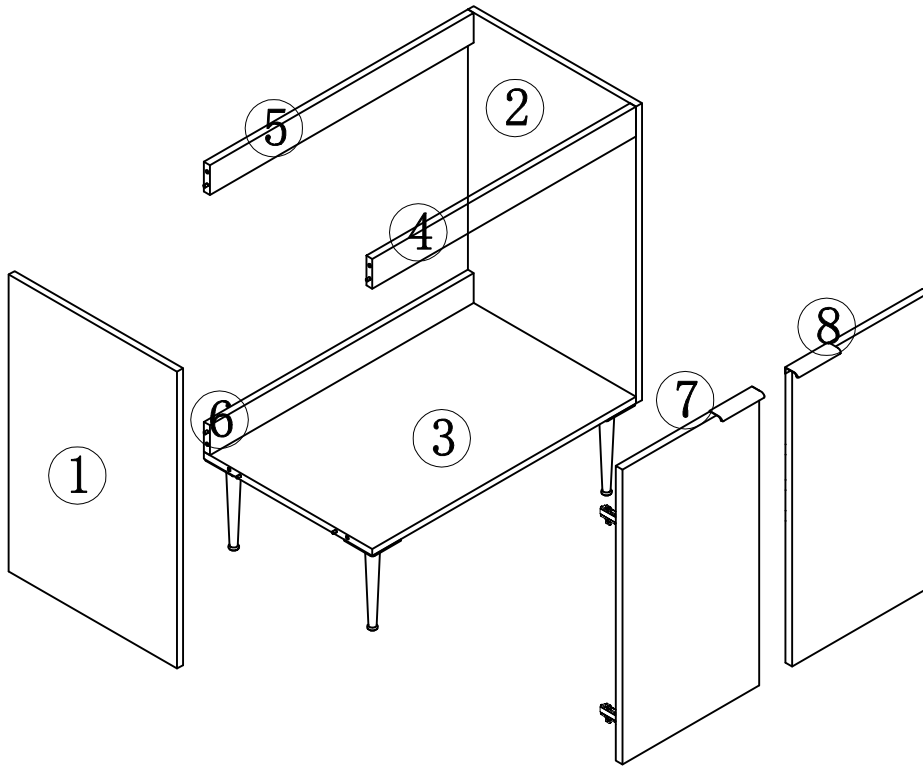


YOU MAY NEED (NOT SUPPLY)





ASSEMBLY DIAGRAM





PARTS LIST					
PARTS LIST					
NO	DESCRIPTION	QTY	NO	DESCRIPTION	QTY
①	Left side panel 	1	⑤	Back fixed panel 	1
②	Right side panel 	1	⑥	Back fixed panel 	1
③	Bottom panel 	1	⑦	Left door panel 	1
④	Front fixed panel 	1	⑧	Right door panel 	1

PARTS LIST					
HARDWARE LIST					
NO	DESCRIPTION	QTY	NO	DESCRIPTION	QTY
A	Three-in-one eccentric wheel 	10	F	4*12mm screw 	4
B	Three-in-one connecting rod 	10	G	Door handle 	2
C	Three-in-one sticker 	10	H	Metal feet 	4
D	8*40mm wood dowel pins 	10	I	Door hinges 	4
E	4*16mm screw 	40			
CAUTION: Please confirm the parts list before installation					


STEP 1

HARDWARE LIST	
Three-in-one connecting rod B  10PCS	


1. Put the three-in-one connecting rod in the 10mm hole of the following panels and tighten them with a cross screwdriver or an electric tool.

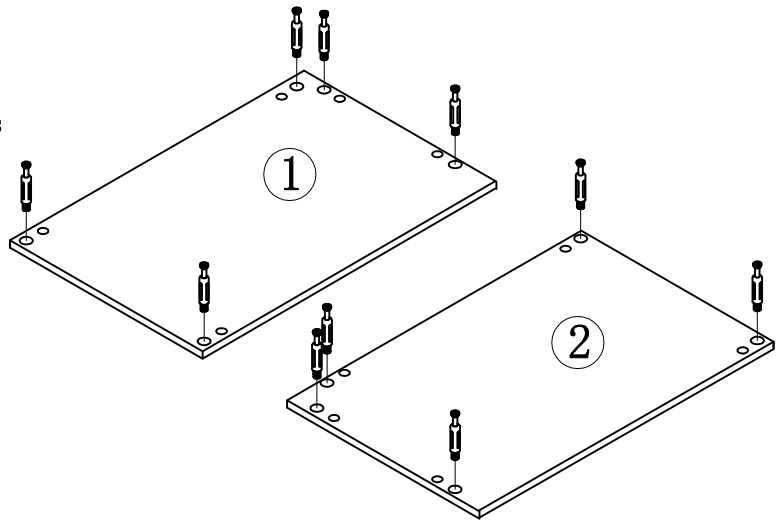



STEP 2


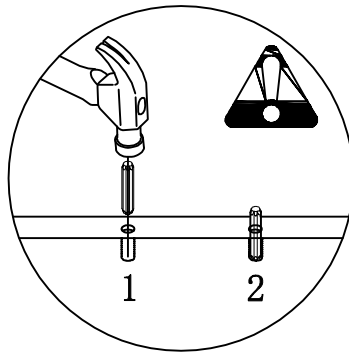


1. Strike the 08*40mm wood dowel pin into the 8mm hole of the above panels with an iron hammer. Please note that the hole of the three-in-one connecting rod should also be 8mm. The hole of the three-in-one connecting rod connects to the hole of 15mm three-in-one eccentric wheel.

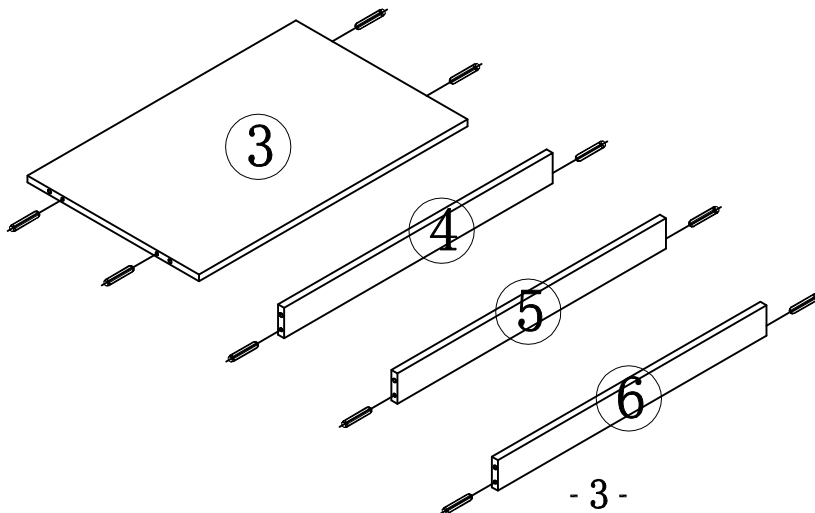


HARDWARE LIST	
8*40mm wood dowel pins D  10PCS	

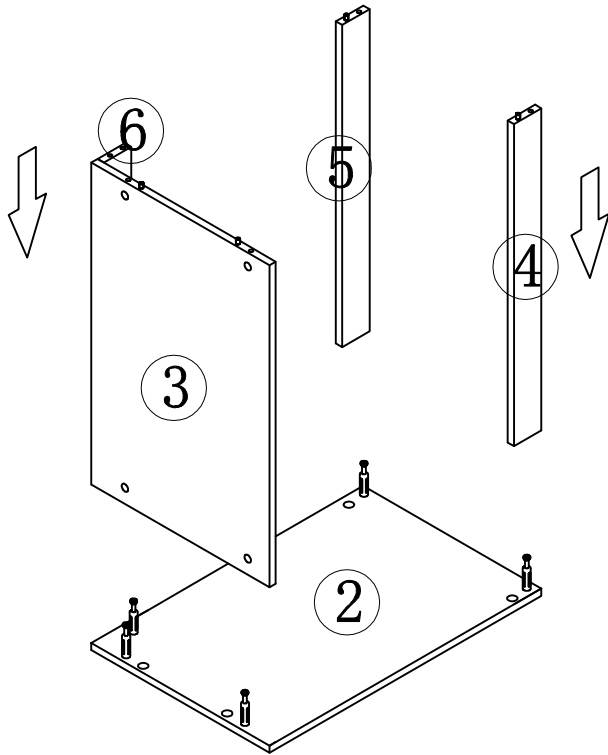


STEP 3





1. Connect No. 3-4-5-6 panel to No. 2 panel tightly with the three-in-one eccentric wheel.




2. Cover the mounting hole of the eccentric wheel with a three-in-one sticker.

HARDWARE LIST		
Three-in-one eccentric wheel A  5PCS	Three-in-one sticker C  5PCS	




STEP 4

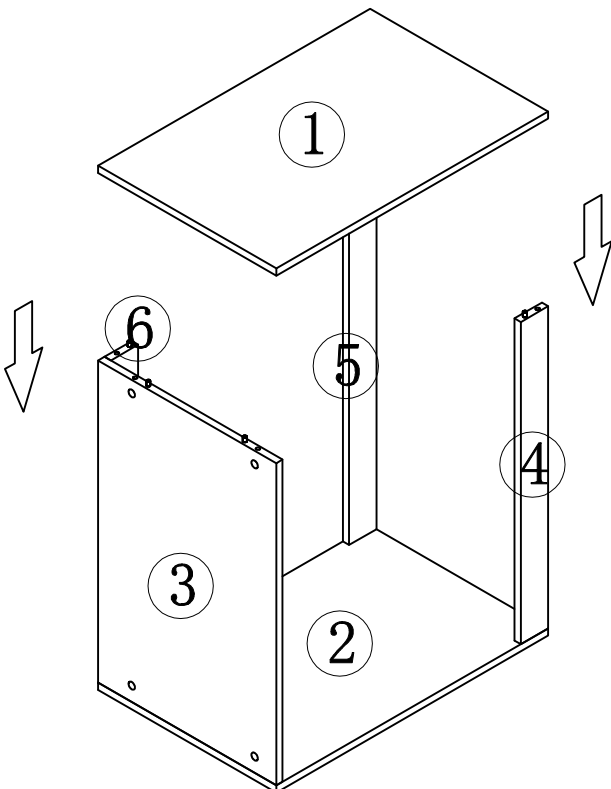


1. Connect No. 1 panel to No. 3-4-5-6 panel tightly with the three-in-one eccentric wheel.




2. Cover the mounting hole of the eccentric wheel with a three-in-one sticker.




HARDWARE LIST		
Three-in-one eccentric wheel A  5PCS	Three-in-one sticker C  5PCS	

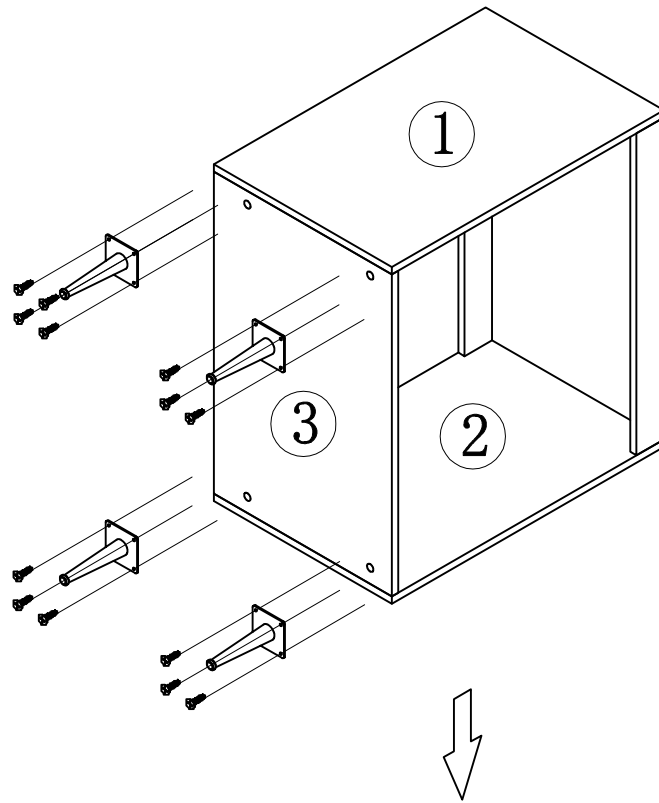STEP 5

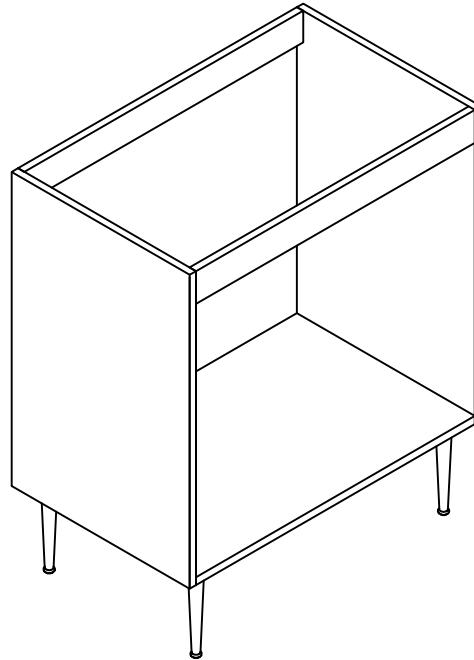


Use 4*16 screws to fix the Metal feet




HARDWARE LIST		
4*16mm screw	Metal feet	
E  16PCS	H  4PCS	


STEP 6

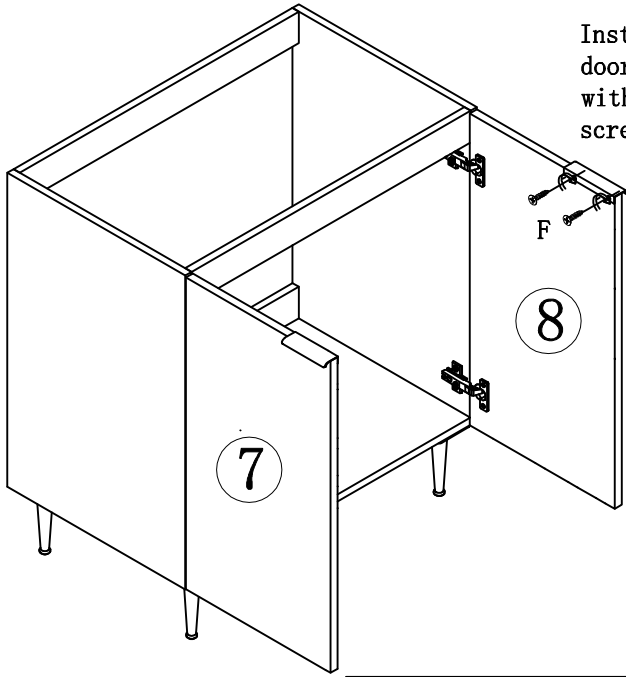


Install the door handle with 4*12mm screws.





1. Install the hinge cup to the door panel with 4*16mm screws.



2. Install the hinge to the side panel with 4*16mm screws.



4. Adjust the door panel clearance.




3. Install the hinge cup on the door panel to the hinge of the side panel.

HARDWARE LIST				
4*16mm screw	Door hinges	Door handle	4*12mm screw	
E  24PCS	I  4PCS	G  2PCS	F  4PCS	


Hinge/Door Adjustment and Realignment

If adjustment or realignment is needed, follow the instructions provided in the following chart.


Vertical adjustment




1. Loosen screws







2. Adjust hinge







3. Tighten screws



Horizontal adjustment



Door gap adjustment





Choking hazard-Small Parts : This unit contains small parts, not for children under 3 years.

Tip-over hazard : Secure finished unit to wall stud using L-Bracket and wall screw (#10*1.5"W/out provided). If a wall stud is not neccessible , Consault your local hardware store for appropriate mounting hardware . Failure to properly install will result in product collapse or tip-over. Serious injury can occur .