



# Specifications

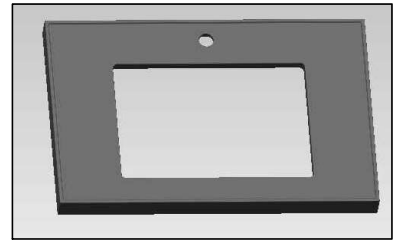

specifications:

1. Visible surface must be smooth and smooth, natural transition.
2. Against the wall must be vertical, the other several faces also try to vertical.
3. Make sure there is no water in the basin.
4. Can Not have acute angle, visible surface of the corner is R=2.
5. Positive and negative tolerance: 2mm

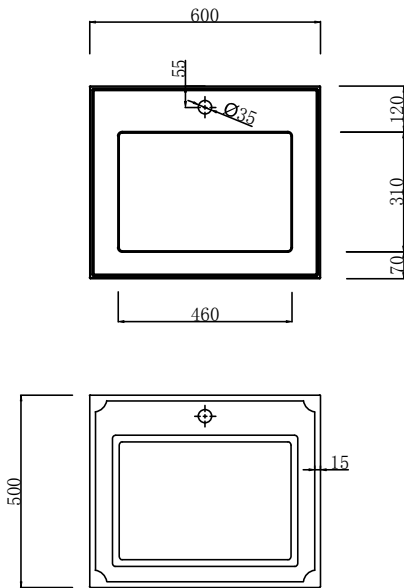








				Resine Basine		
				Size: 600*500*50mm		
Mark	Initial release	Signature date		Qty	Unit	Proportion
Design	Change content			1	PCS	1
Revise	Check			Total	1 PCS	No. 1 PCS
Technology	Approve					

PHA  
HAT  
DIM  
HID.5  
HID  
CEN.5  
CEN  
DRW2  
DRW



A4

**BASIN DIMENSIONS (inch)**

Sink Size	Length (from left to right)	Width (from front to back)	Depth (from top to bottom)	Distance between the side of the faucet hole and the back edge of the basin	Distance between the center of the faucet hole and the back edge of the top	Distance between the center of the drain hole and the back edge of the top	Distance between the center of the faucet/drain hole and closer side edge of the top	Distance between two faucet/drain holes (center to center)	Distance between the two basins
									
24" SINK	18	12	4	1.75	2.35	10.5	12	/	/
30" SINK	18	12	4	1.75	2.35	10.5	15	/	/
36" SINK	18	12	4	1.75	2.35	10.5	17.75	/	/
42" SINK	20	12	4	1.75	2.35	10.5	21	/	/
48" SINK	20	12	4	1.75	2.35	10.5	23.5	/	/
60" S SINK	24	13	5	1.75	2.5	9.25	29.5	/	/
60" SL SINK	20	12	4	1.75	2.35	10.5	14.75	/	/
60" SR SINK	20	12	4	1.75	2.35	10.5	14.75	/	/
60" D SINK	18	12	4	1.75	2.35	10.5	14.75	29.5	11.5
72" D SINK	20	12	4	1.75	2.35	10.5	17.75	35.5	15.75
84" D SINK	20	12	4	1.75	2.35	10.5	21	41.75	22

Faucet Hole:  $\phi$  1.2

Drain Hole:  $\phi$  1.75