

GREYFIELD

FREESTANDING TUB FILLER

SKU: 948657



FEATURES

- Spout max. flow rate: 8 gpm (30 L/min) @ 60 psi.
- Hand shower max. flow rate: 1.8 gpm (6.8 L/min) @ 80 psi.
- Three function hand shower (full spray, massage, spray + massage).
- Integral diverter to hand shower.
- Handshower includes factory installed backflow prevention check valve.
- Optional rough-in valve includes stops.
- Underfloor access is required for proper installation.
- Installation on an existing concrete slab will require cutting and concrete removal.

SIGNATURE HARDWARE Lifetime Warranty

See website for detailed warranty information.

CONTENTS


TUB FILLER	PAGE 2
VALVE	PAGE 3

REVISED 02/14/2020

GREYFIELD

FREESTANDING TUB FILLER

SKU: 948657

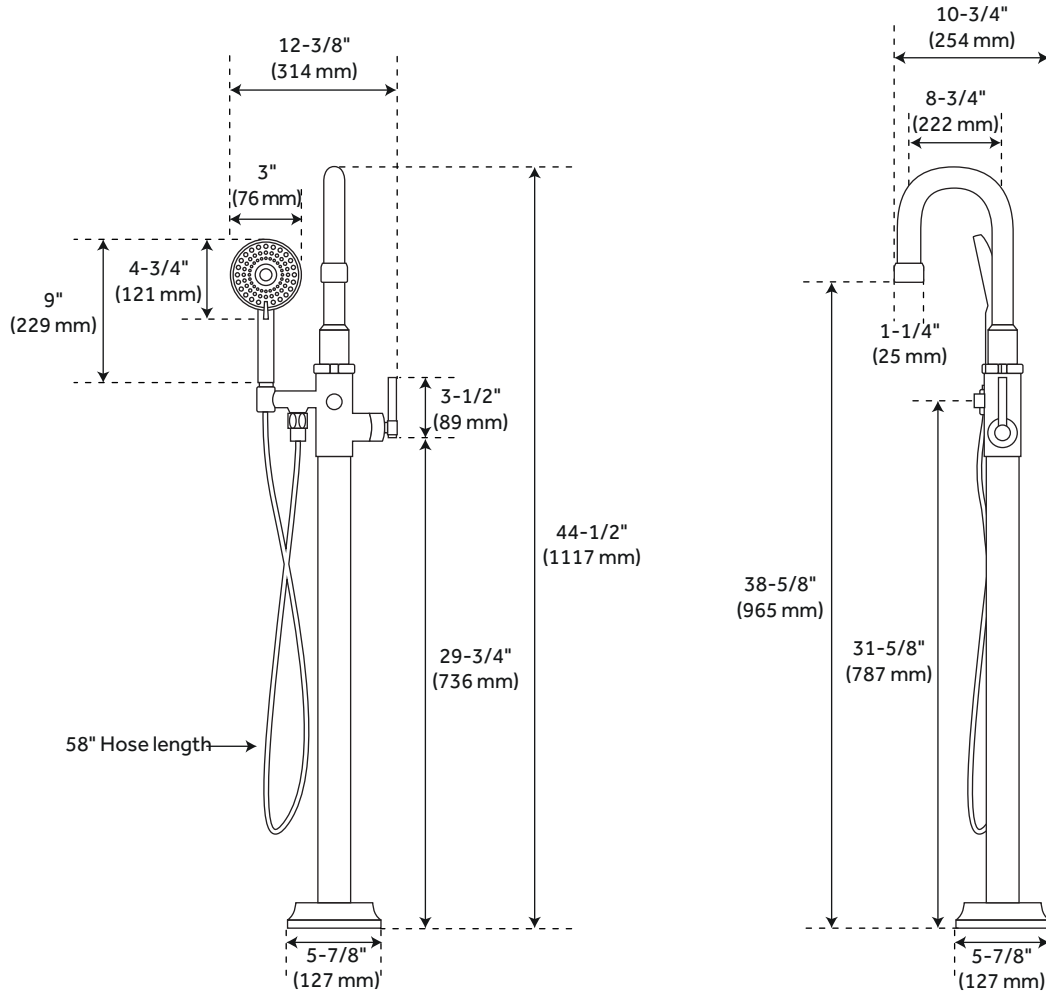

FEATURES

Installation Type: Freestanding
 Handle Type: Lever
 Tub Faucet Material: Brass
 Length: 10-3/4"
 Width: 12-3/8"
 Height: 44-1/2"
 Height To Spout: 38-5/8"
 Height to Control Valve: 31-5/8"
 Spout Reach: 8-3/4"
 Spout Width: 1-1/4"
 Hot and Cold Indicators: No
 Drain Included: No
 Base Plate Diameter: 5-7/8"
 Ceramic Disc Cartridges: Yes
 Hand Shower Hose Length: 58"
 Hand Shower Material: Zinc

CODES/STANDARDS

cUPC
 ASME A112.18.1/CSA B125.1
 ASME A112.18.3
 ICC/ANSI A117.1 (when installed according to
 ADA Standards)
 WaterSense
 CEC Listed
 Massachusetts Accepted



SIGNATURE HARDWARE LIFETIME WARRANTY

See website for warranty information




All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

PAGE 2
 Code: SHGFFS2000GBN/SHGFFS2000GCP
 SHGFFS2000GPN

FREESTANDING

TUB FAUCET ROUGH-IN VALVE

SKU: 448006

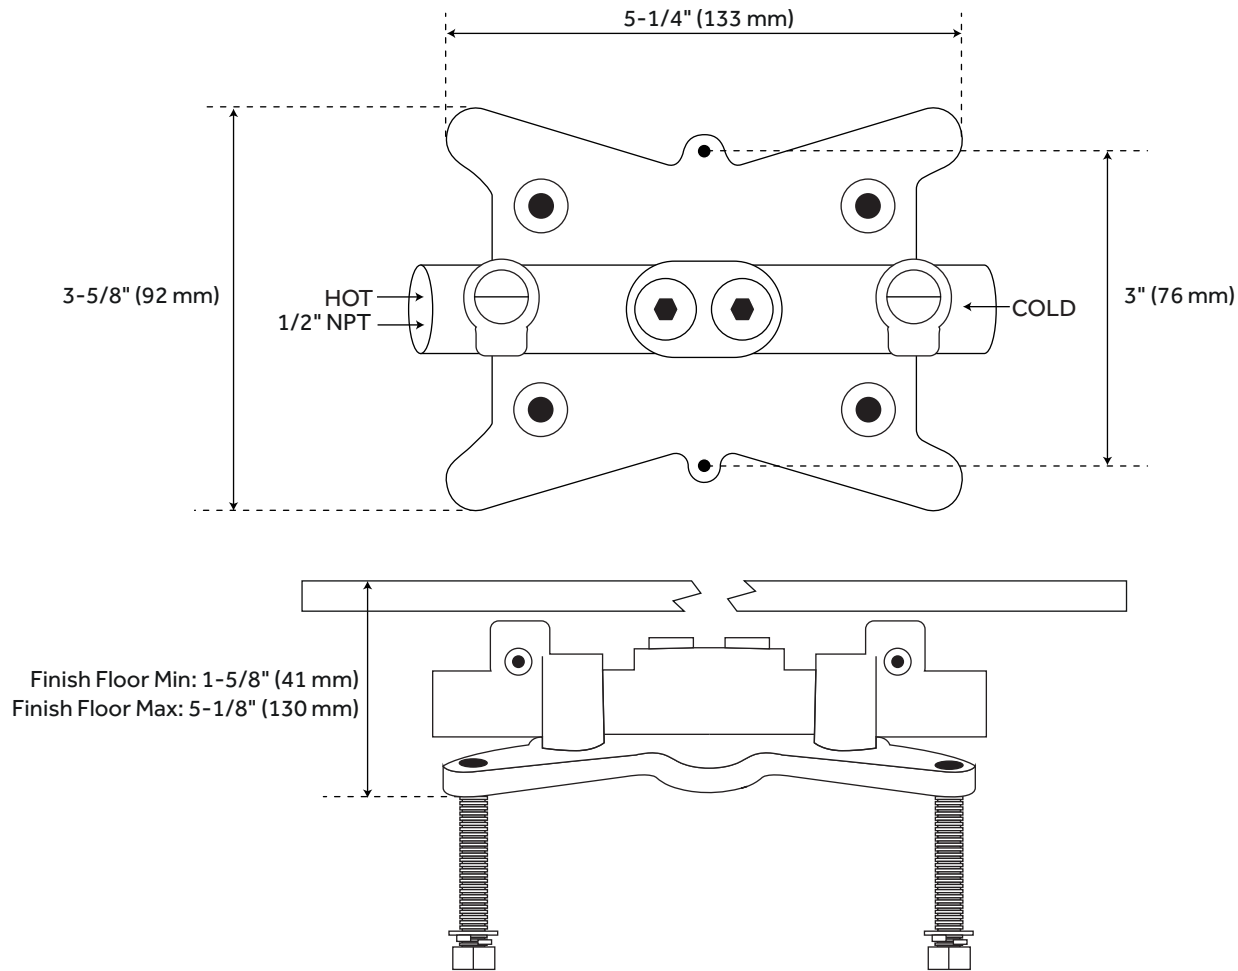

FEATURES

Material: Brass
Length: 5-1/4"
Width: 3-5/8"
Height: 5-1/8"
NPT Connection: 1/2"

CODES/STANDARDS

cUPC
ASME A112.18.1/CSA B125.1
Massachusetts Accepted

SIGNATURE HARDWARE LIFETIME WARRANTY

See website for warranty information



All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

PAGE 3
CODE: SHFSR2000WS