
Waterfall Kitchen Sink Set















User Manual

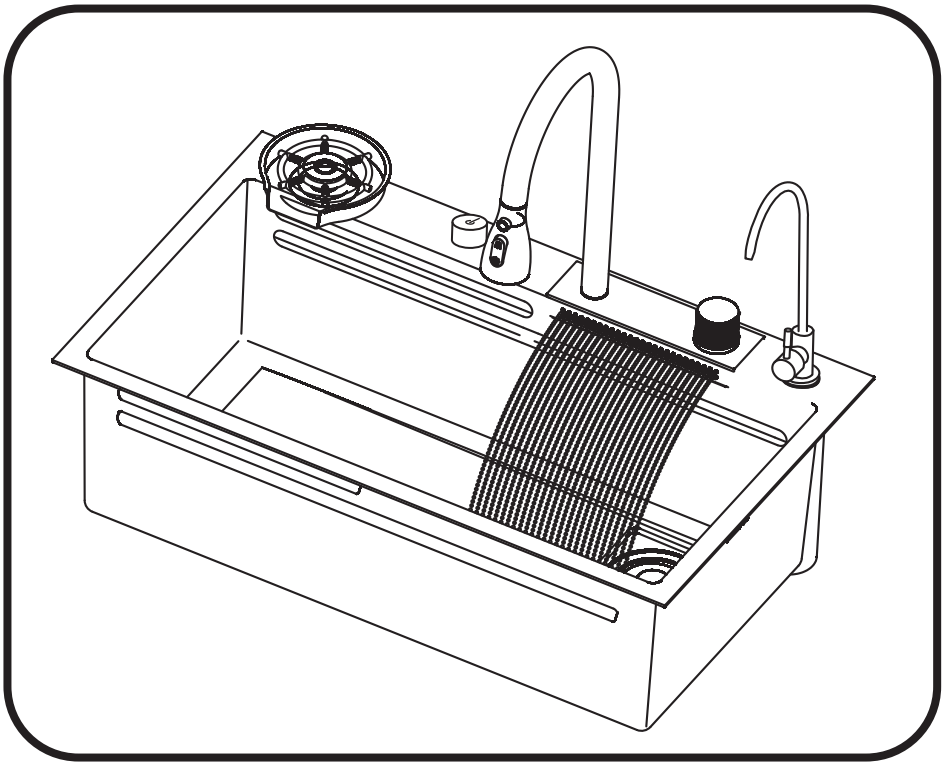

Precautions

(1) Consult a professional plumber or installer experienced in handling waterfall kitchen sinks to minimize the risk of leaks or damage if unsure about the installation details.
(2) Ensure that the kitchen cabinet and countertop can support the sink's weight before installing the waterfall kitchen sink.
(3) Avoid applying excessive force or pressure on the faucet handle, sprayer, or any other components for the longevity of the sink.
(4) Regularly clean the waterfall kitchen sink using mild soap or a non-abrasive cleaner, and rinse thoroughly after cleaning.
(5) Regularly clean the sink strainer to ensure proper water flow.
(6) Do not expose the waterfall kitchen sink to extreme temperatures.
(7) Avoid placing hot pots, pans, or dishes directly on the sink's surface, which can cause damage.
(8) Periodically inspect the waterfall kitchen sink for any signs of leaks, loose parts, or damage. If any issues are detected, contact a professional plumber for repairs.

Parts List

				
① Sink	② Pull-Out Faucet & Water Console Unit & Fasteners	③ Glass Rinser & Water Inlet Hose & Fasteners	④ Purification Faucet & Fasteners	⑤ Strainer Console
				
⑥ Sink Strainer	⑦ Sink Drain Coupling & Garbage Disposer	⑧ Overflow Hose & Washer	⑨ Drain Hose & Connector	⑩ Angle Valves
				
⑪ Counterweight Box	⑫ Chopping Board	⑬ Basin	⑭ Drainage Basket	⑮ Water Supply Hoses


Please ensure all parts and accessories are included before installation. If not, please contact us via email at support@renguehome.com.

Installation Instructions


NOTE:
● Manufacturer's instructions for the waterfall kitchen sink installation are general and may not cover all scenarios.
● Consult a professional plumber or experienced installer to minimize the risk of leaks or damage if unsure about the installation details.
● Please be cautious to avoid injury during the installation.
● It is recommended to turn off the water supply system in the house before the installation.

Installation Methods

(1)Installing the waterfall kitchen sink on top of a countertop:
Ensure enough space to install and connect the faucet unit and additional accessories.

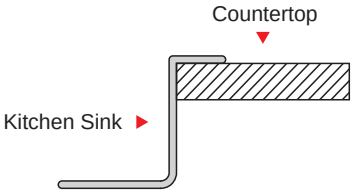

(2)Installing the waterfall kitchen sink flush with a countertop:
● The countertop material must resist moisture inside and out, as part of it will be removed to install the sink properly.
● Preparatory work at the installation site of the sink is required.
● It will be necessary to additionally use waterproofing agents, such as sealant and a waterproofing layer.
● Mounting hardware and materials for this sink installation method are not included and must be purchased separately.

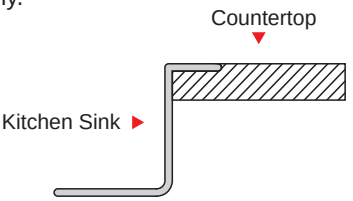


Installation Steps

NOTE: The following installation steps assume the waterfall kitchen sink will be mounted on top of a countertop.


Step 1: Prepare the countertop for installing the kitchen sink.
● Mark the hole size needed on the countertop (smaller than the external dimensions of the sink).
● Cut the hole out with tools like a jigsaw.
● Gently lower down the sink into the hole cut.

External Sink Dimensions:
80cm x 45cm x 22cm

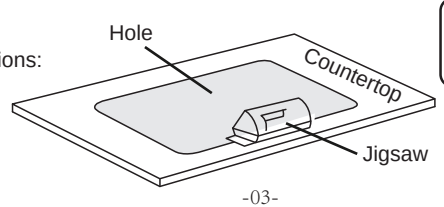


It is recommended to secure the sink onto the countertop further with sealant.

Step 2: Connect 3 water supply hoses (⑮) to the bottom of the water console (②).

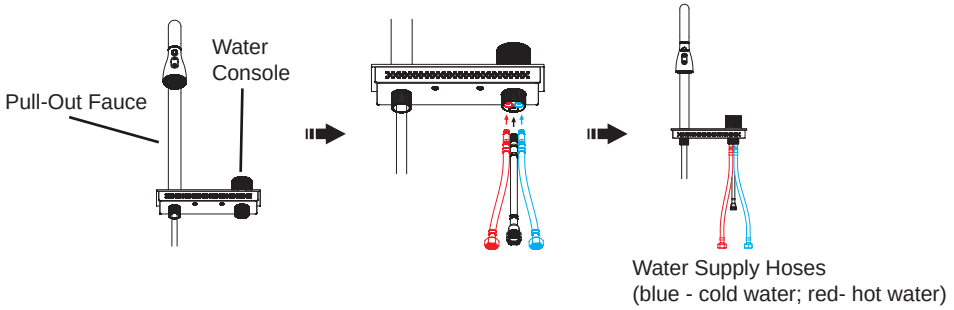


Step 3: Attach the pull-out faucet and water console unit to the sink.

- Pass the 3 water supply hoses (⑮) through the hole in the sink.
- Place the pull-out faucet and water console unit (②) into the groove on the sink edge.

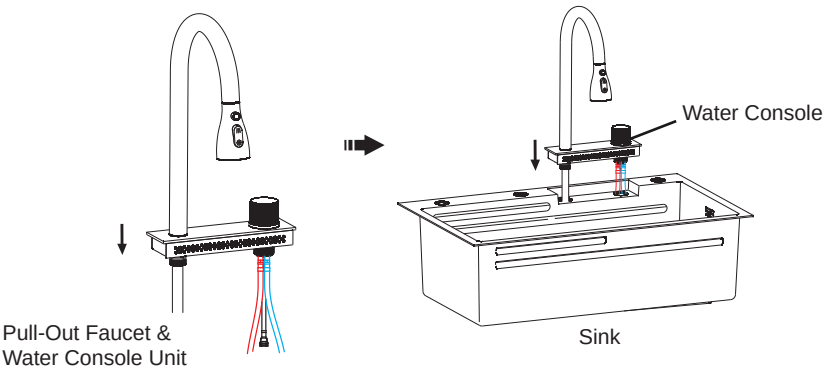


Step 4: Secure the pull-out faucet and water console unit.

- Pass 3 water supply hoses (⑮) through a black rubber washer, a metal washer, and a brass c-shaped lock nut (②).
- Pass the black pull-out spray hose at the bottom of the pull-out faucet through a black rubber washer and a brass lock nut (②).
- Tighten and secure the 2 brass lock nuts to the bottom of the faucet and the water console.

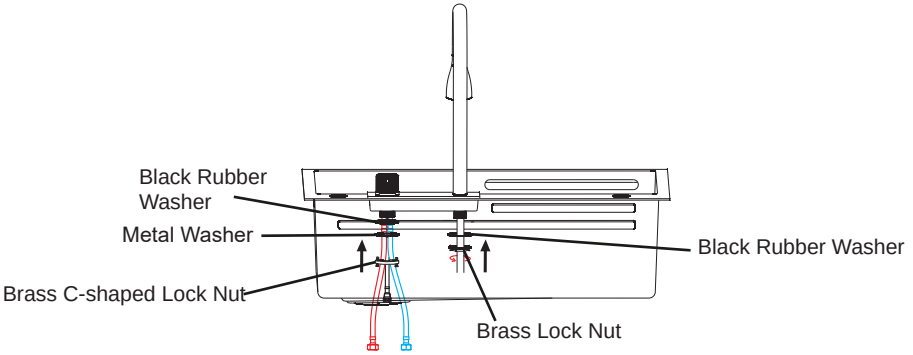


Step 5: Connect the pull-out spray hose to the short water supply hose (⑮).

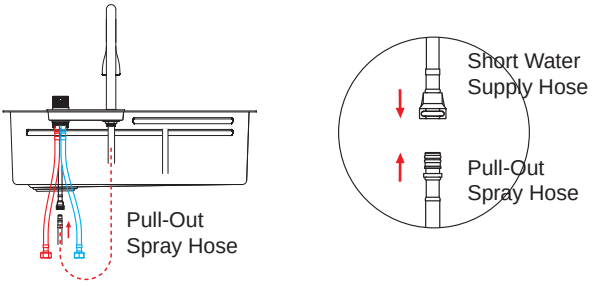


Step 6: Attach a counterweight box to the pull-out spray hose.

- Loosen the screws in the counterweight box (⑪) with a screwdriver.
- Put the pull-out spray hose into the counterweight box.
- Close the counterweight box and tighten the screws with the screwdriver.

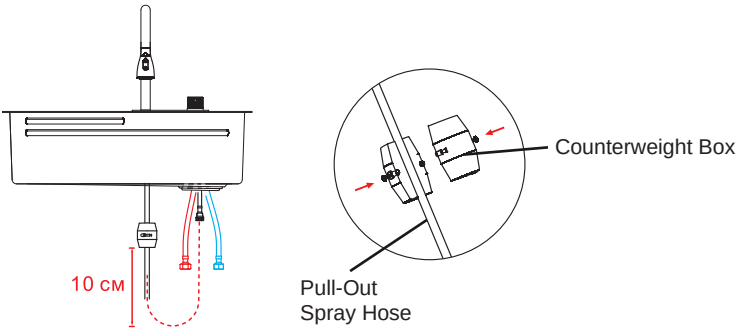


Step 7: Install the glass rinser.


- Attach a small transparent washer (③) to the bottom end of the glass rinser (③) and place the bottom end into the hole.
- Attach and secure a white nut (③) to the glass rinser bottom end from the sink bottom.
- Attach and tighten the water inlet hose (③) to the glass rinser bottom.

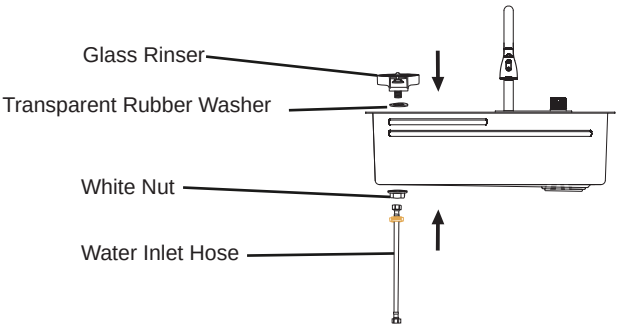


Step 8: Install the purification faucet.
● Place a thick black rubber washer (④) around the hole in the sink.
● Insert the purification faucet (④) through the washer and the hole.
● Attach another black rubber washer (④) through the purification bottom end from the sink bottom.
● Attach and tighten a white nut (④) to the purification faucet bottom from the sink bottom.
● Attach and tighten a white hose connector (④) to the purification faucet bottom from the sink bottom.

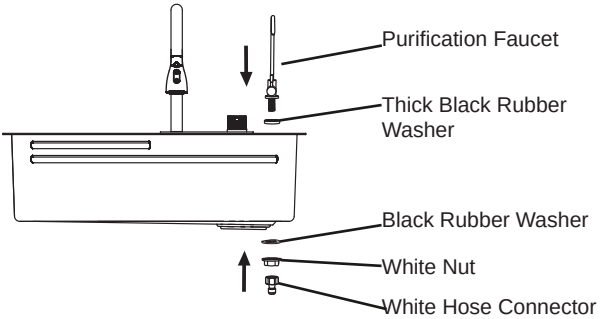


Step 9: Install the sink strainer.
● Lower down the strainer basket (⑥) into the hole inside the sink.
● Put a black rubber washer (⑥) through the bottom of the strainer basket from the sink bottom.
● Secure the central strainer (⑥) to the strainer basket by rotating it.

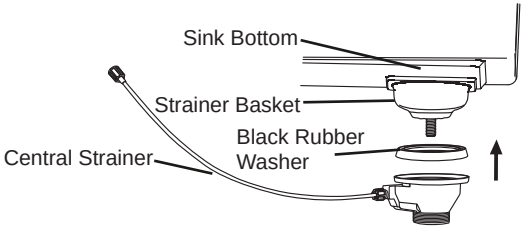




Flip the strainer and rotate the strainer basket clockwise to disassemble it into parts.

Step 10: Install the strainer console (⑤) on the sink as shown.

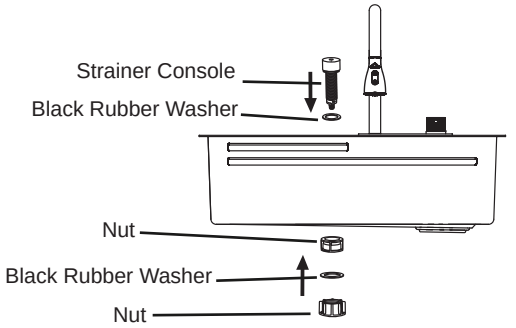


Rotate the nut in the bottom of the strainer console clockwise to disassemble it into parts.

Step 11: Connect the strainer console (⑤) to the central strainer (⑥) as shown.

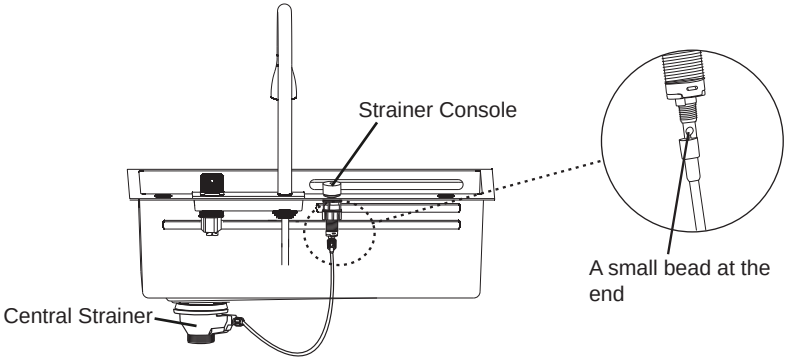


Step 12: Connect the sink drain coupling to the central strainer.

- Rotate the drain coupling (⑦) and secure it to the central strainer (⑥).
- Attach and secure the garbage disposer (⑦) to the drain coupling by rotating it.

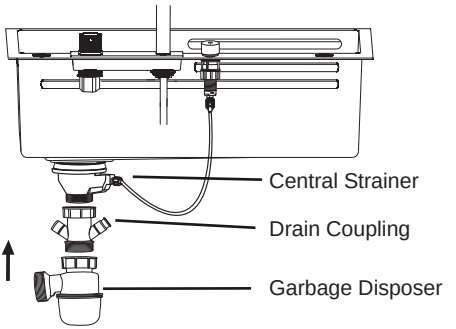


Step 13: Connect the overflow hose and the sink drain coupling.


- Put a blue rectangle rubber washer (⑧) to the upper end of the overflow hose (⑧) and attach it to the sink from outside.
- Secure it from the inside using the bolt and screwdriver.

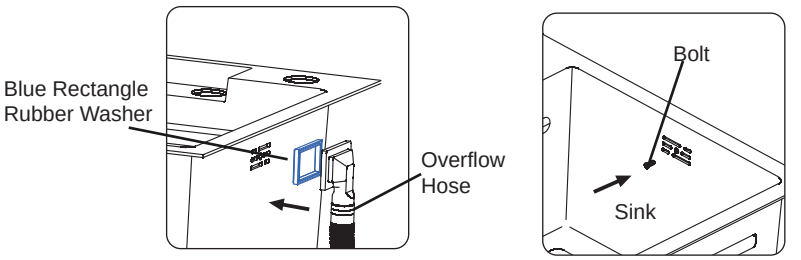


● Connect the overflow hose (⑧) to the sink drain coupling (⑦).

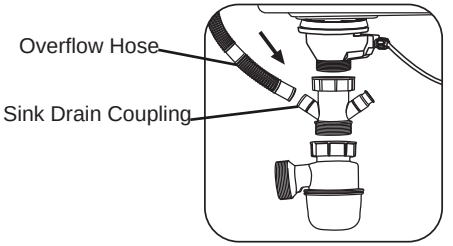

Step 14: Connect the sink drain coupling to the sewer system.
● Connect the drain hose to the sink drain coupling by rotating the nut.
● Connect the other end of the drain hose (⑨) to the connection point of the sewer system in the house with a connector (⑨).

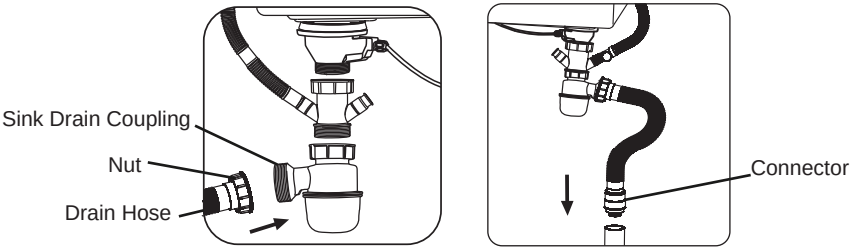


Step 15: Connect the water supply hoses (⑮) to the water supply system in the house with two angle valves (⑩) and pay attention to the color indication (blue - cold water & red- hot water). Then, fasten the water inlet hose at the glass rinser bottom to the angle valve as shown.

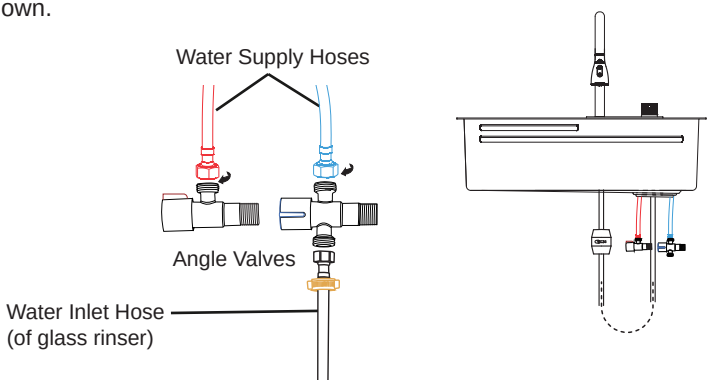

Step 16: Open the water supply system in the house and rotate the water console to ensure the water flow. The waterfall kitchen sink set is ready for use!


Use Instructions

(1) Water Console

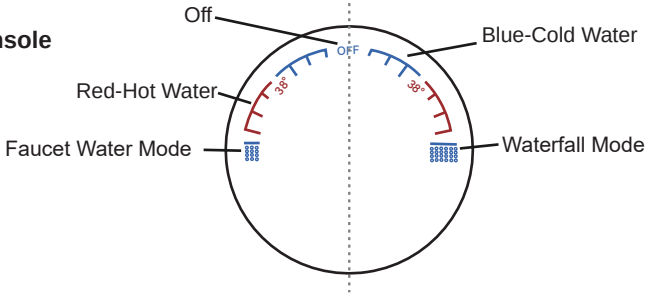


- For hot water, set the red scale to the middle.
- For cold water, set the blue scale to the middle.
- Turn left for faucet water mode and right for waterfall mode.

(2) Strainer Console

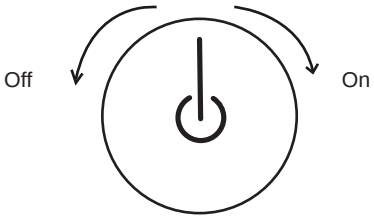

Turn right to switch on and turn left to switch off.

(3) Glass Rinser

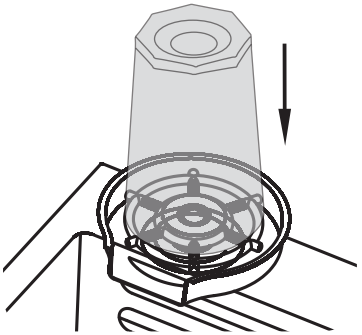

Place the cup/glass on the rinser and press down to rinse it.