


---

**WARNING** (To reduce the risk of fire, electric shock, or injury to persons):

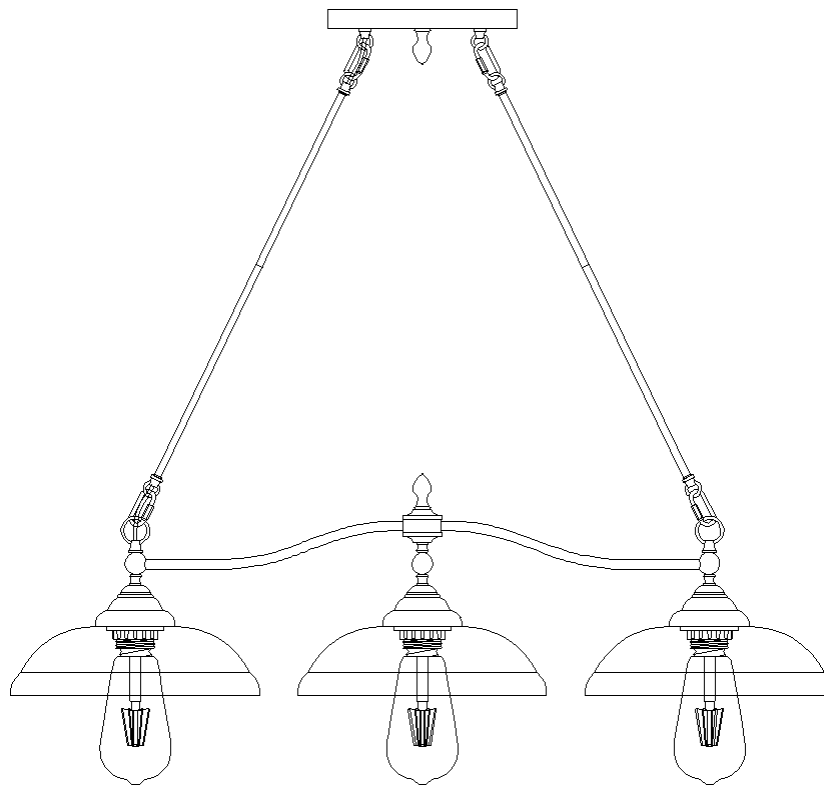


1. We suggest installation by a **licensed electrician**.
2. Please read the instruction carefully and save it as you may need it at later time.
3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done. A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the **"OFF"** position. B). Place the wall switch in the **"OFF"** position.
4. Mounting surface should be clean, dry, flat, strong enough and 1/4" larger than the canopy on all side. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
5. Make sure that the ceiling or wall can stand the weight of the lamp before fixture.
6. Make sure the voltage you are using is **120V**. The maximum wattage is **60W** per bulb.
7. Keep the lamp away from acidic and basic objects in case of damaging the surface of the lamp.
8. When replacing bulb, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

**IMAGE FOR FINISHED PRODUCT:**



**TOOLS REQUIRED (NOT INCLUDED):**

Before doing assembly and installation please prepare the needed tools as below picture


		
<p>Ladder</p>	<p>Phillips head, flat blade screwdriver</p>	<p>Electrical tape</p>

**PARTS TYPE & QTY INCLUDING:**

- (A) Single bar assembly (1)
- (C) Green ground screw (1)
- (D) Washer (1)
- (E) Hex nut (1)
- (F) Nipple (1)
- (H) Canopy (1)
- (I) Quick link (4)
- (J) Finial (1)
- (K) Arm (4)
- (L) Loop (4)
- (M) Socket cap (3)
- (N) Glass shade (3)
- (O) Socket ring (3)

**ACCESSORIES & QTY ENCLOSED:**

- (B) Mounting screw (2)
- (G) Plastic wire connector (3)

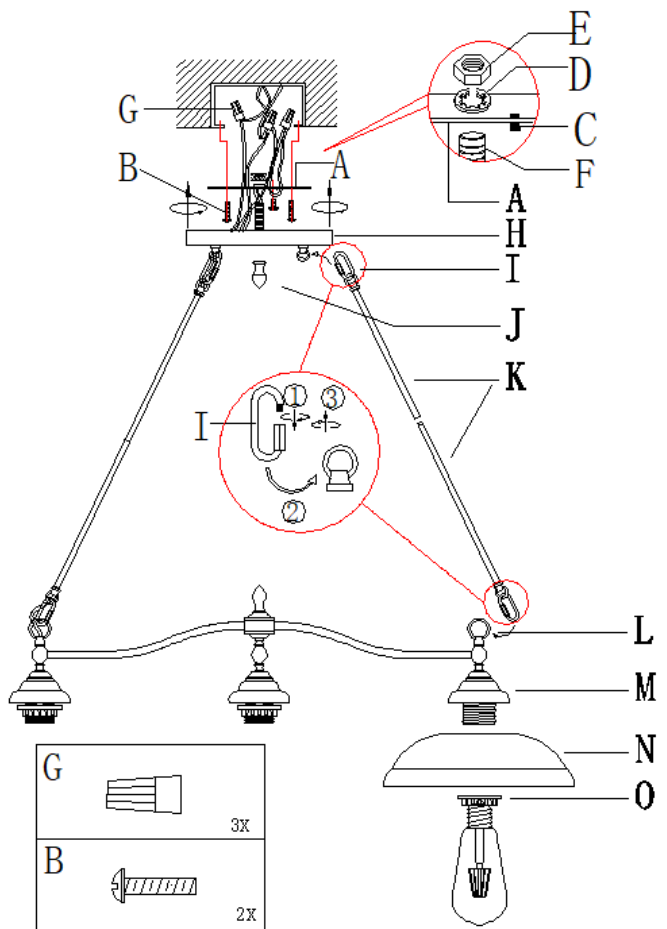


**ASSEMBLY & INSTALLATION INSTRUCTIONS:**

1. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration
2. Turn off power
 

Before you start to make installation, NEVER attempt any work without shutting off the electricity until the work is done. A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position. B). Place the wall switch in the "OFF" position.

### 3. Make installation

- 1) Open the quick links (I) to connect the arm(K) and the loop(L) on the top of socket cap (M), close the quick links(I).  
Open the quick links (I) to connect the arms (K) and the loop(L) at the bottom of canopy(H), close the quick link (I)  
Do the same steps to the another side of arms(K) assembly.  
Pass the wires through the loop(L) at the bottom of the canopy (H), gently pull the wires still snug

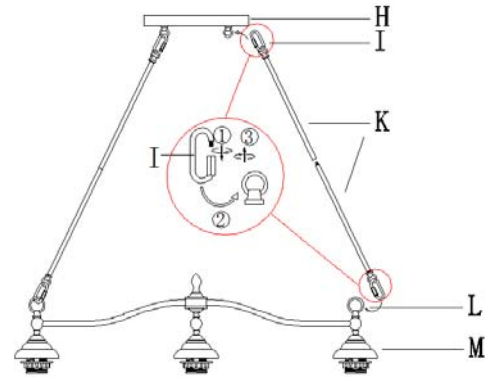


#### If more short hanging length needed .

The wire side :Unscrew the loop (L) and the threaded nipple from the arm, then pass the wires through your desired arm ,the threaded nipple and the loop(L),carefully thread the threaded nipple,the loop (L) onto the arm (K) till snug


No wire side: Unscrew the loop (L) and the threaded nipple from the arm(K), carefully thread the threaded nipple,the loop(L) onto the arm(K) till snug  
Open the quick links to connect the arm(K) and the loop(L) on the top of socket cap (K), close the quick link(I).

Open the quick links (I) to connect the arm (K) and the loop(L) at the bottom of canopy(H), close the quick link (I)

Pass the wires through the the loop(L) at the bottom of the canopy (H), gently pull the wires still snug.

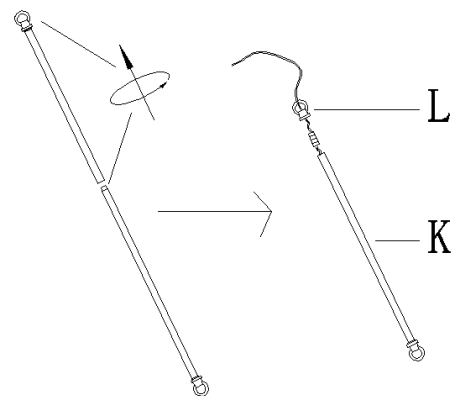

- 2) Unscrew the finial (J) from the canopy (H) then remove the single bar assembly (A) from the canopy (H)
- 3) Unscrew socket rings(O) from sockets, then position glass shades(N) over the sockets. And secure with the socket rings (O)
- 4) Attach the single bar assembly(A) to outlet box with the mounting screws (B)

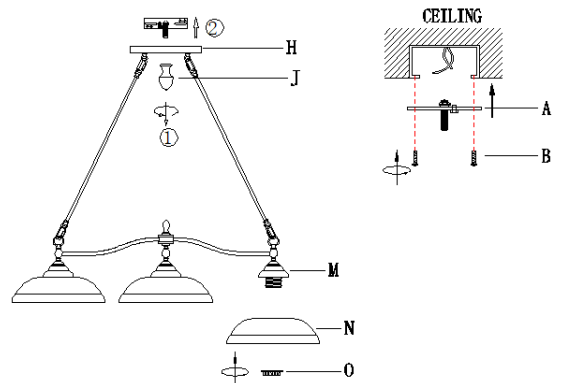


#### 5) Make wire connections

Connect wires as below wires connecting shown. **TAKE NOTE OF YOUR WIRE COLOR OF FIXTURE ,NEVER CONNECT WIRE TO GROUND WIRE**


#### Connect ground wire according to below chart

#### Connect wires according to below chart

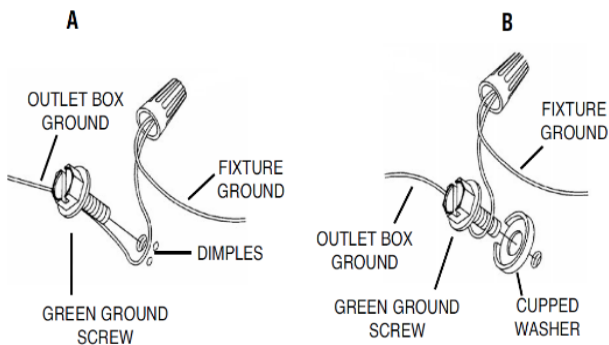

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor


\*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)




Twist plastic wire connector(G) until wires are tightly joined together,wrap each connector with approved electrical tape and carefully tuck all wires into the outlet box.

- 6) Raise canopy (H) to ceiling and secure canopy (H) in place by tightening finial (J) onto nipple(F)

**Note: The canopy (H) should be snug against the ceiling and the mounting balls. If not, adjust the length of the nipple on the single bar assembly (A) by unscrewing the preassembled hex nut and then screwing the nipple in or out of the single bar assembly (A) until the length is achieved. Tighten the hex nut and proceed to canopy installation**

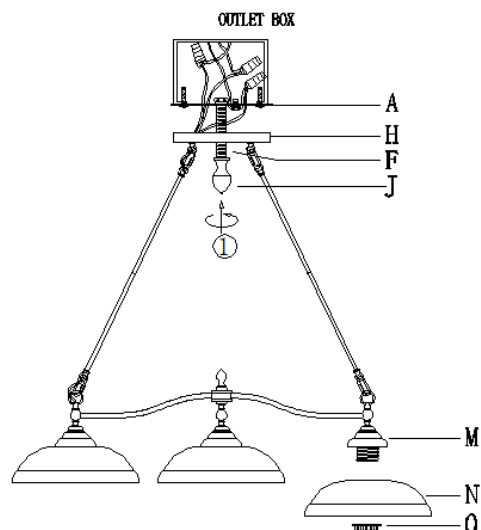

- 7) Install bulbs (Not included). Please do not exceed the maximum wattage capacity recommended on the socket.

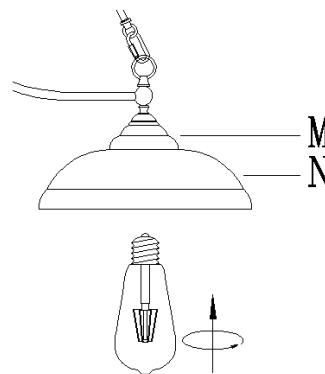

**4. Check everything is already installed properly, then you could turn on the light . Enjoy !**

#### **CLEANING**

To clean, wipe fixture with a soft cloth. Clean glass with a mild soap. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

#### **ORDERING PARTS**

Keep this sheet for future reference, and in case you need to order replacement parts. All parts for this fixture can be ordered from place of purchase. Be sure to use exact wording from illustration when ordering parts.