



Gradient® | K-709063-D3

42-5/8"-47-5/8" W x 70-1/16" H sliding shower door with 1/4"-thick Frosted glass

Features

- Frameless 1/4" (6 mm) thick frosted tempered glass
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)
- Reversible top track offers a choice of curved or flat profile
- Tempered glass ensures enhanced safety and durability



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-29-2026 23:42 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ANSI Z97.1 (Tempered Glass)

CAN/CGSB-12.1

CPSC 16CFR 1201

Technical Information

All product dimensions are nominal.

Base-To-Wall Radius – 5/8" (16 mm)
Maximum:

Technology

- Improved bypassing mechanism for smoother feel
 - Solid-metal contemporary towel bar design
-

Warranty

See website for detailed warranty information.

KOHLER® Bath and Shower Doors Ten-Year Limited
Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-29-2026 23:42 - US-CA

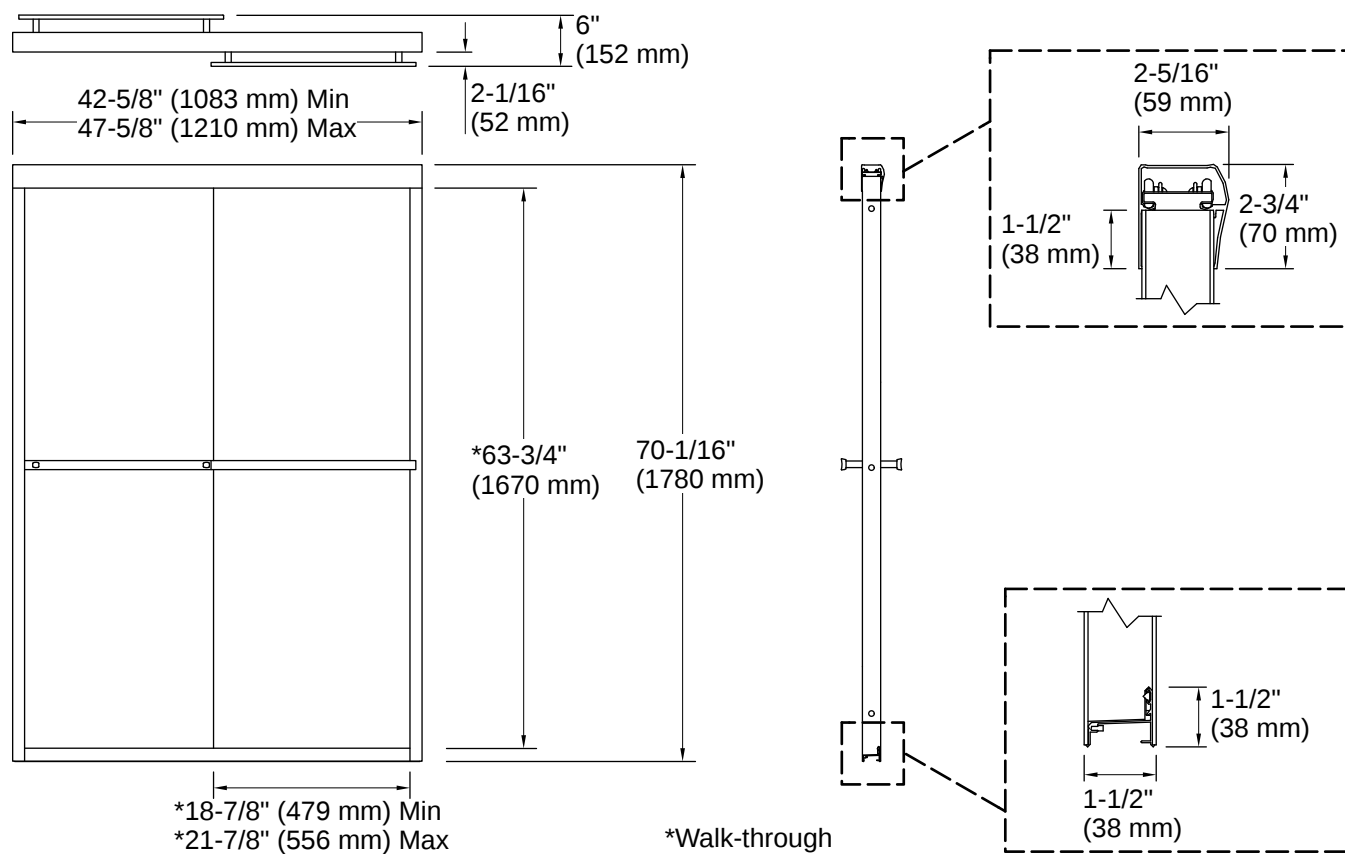

Installation

- Out-of-plumb adjustability simplifies installation
- Sliding shower door
- Not for use in hospitality

Installation Notes

Install this product according to the installation instructions.

The vertical opening should be a minimum of 72" (1829 mm) to allow for installation clearance.

