


INSTALLATION MANUAL

Ceiling Fan With Lights

Model No.: CFL-1303-01

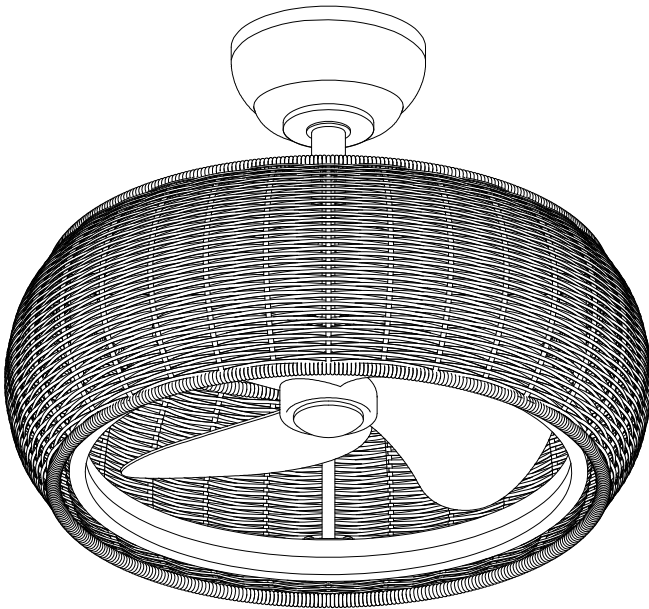

APP Control Applicable

Safety Rules

1. Be sure the power to the wires you are working on is disconnected, either the fuse is removed or the circuit breaker is turned off. Turning the power off using the light switch is not sufficient to prevent electrical shock.
2. A qualified licensed electrician is required for the installation.
3. The outlet box and support structure must be securely mounted and capable of reliably /supporting a minimum of 70 pounds. Use only UL (cUL for Canadian Installation) listed mounting boxes marked "FOR FAN SUPPORT".
4. The fan must be mounted with a minimum of 7 feet clearance from the trailing edge of the blades to the floor.
5. Do not operate reversing switch while fan blades are in motion (if applicable). The fan must be turned off and the blades stopped before reversing the blade direction.
6. Do not place any objects in the path of the blades.
7. To avoid personal injury or damage to the fan and other items, be cautious when working around or cleaning the fan.
8. Do not use water or detergents when cleaning the fan or fan blades. A dry dust cloth or lightly dampened soft cloth will be suitable for the cleaning.
9. After marking electrical connections, spliced conductors should be turned upward and pushed carefully up into the outlet box. The wires should be spread apart with the grounded conductor on one side of the outlet box.
10. Electrical diagrams are reference only, different fan lights may have different light shades and bulbs.
11. Use only our replacement parts. This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to part 15 of the FCC Rules. These limits are to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and radiate radio frequency energy and if not installed and used in accordance with the instructions may cause harmful interference to radio communications.

Warning:

To reduce the risk of personal injury, use only the two steel screws and washers provided with the outlet box for mounting to the outlet box. Most outlet boxes commonly used for the support of lighting fixtures are not acceptable for fan support and need to be replaced, consult a qualified electrician if in doubt.

To reduce the risk of fire, electric shock, or personal injury, mount the fan to the outlet box marked "acceptable for fan support".


To reduce the risk of personal injury, do not bend the blade brackets (also referred to as flanges) during assembly or after installation. Do not insert objects in the path of the blades.

Installation Preparation


Tools You Need




☒ Ladder




☒ Pliers



☒ Wire Strippers



☒ Screwdrivers




☐ Power Drill (optional)



☐ Drill Bit (optional)

What to Expect with Your Installation

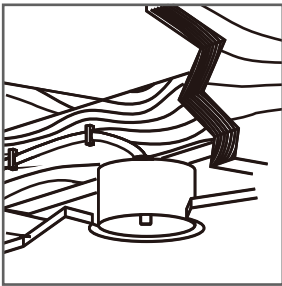


☒ Must be able to secure the fan to building structure or fan-rated outlet box




☒ Check the box to see the weight of the fan

Installation Angle

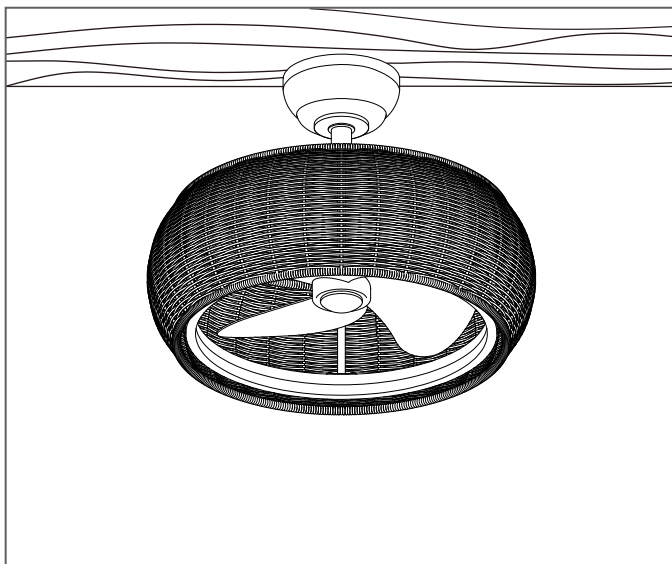

✓ Flat Ceiling

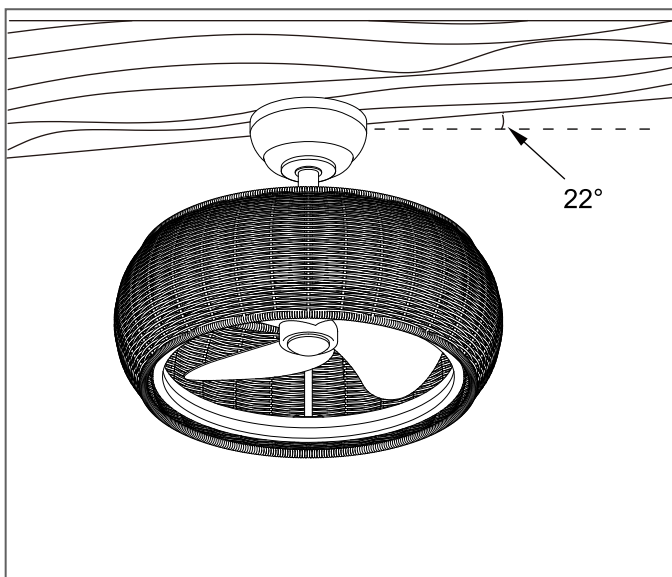

✓ Sloped Ceiling ($<22^\circ$)

Switch Selection


Note: Using a dimmer switch to control the fan may damage the fan. To reduce the risk of fire or electrical shock, do not use a dimmer switch to control the fan.

The recommended switches are as follows:

Recommended:	Single Pole Switch (Not Included)			
Not Recommended:	Dimmer Switch	Timer Switch	Fan Speed Control Switch	Motion Sensor Switch


Installation Recommended

Recommended Height:

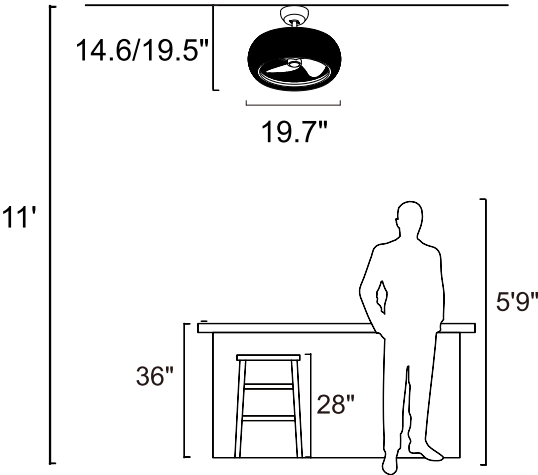


Recommended ceiling height: 8 to 12 ft.

Packing List

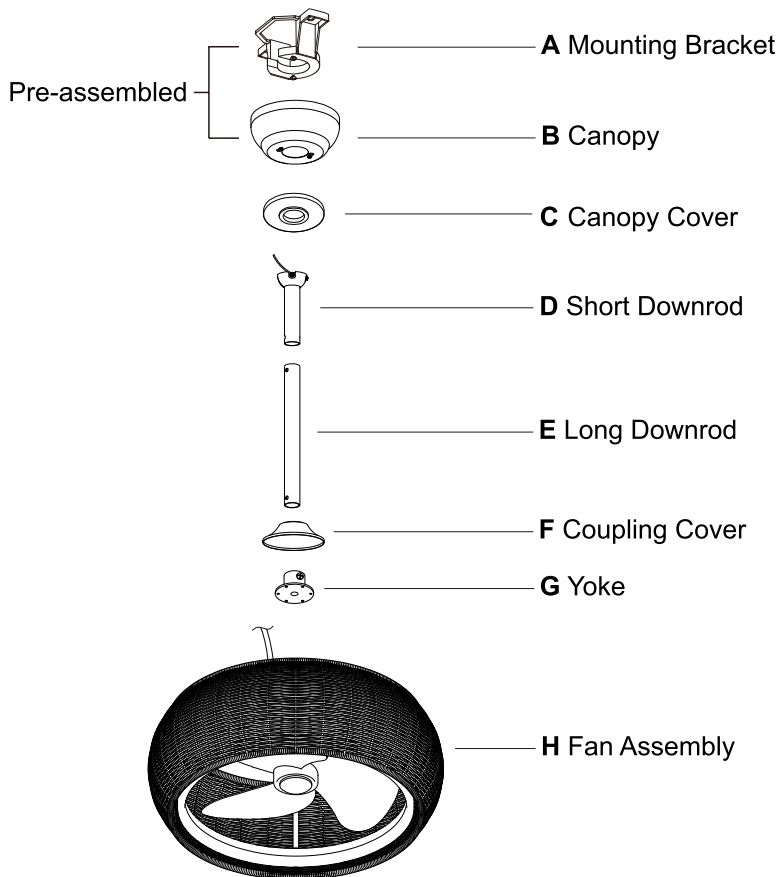

Installation Kit


AA		3x	BB		2x	CC		2x	DD		2x
Wire Nut			Outlet Box Screw			Wood Screw			Washer		
EE		2x	FF		1x	GG		2x	HH		1x
Plastic Anchor			Remote Control & Holder			Remotel Holder Anchor & Screw			Gloves		

- NOTE:**
1. The listed quantity is for installation, extra hardware may be included.
 2. The mounting bracket (A) is pre-installed on the canopy (B).

Installation Instructions

1. Remove the Mounting Bracket


Loosen the canopy screws on the mounting bracket (A), but do not remove them, and then rotate the canopy (B) to remove the mounting bracket (A).

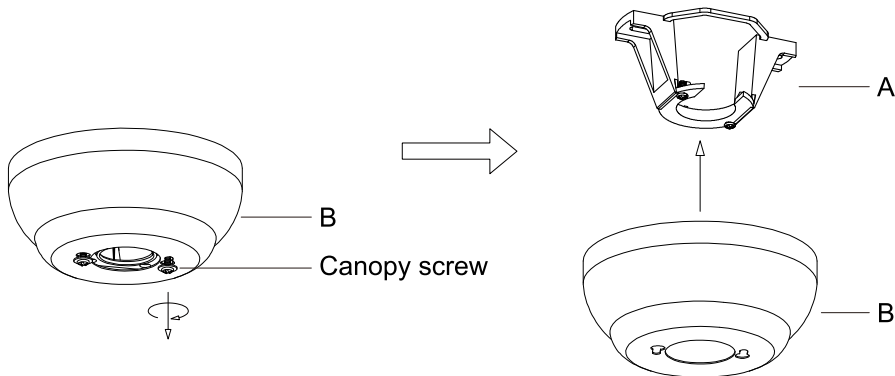

2. Mount the Bracket (3 Options)


Option 1. (For Outlet Box)

Secure the mounting bracket (A) to the outlet box with screws taken off from outlet box or screws (BB) provided.

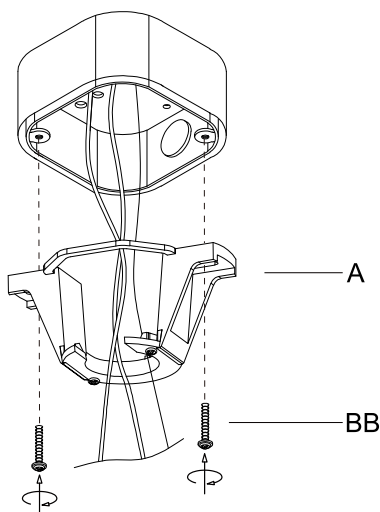


Option 2. (For Solid Wood Structure)

Mark and drill the screw holes on the solid wood structure. Mount the mounting bracket with wood screws (CC) and washers (DD).

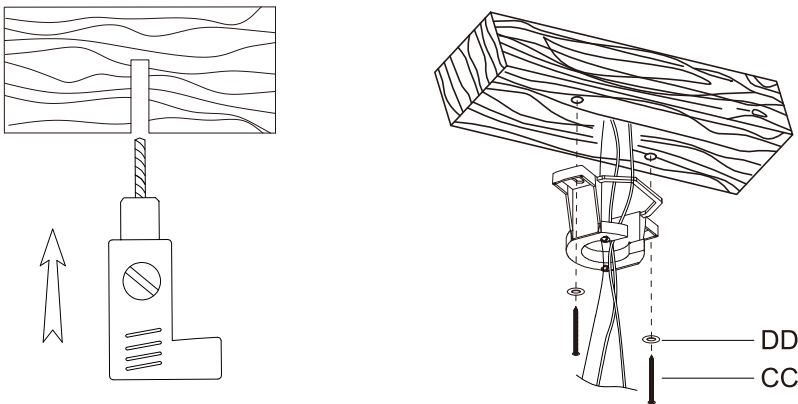

Option 3. (For Concrete Structure)


Mark and drill the anchor holes on the concrete structure, and then insert the anchors (EE). Mount the mounting bracket to the concrete structure with wood screws (CC) and washers (DD).

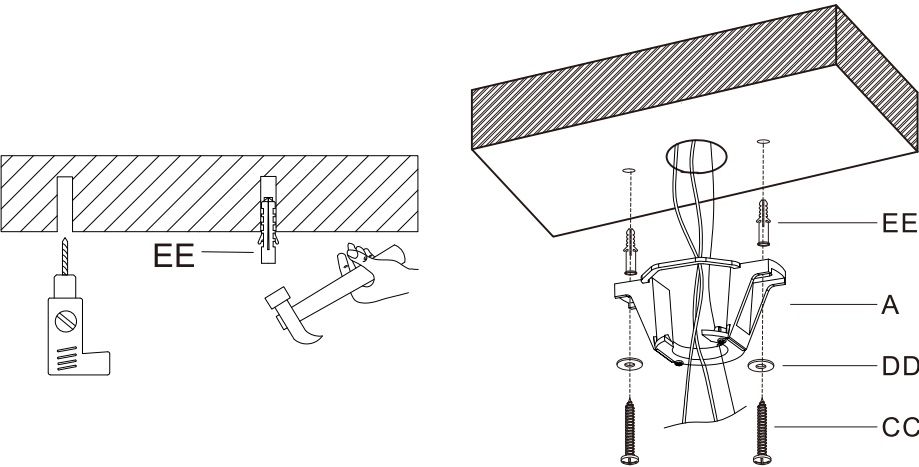

3. Install the Yoke


Step 1: Remove the yoke screws from the fan assembly (H).

Step 2: Align the screw holes of the yoke (G) with those of the fan assembly (H), then secure using the yoke screws.

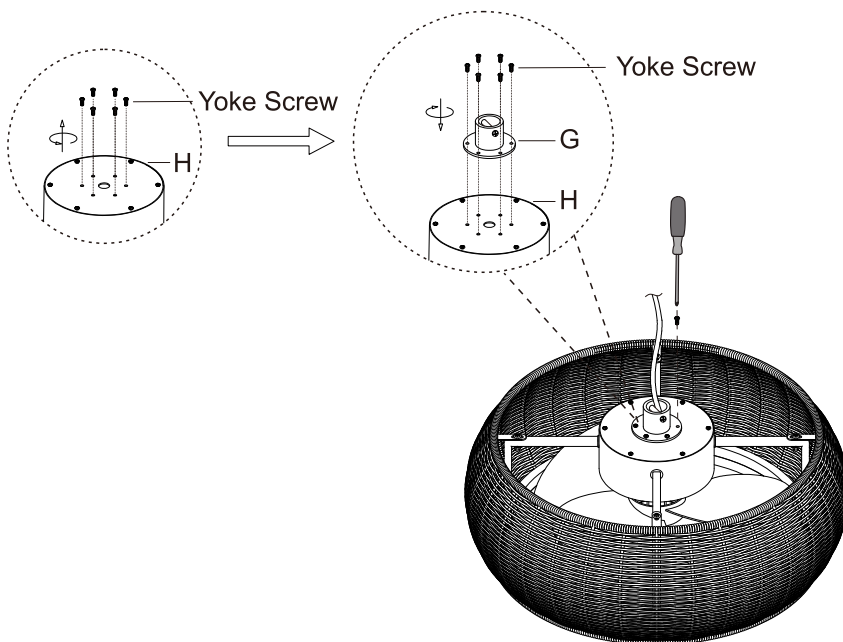


4. Install the Downrod

Step 1: Remove the R pin and clevis pin from the yoke (G).

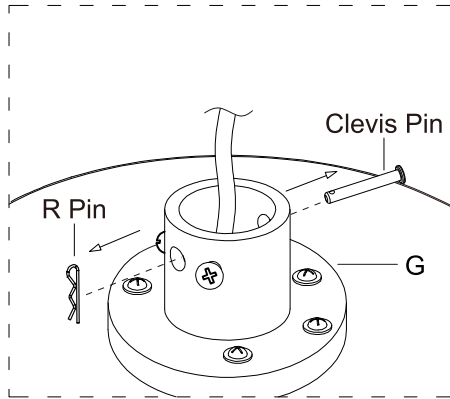


Step 2: Thread the downrod (D or E) through the canopy (B), canopy cover (C) and coupling cover (F).


Step 3: Thread the supply wire of the fan assembly (H) through the downrod (D or E).

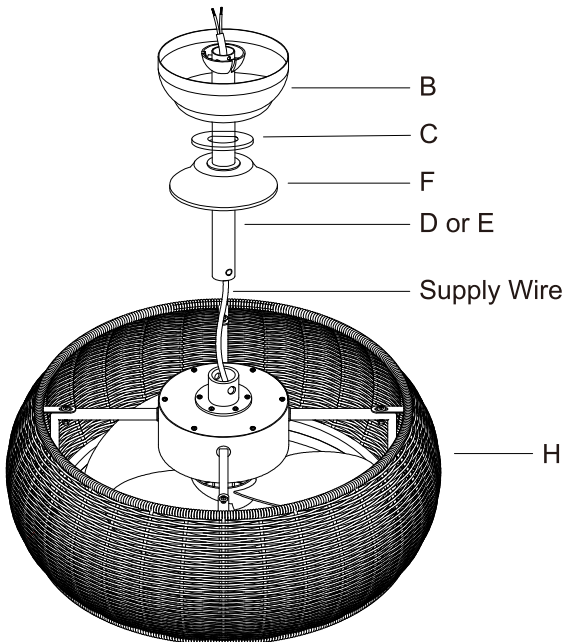


Step 4: Loosen the set screw on the yoke (G).

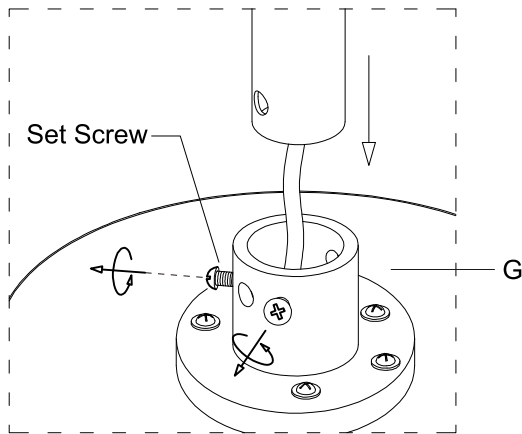

Step 5: Align the holes of the downrod (D or E) with those in the yoke (G), insert the clevis pin and R pin that were removed from the yoke (G).
Step 6: Tighten the set screw on the yoke (G) to secure the downrod (D or E).

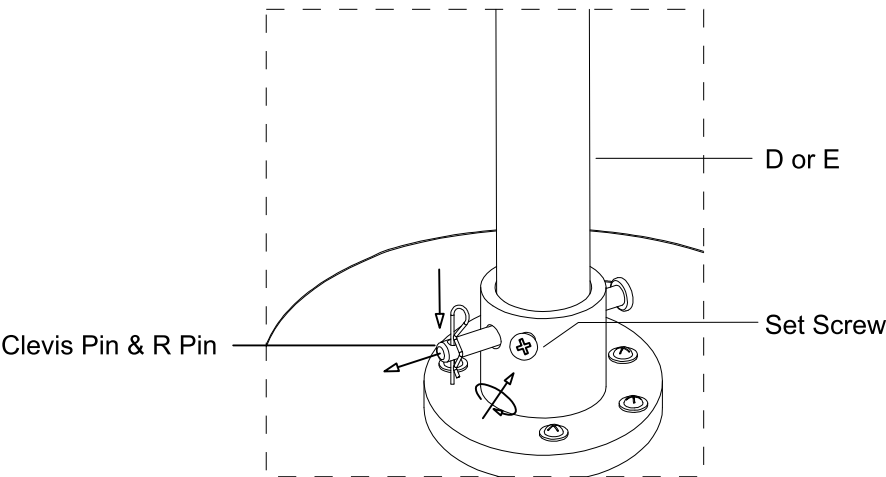


Step 7: Fit the coupling cover (F) onto the fan assembly (H).

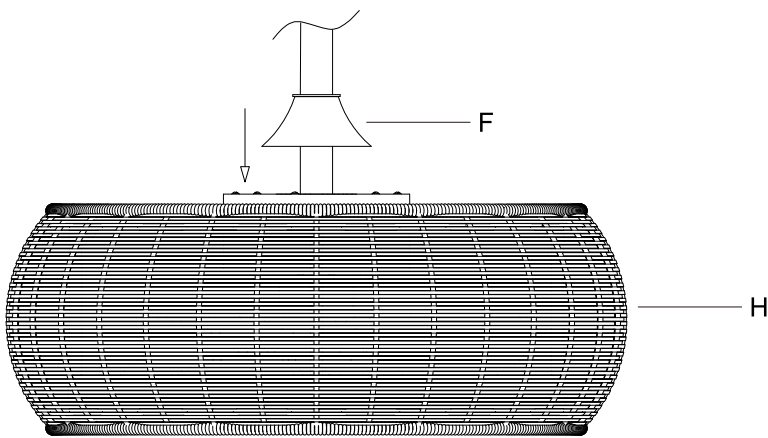


5. Hang the Fan

Lift the downrod (D or E) into the mounting bracket (A). Rotate the downrod until the tab in the bracket is seated in the groove in the downrod ball.

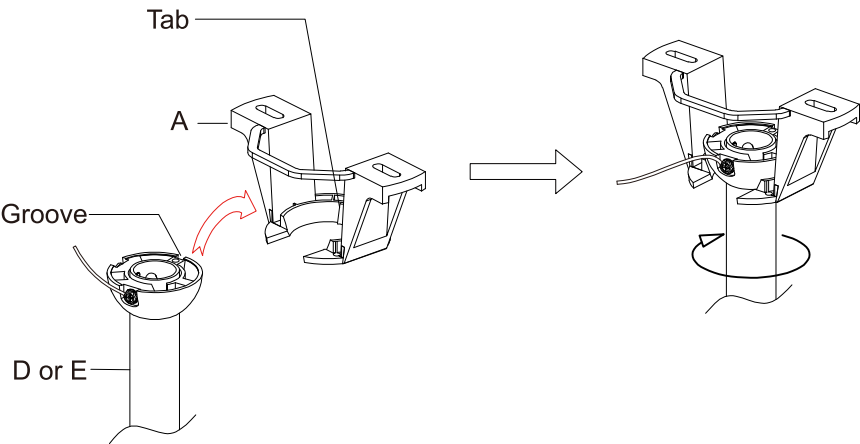


6. Connect the Wires

Connect the wires from the fan to the house supply wires with wire nuts (AA), ground wire (green, green/ yellow, or bare copper) to ground wire, neutral wire (white) to neutral wire, and hot wire (black) to hot wire. Wrap the connection with electrical tape.

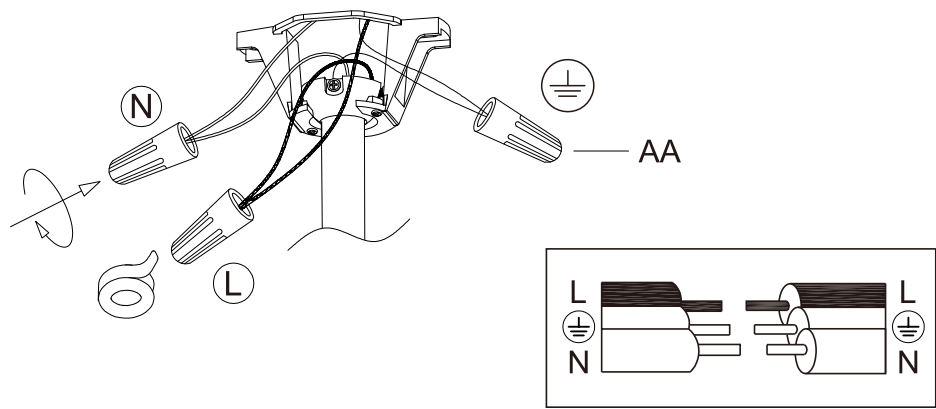


7. Fix the Canopy


Step 1: Raise the canopy (B) to the ceiling, twist it to lock onto the screws.

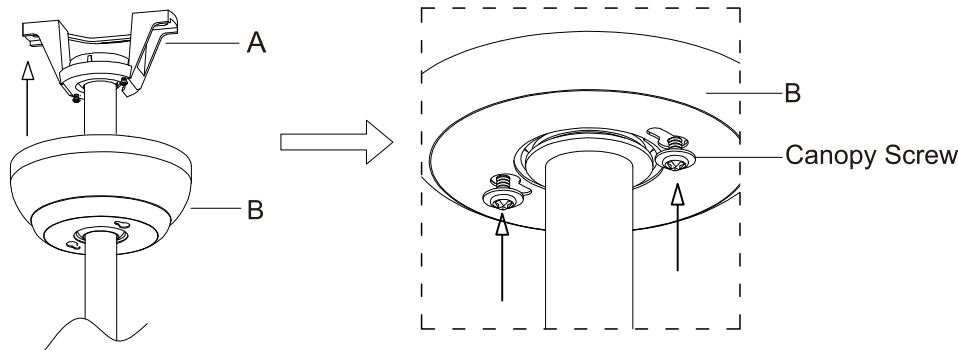


Step 2: Tighten the canopy screws to secure the canopy (B).

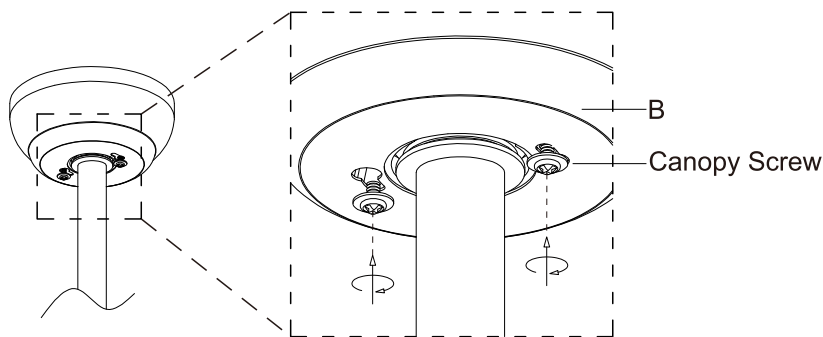

Step 3: Push canopy cover (C) upwards and attach it to canopy (B).

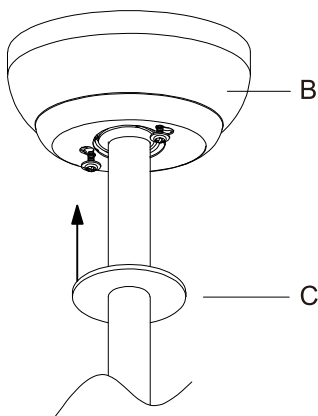

8. Install the Remote holder

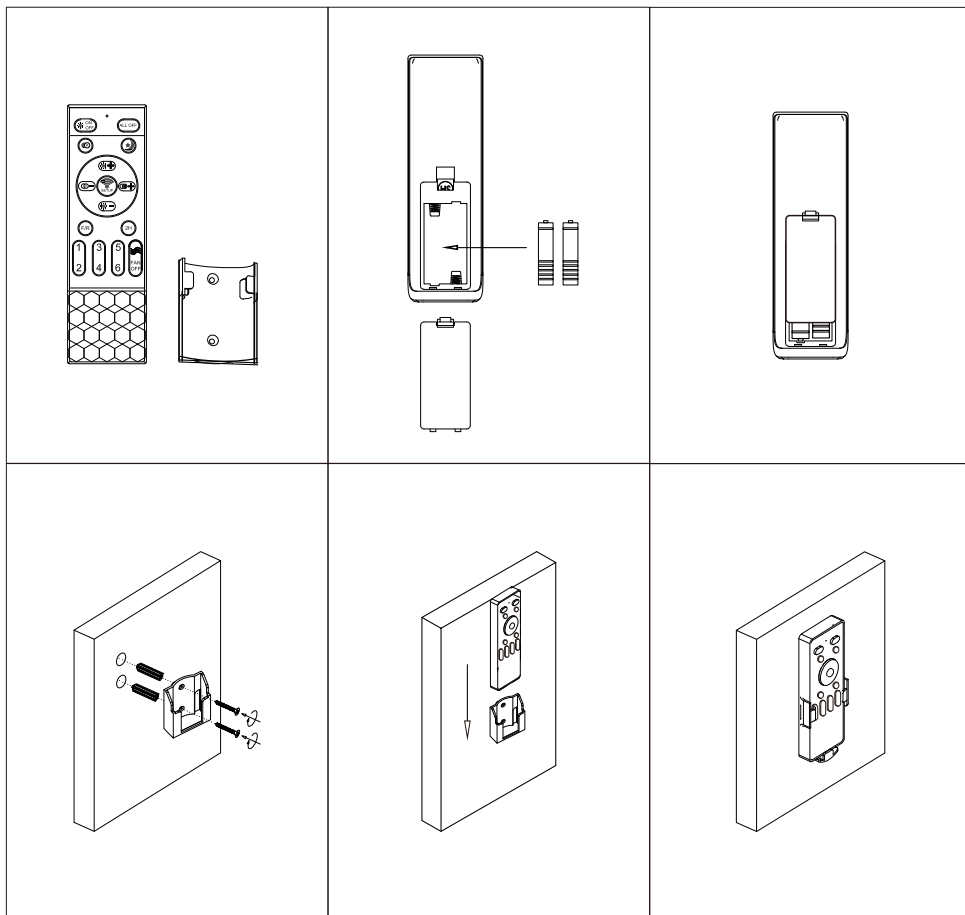


Step 1: Insert 2 batteries before using: AAA 1.5V battery x 2pcs (not included).

Step 2: Mark and drill screw holes in the wall, then insert the remote plastic anchors.


Step 3: Use remote wood screws to fix the remote holder onto the wall.

Remote Control Instructions

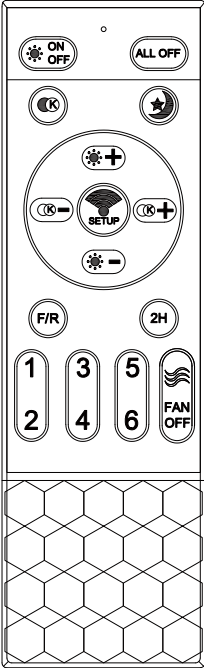		Turn o fffan and light
		Turn on/o fffan light
		Quick switch of the light color: Yellow Light → White Light → Natural Light
	 	Adjust the brightness of the light
	 	Adjust the light color temperature
		Night mode, lights will be dimmed
	     	Fan speeds 1 through 6
		Switch the fan's rotation direction between forward and reverse
		Natural Wind Mode: Fan speed automatically adjusts
		Turn o ffthe fan
		Set a 2-hour timer for the fan
	REMOTE SIGNAL PAIRING: If the remote control loses signal of the fan, press and hold the button  at the very beginning after it's turned on from wall switch. After the fan light flashes or beeps, it's done. Note: Please insert 2 batteries before using : AAA 1.5V battery x 2pcs (not included).	

APP Control Instructions

Install the "FanLamp Pro" app from Google Play, Apple App Store, or other app stores by scanning the QR code or searching for the app name. Ensure that your phone is connected to the internet and Bluetooth enabled.

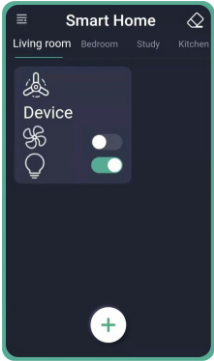  		Pairing: Click the Pair button within 5 seconds after turning on the fan from the wall switch. Once the fan flashes or beeps, it has been successfully paired with your phone and can now be controlled through the app.
		Turn on/off the light.
		Quick switch for "White" light color.
		Quick switch for "Yellow" light color.
		Quick switch for "Natural" light color.
		Night mode: Dim the lights.
		Slide the slider to change the brightness of the light.
		Slide the slider to change the fan speed.
		Fan moves forward.
		Fan moves reversely.
		Change the direction of the wind. (Not supported)
		Timing the fan.
		Natural wind: The fan speed will change automatically when you use this function
		Sleeping wind. (Not supported)
		Turn on/off the fan.
		Unpairing: Click the unpair button within 5 seconds after turning on the fan. Once the fan flashes or beeps, it has been successfully unpaired from your phone.

Trouble Shooting

1. Fan doesn't work

- Check the remote control battery (not included in this package).
- Check the circuit breaker to ensure the power is on.
- Check the connection of the power cord.

2. Lights Do Not Light Up / Flicker / Noisy Operation

- Check the circuit breaker to ensure the power is on.
- Check the connection of the power cord.
- Check the connection of the LED light source.

3. Noisy Operation

- Re-tighten all screws on the bracket, and fan blades (do not over tighten).
- Check to see if the blade is cracked. If so, contact us to replace it.

4. Remote does not work

- Make sure the battery is installed correctly.
- Pair the remote control again. (See "Remote Control Instructions")
- Install 2 new batteries.

Clean And Care

To clean, wipe the fixture with a soft cloth. Spraying from chemical cleaners can discolor the finish of the fixture. Do not use scouring pads, powders, steel wool, or abrasive paper to clean this fixture.

Ordering Parts

Keep this manual for future reference, and in case replacement parts are needed. Available parts can be ordered from the place of purchase. Use exact wording from diagrams when ordering parts.