


PLATFORM BED
















ORIGINAL INSTRUCTION MANUAL





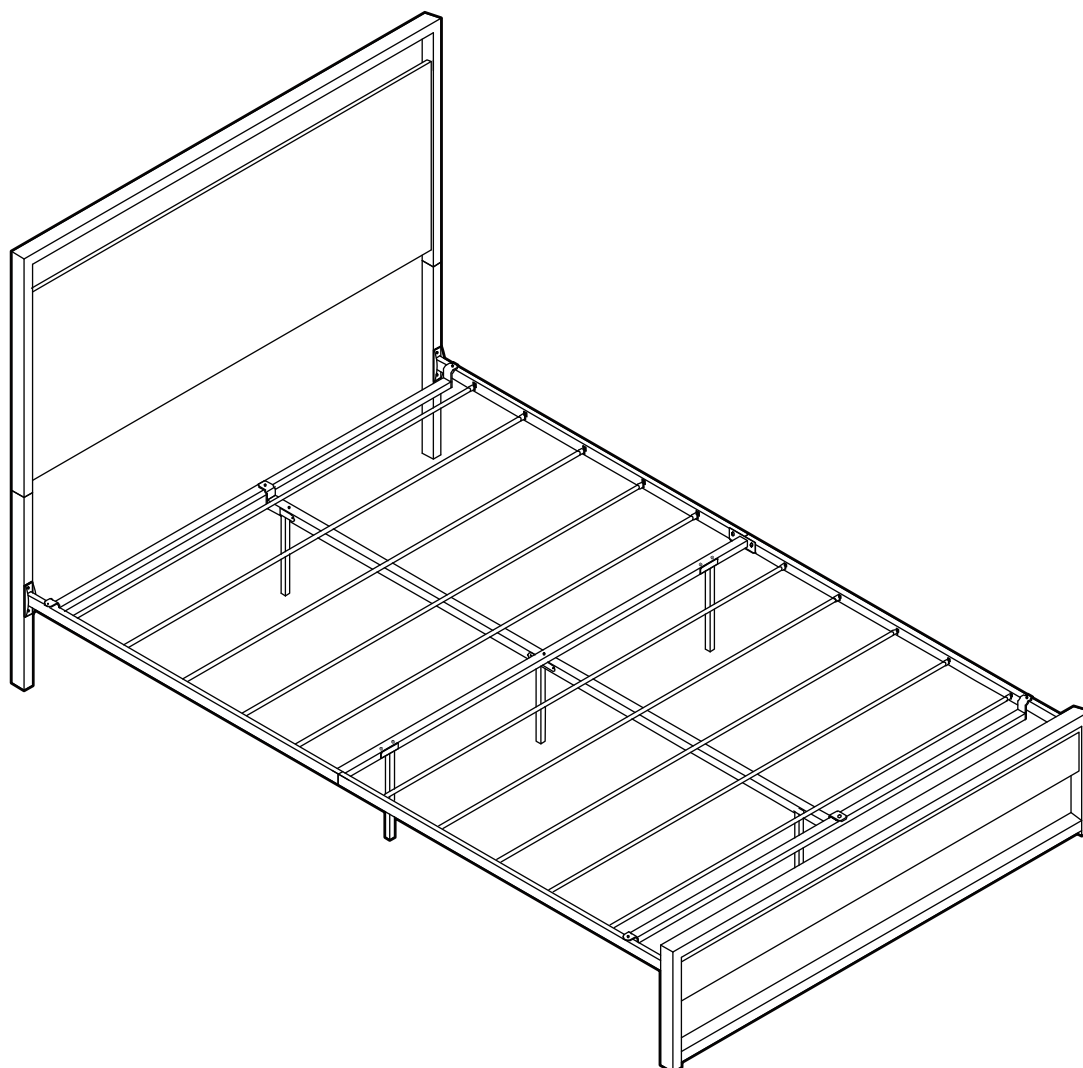

DEAR CUSTOMER,

Thank you for choosing our product. Please read this manual carefully before assembling or using the product, to avoid damage caused by improper use. If the product is passed on to third parties, this manual has to be passed on along with the product. For any question don't hesitate to contact us.

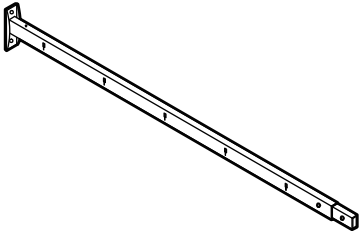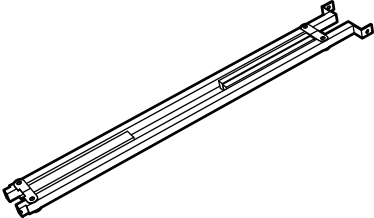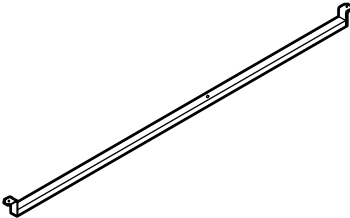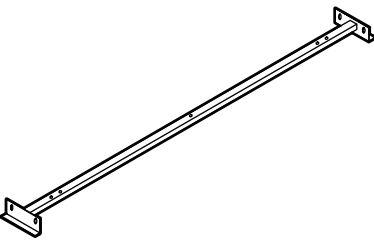PARTS LIST


| | | |
|--|---|---|
| <p>A</p>  <p>1×</p> | <p>B</p>  <p>1×</p> | <p>C</p>  <p>1×</p> |
| <p>D</p>  <p>1×</p> | <p>E</p>  <p>2×</p> | <p>F</p>  <p>2×</p> |
| <p>G</p>  <p>1×</p> | <p>H</p>  <p>2×</p> | <p>I</p>  <p>1×</p> |
| <p>J</p>  <p>2×</p> | <p>K</p>  <p>10×</p> | <p>L</p>  <p>20×</p> |
| <p>1</p>  <p>22×</p> <p>1/4"×13MM</p> | <p>2</p>  <p>4×</p> <p>1/4"×25MM</p> | <p>3</p>  <p>2×</p> <p>1/4"×35MM</p> |

| | | | | | | | |
|---|----|---|----|--|----|---|----|
| 4 | 1× | 5 | 4× | 6 | 1× | 7 | 1× |
|  | |  | |  | |  | |
| 1/4"×50MM | | M8×13MM | | 4MM | | 5MM | |


ASSEMBLY

Before your installation, please make sure that you have all the parts listed on the manual. If you find something missing, stop installing and contact your supplier immediately.


NOTE: Please do not completely tighten all the hardware until the entire assembly is completed!

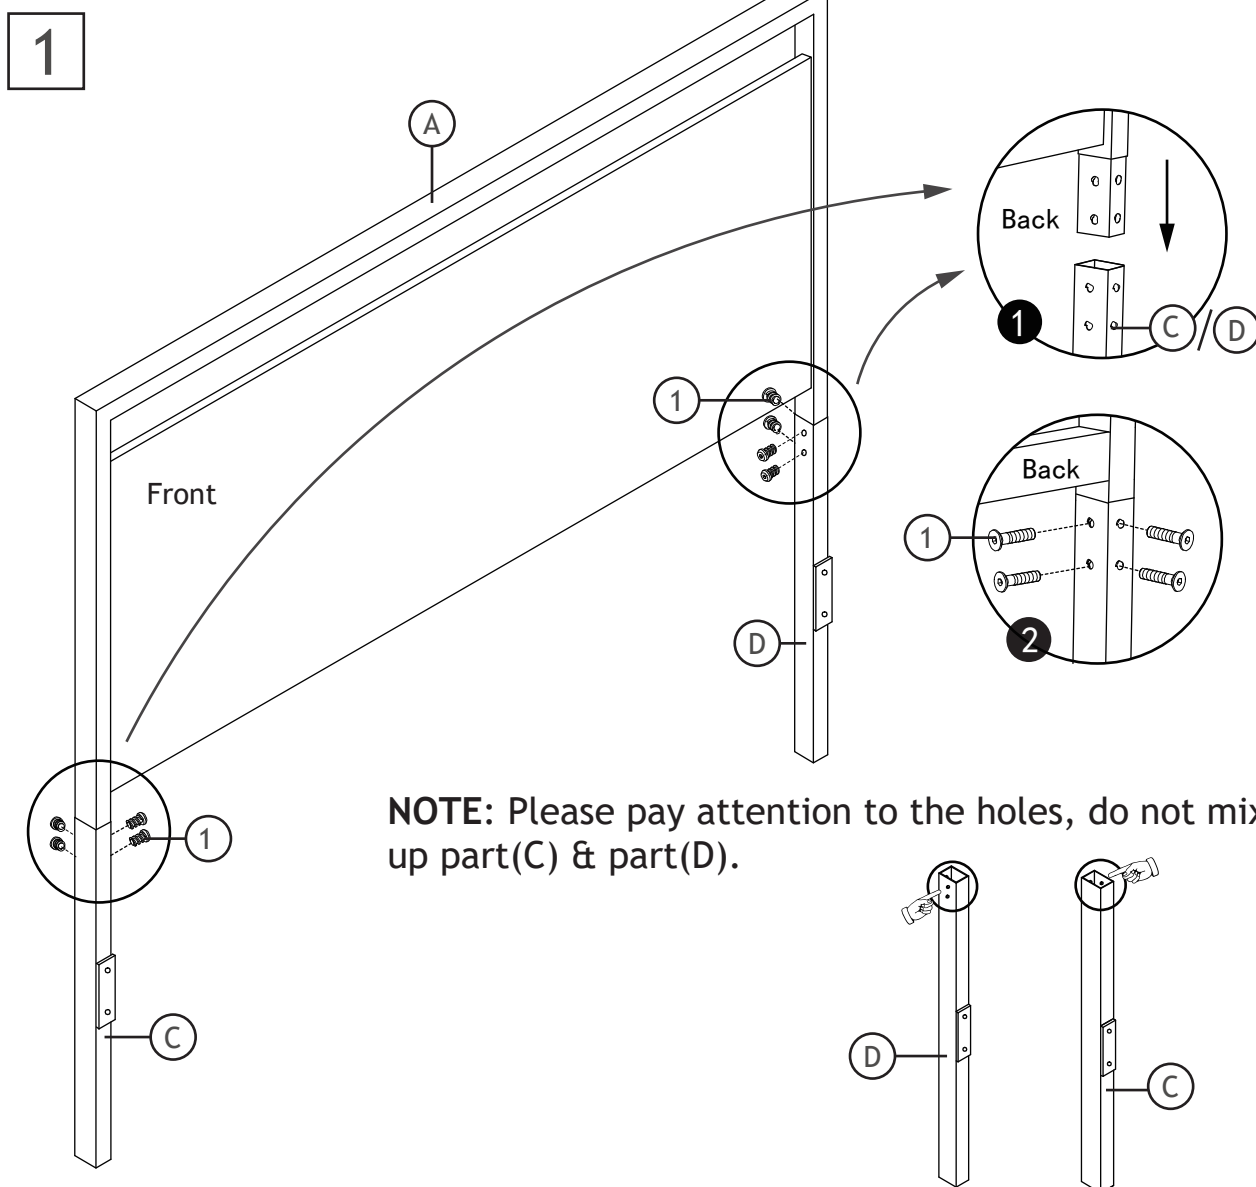


2

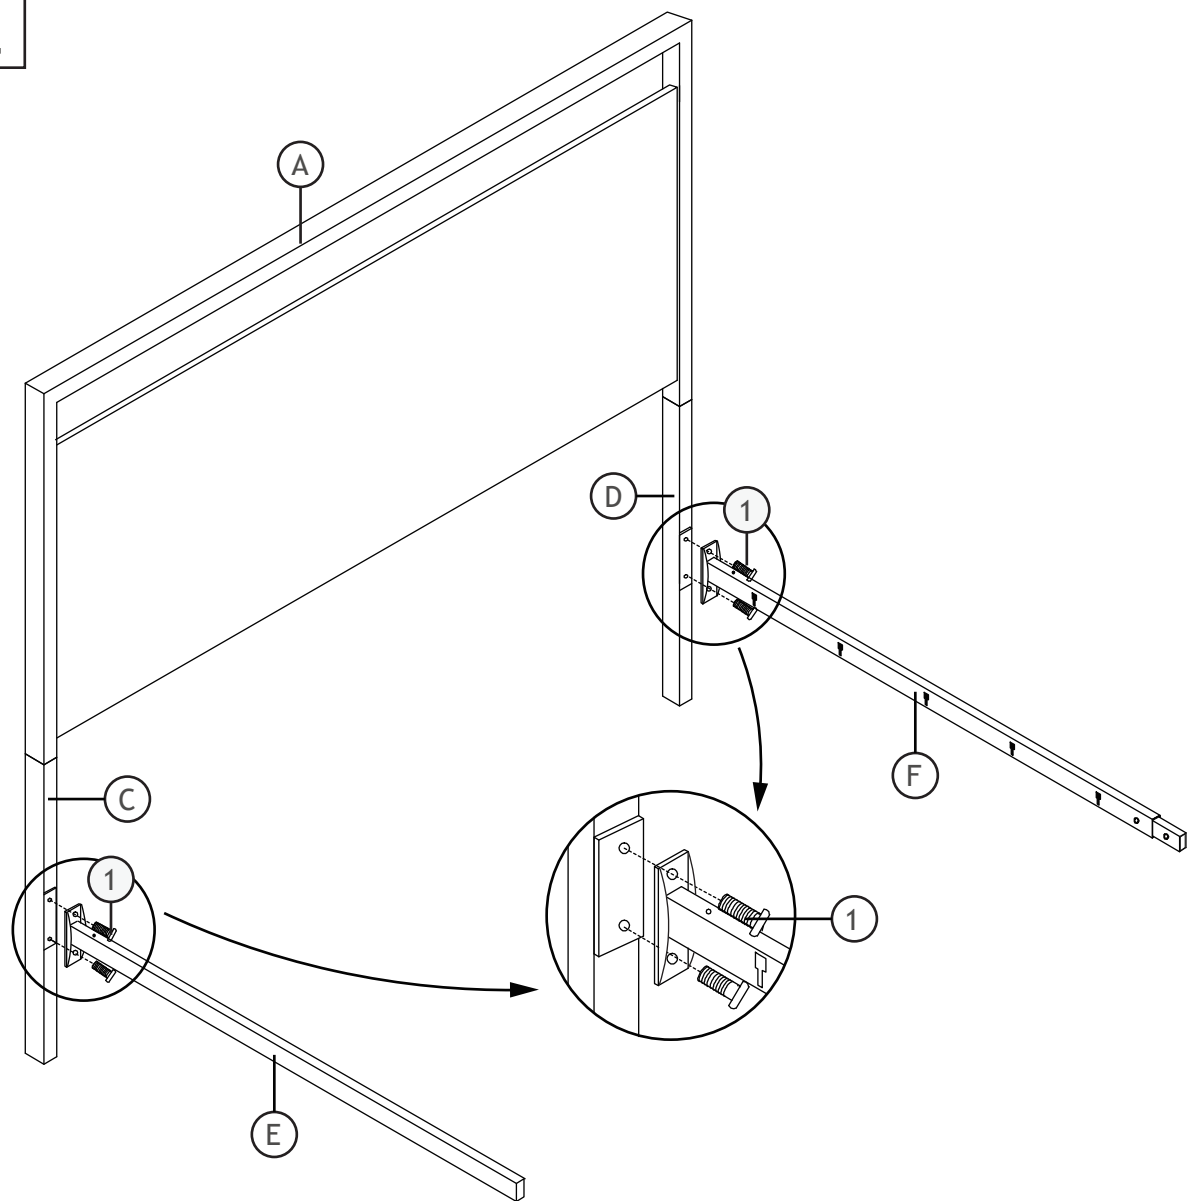


3

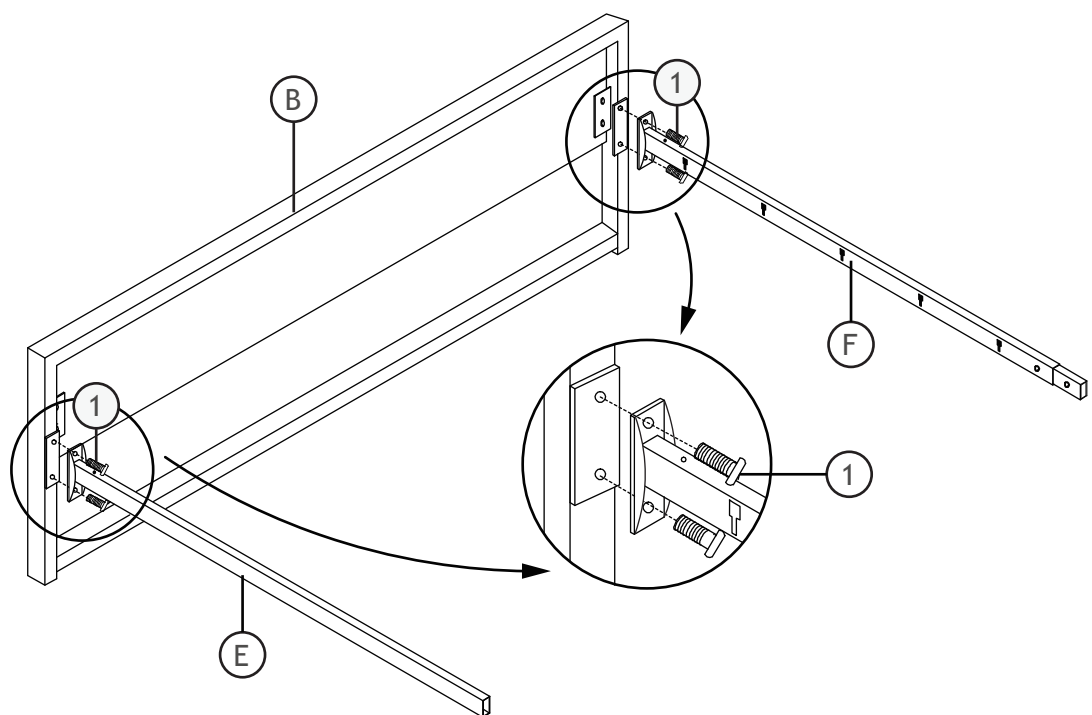


4

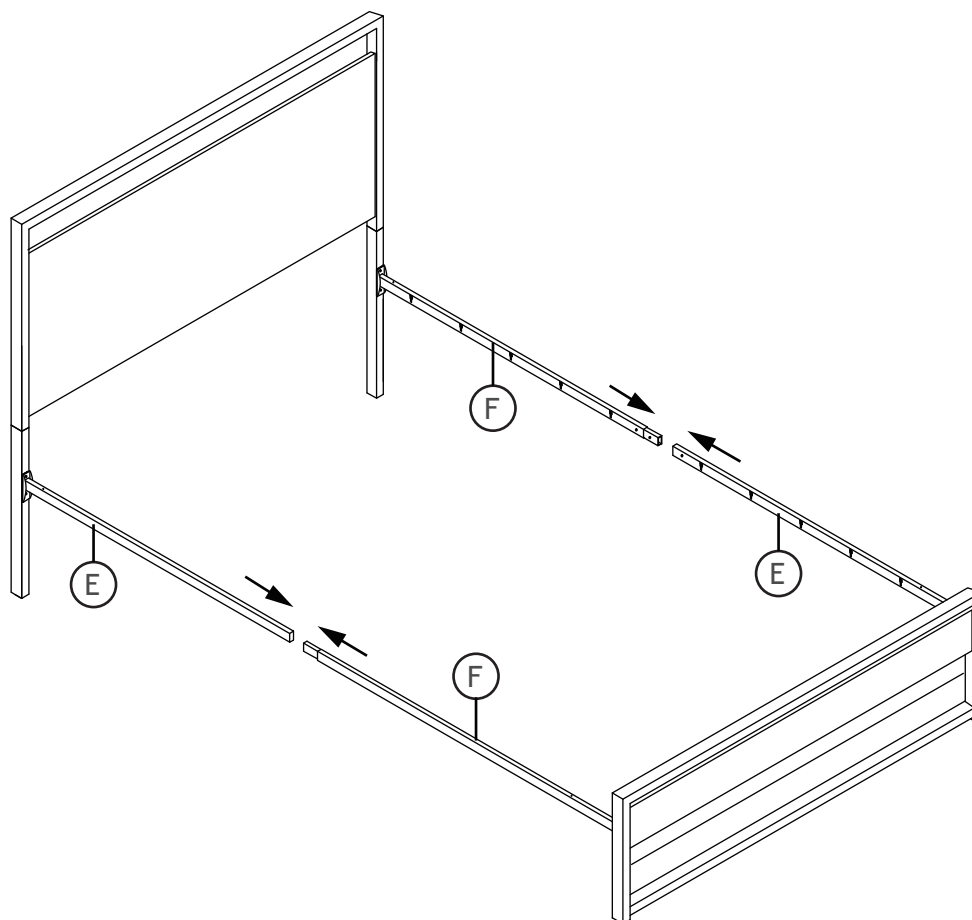

5

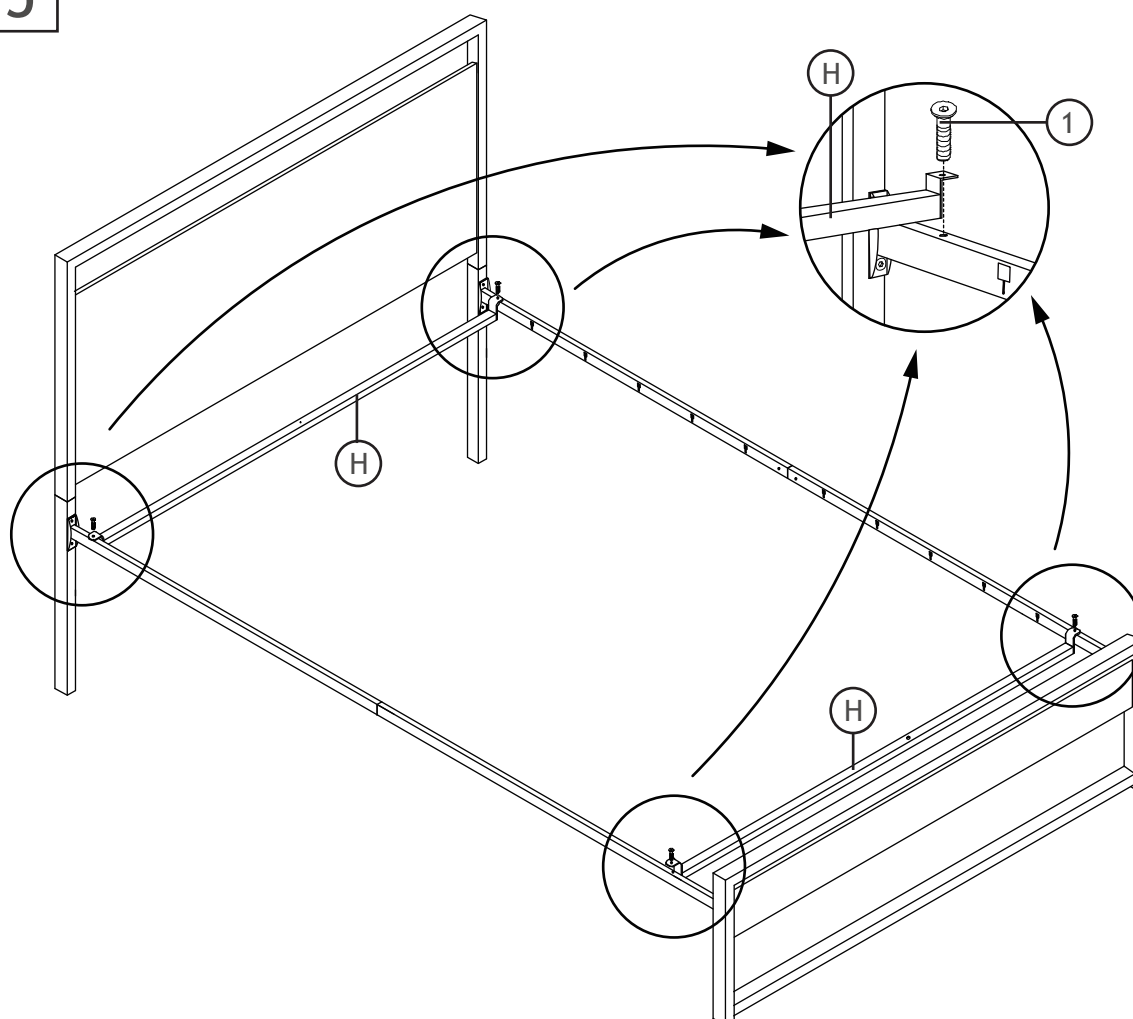


6

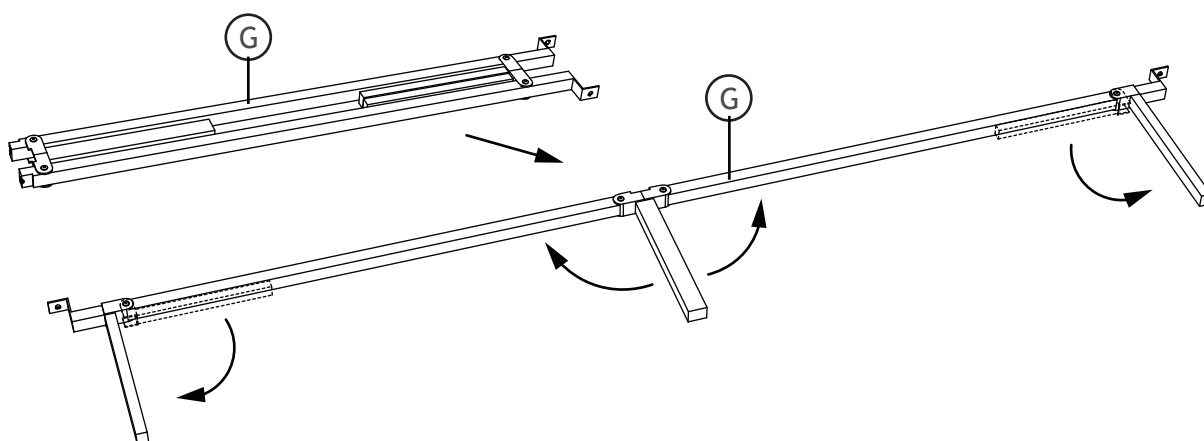


Expand the folded portion


7

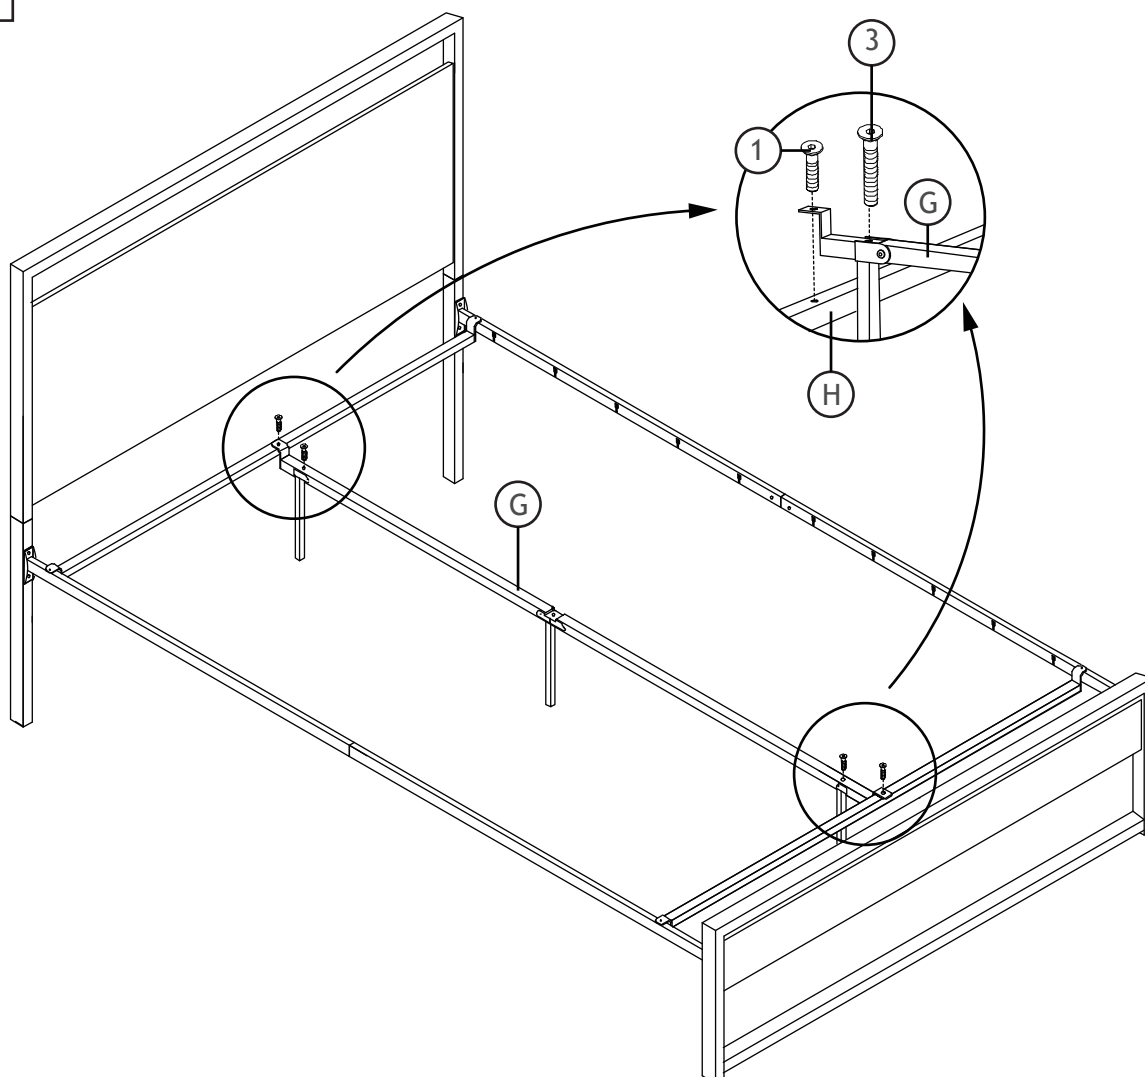




8

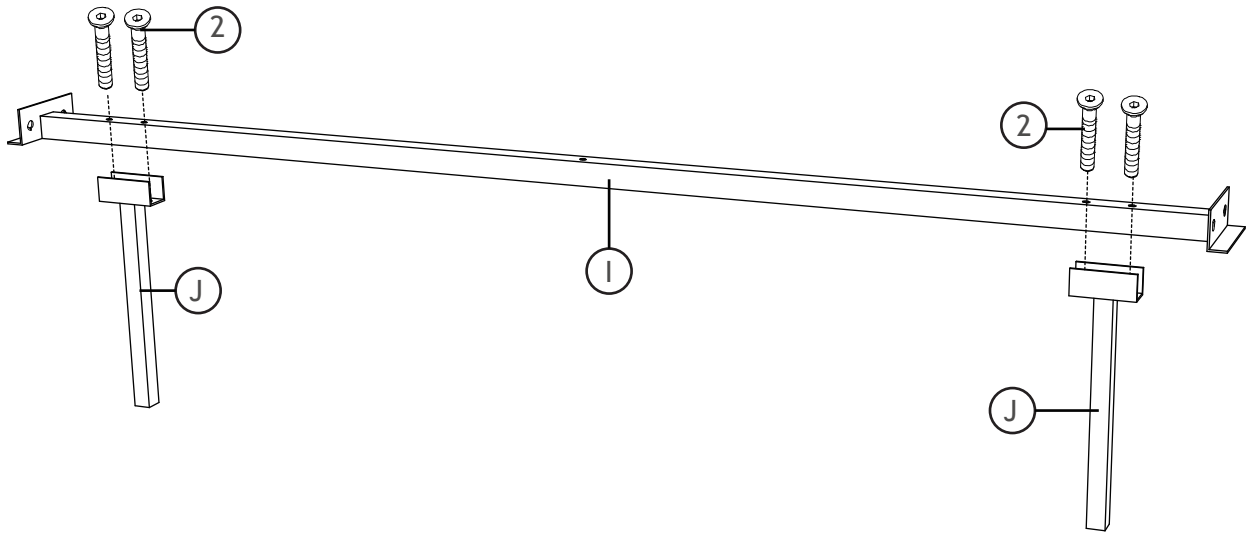

9

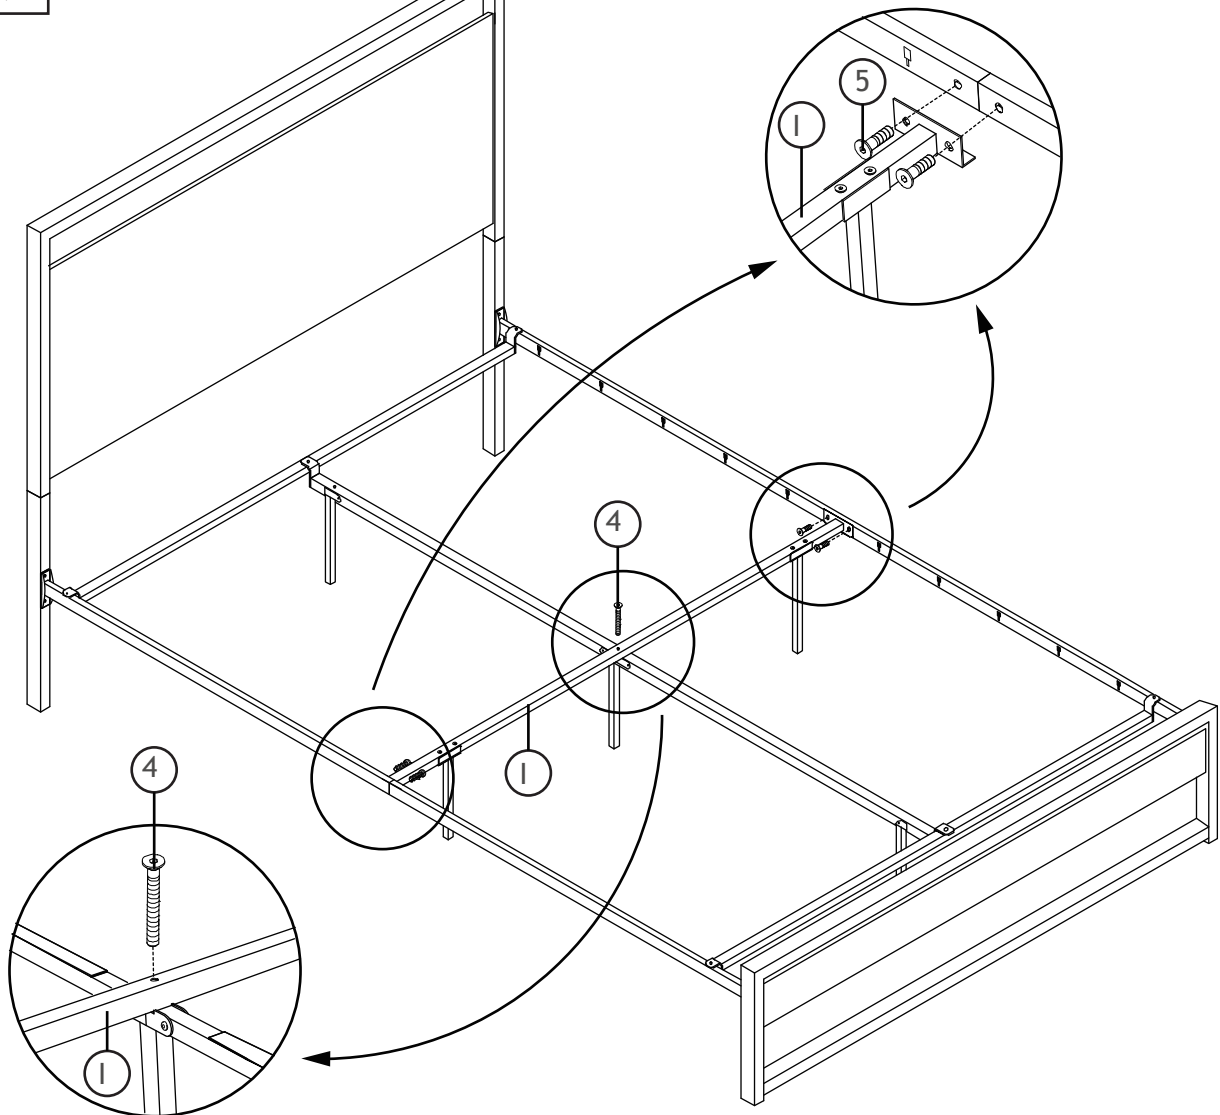



10

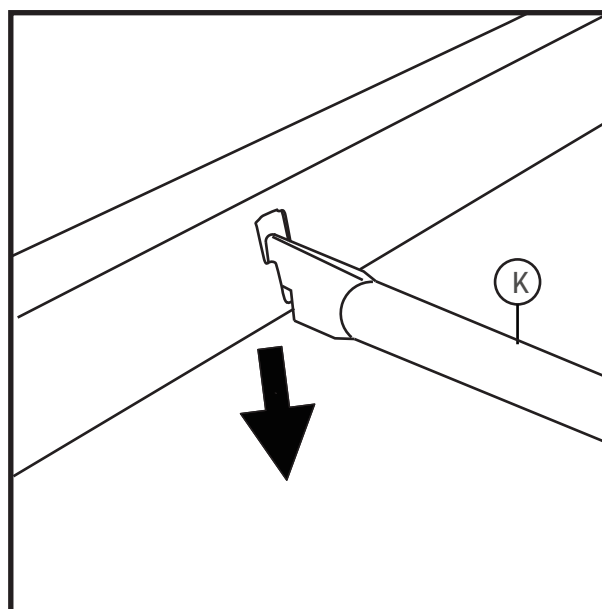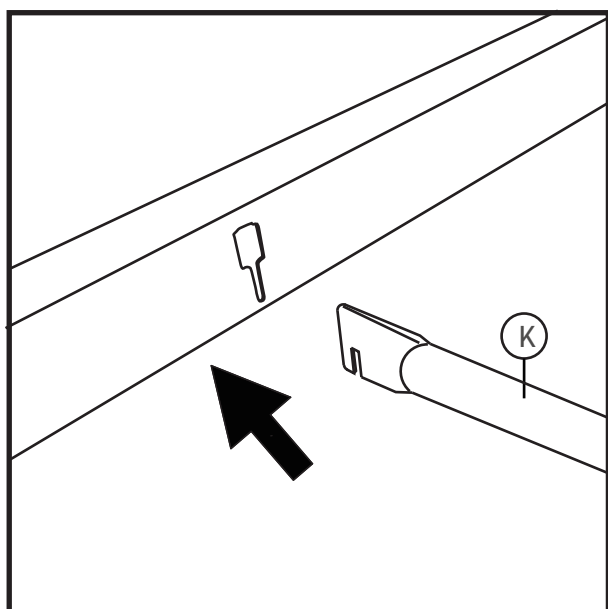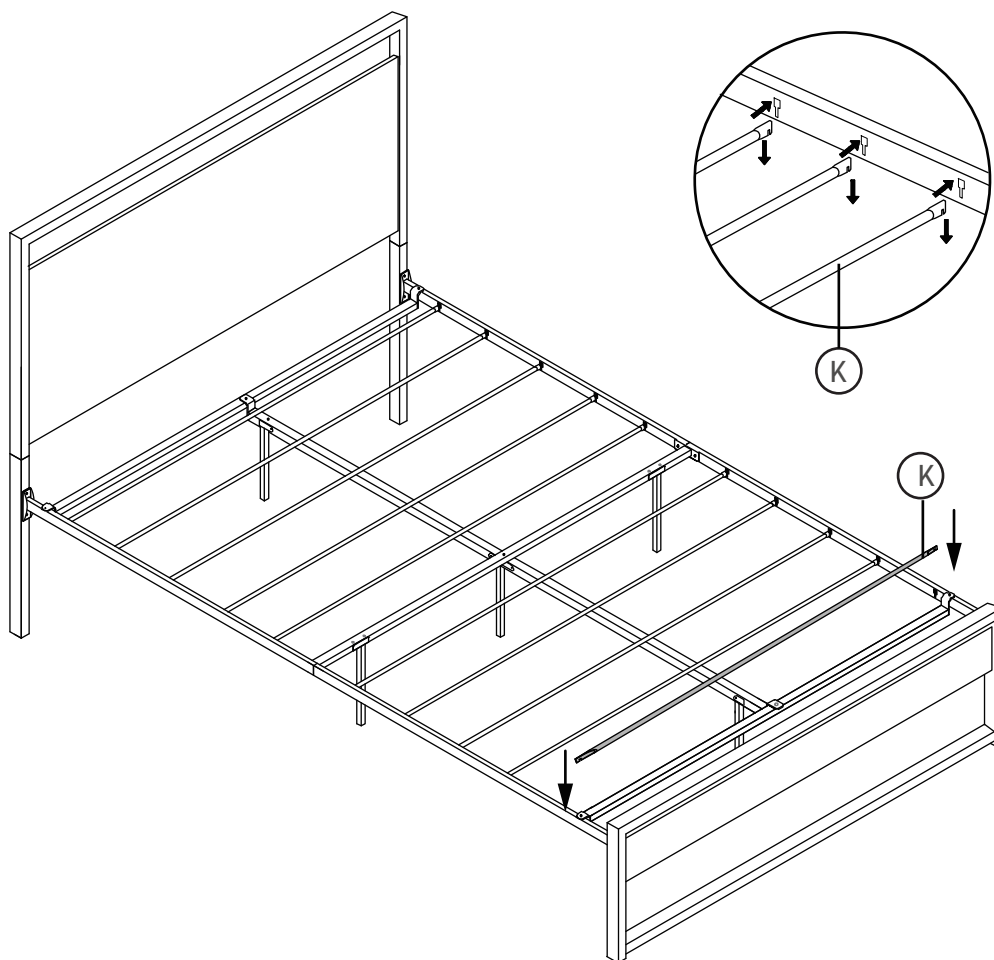


1. Insert slats into the hole on sidebar in the correct orientation.

2. Push the slats into the gaps.

11

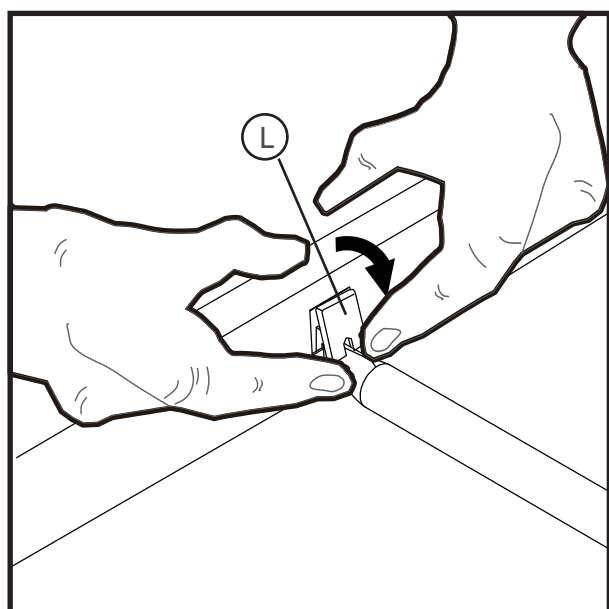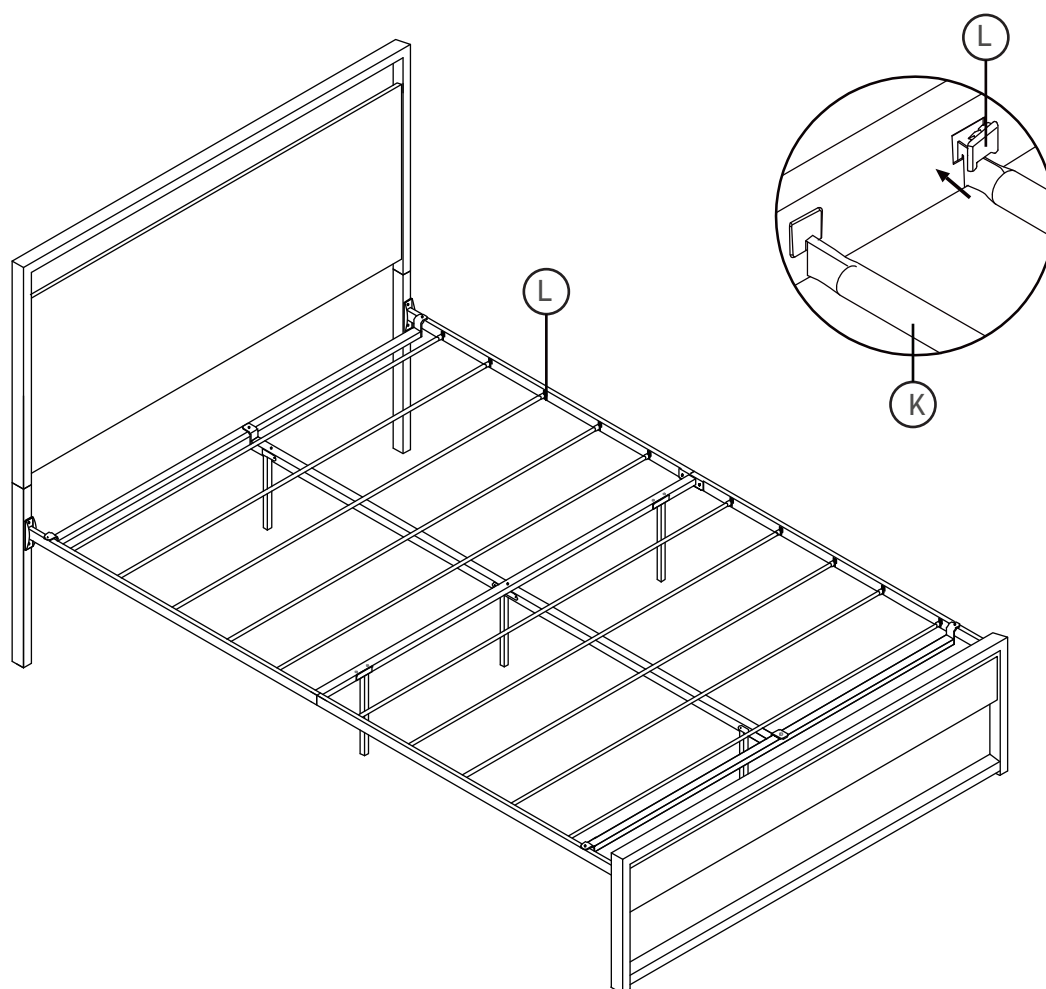

3.Put the plastic clamp(L)
into the lower part of hole
on 45degree.

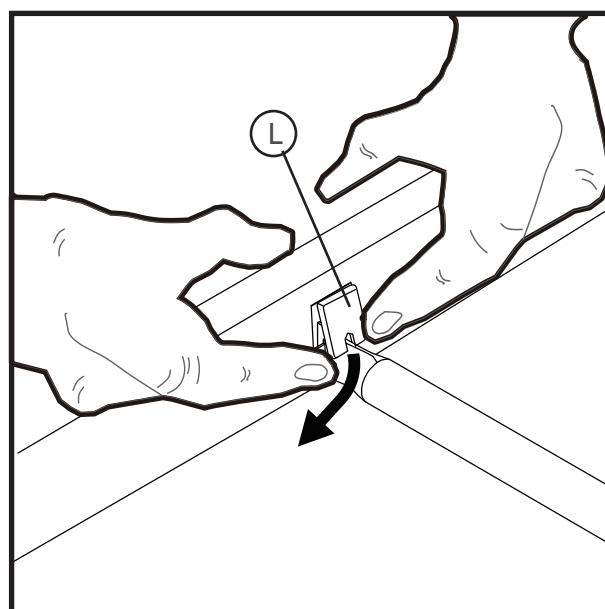

4.Press tight the upper
part of clamp to fix its
position.