

## IMPORTANT SAFETY INSTRUCTIONS

- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure the electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box.  
**Note: Some types of fuses must be unscrewed to shut the power off.**
- If you are unclear as to how to proceed, please consult a licensed electrician.


**UNPACK THE FIXTURE:** Check the contents of the box. Box should contain all items on the parts diagram.



**For any replacement parts or installation issues, please Contact Us!**

## INSTALLATION INSTRUCTIONS

1. Secure Mounting Plate (B) to existing junction box using Mounting Screws (A) provided. Use a leveling tool to ensure that Mounting Plate (B) is level. Mounting Plate (B) should be positioned with Backplate Screws (K) pointing away from the junction box.  
**Note: Mounting Plate (B) should be attached to the back of Backplate (G). Remove it.**
2. Using the pre-drilled holes on Mounting Plate (B), mark location to install Plastic Anchors (C). Remove Mounting Plate (B) and drill pilot holes on the marked spots and insert Plastic Anchors (C).  
**Note: Plastic Anchors (C) should sit flush with the wall.**
3. Re-secure Mounting Plate (B) to the junction box (not included) using Mounting Screws (A). Insert Wood Screws (D) through Mounting Plate (B) and fasten to Plastic Anchors (C).
4. Using the wire graph below, connect the appropriate wires from the fixture to the corresponding wires in the electrical junction box (not included) and secure Wire Connectors (C).

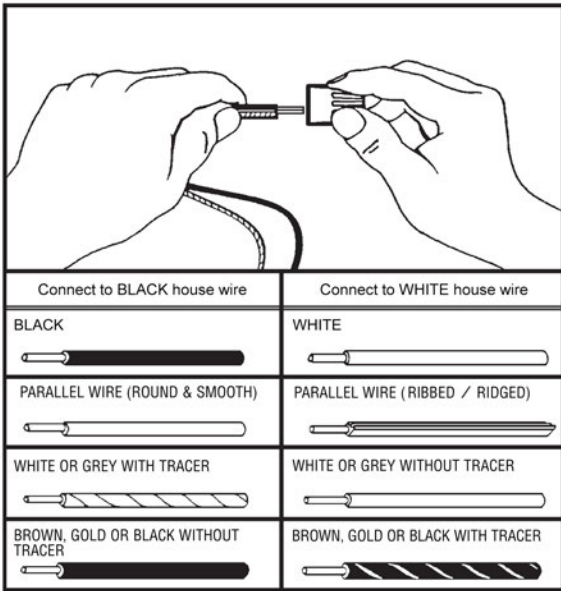

- A. Connect the ground wire (bare copper or green) from your fixture to the:
  - 1) ground wire in the junction box, or
  - 2) ground screw in the junction box
  
- B. Connect the BLACK house wire to fixture hot wire that corresponds to diagram (black, round & smooth, white/grey with tracer, brown/gold without tracer).
  
- C. Connect the WHITE house wire to fixture neutral wire that corresponds to diagram (white, ribbed/ridged, white/grey without tracer, brown/gold with tracer).

5. Place all wires and Wire Connectors (J) back into the junction box.
  
6. Place Backplate (G) against the wall, ensuring Backplate Screws (K) are protruding through the holes in Backplate (G). Secure the fixture in place to Mounting Plate (B) with Decorative Caps (H).
 

**Note: If the fixture does not sit flush against the wall, remove fixture and readjust Backplate Screws (K) and hex nuts.**
  
7. Secure Shades (F) to Sockets (I) with Socket Rings (E).
 

**Note: Socket Rings (E) should already be attached to Sockets (I). Remove Socket Rings (E) prior to installing Shades (F).**
  
8. Install light bulb (not included) into Socket (F).

Enjoy your new fixture!

**HELPFUL TOOLS:** Safety Goggles, Screwdriver, Ladder, Leveling Tool

