



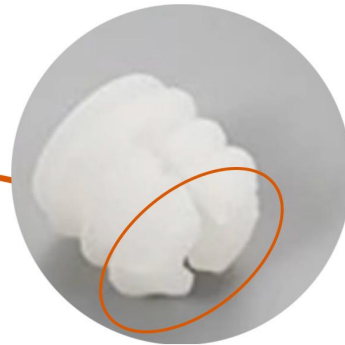

INSTALLATION INSTRUCTIONS


Installation Guide for 3-in-1 Connector Screws

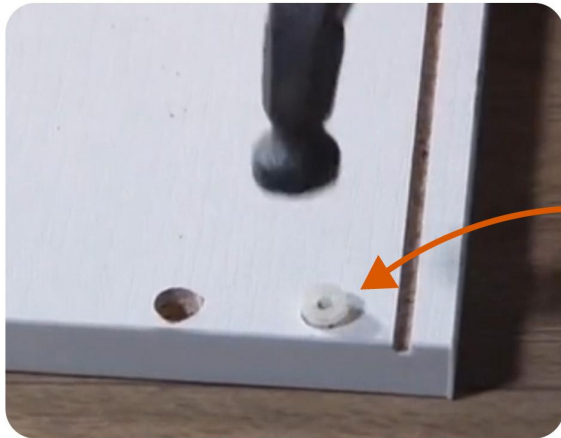

Insert Nut

Step 1

Tap the white insert nut (pointed end down) into the hole. Ensure it does not stick out of the panel.

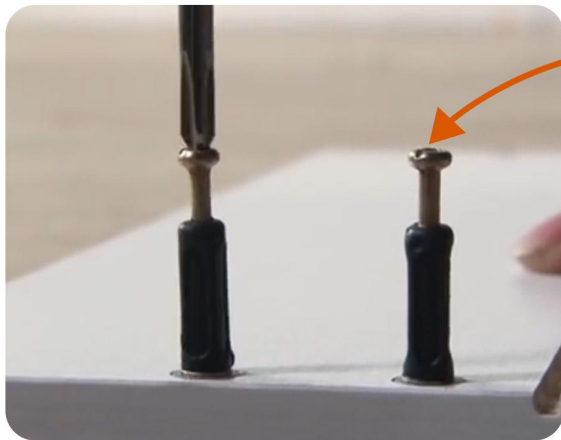

Connecting Bolt

Step 2

Tighten the connecting bolt into the insert nut until the bottom metal part is hidden.



Step 3

The connecting panel has two holes. Slide one hole onto the connecting bolt; the bolt head shall be visible from the other hole.



Cam

Step 4


Align the cam's recess towards the connecting bolt. Tighten with a Phillips screwdriver.

Hinge Installation and Adjustment Guide



Step 1

Install hinge on door panel: Set hinge in hinge cup. Use a wooden strip for alignment, then secure with screws.

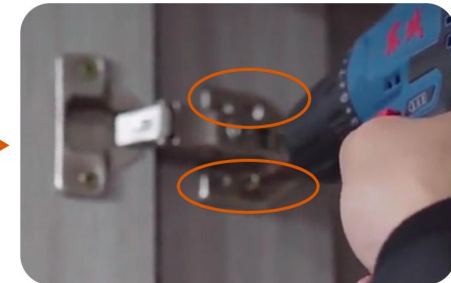

Step 2


Cabinet Door Installation: Check hinge front/rear screws are in the middle. Put door panel near cabinet, leave a gap. Set door opening angle to 100°–110°. Tighten screws at center of hinge top & bottom holes.




- 1** This screw is used to adjust the cabinet door.
- 2** This is used to adjust the gap between the cabinet door.



If the gap between the cabinet door is large, then adjust the **2** screw clockwise.

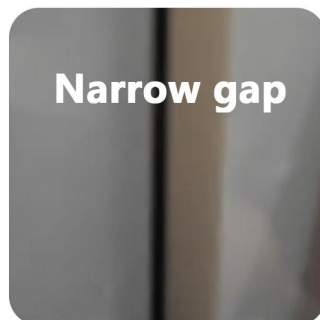

If the cabinet door won't close, adjust the **2** screw counterclockwise.

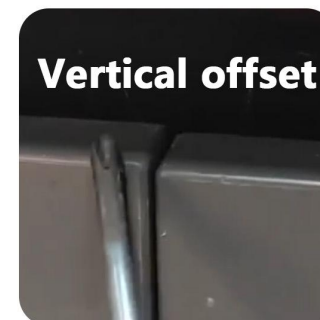

If the cabinet door has large vertical misalignment, adjust screw **1** first, then screw **2**