

EL970RICA

6" LED IC Airtight
Single Wall Remodel
Sloped Ceiling Housing


PROJECT INFORMATION:

Project Name: _____

Fixture Type: _____

Date: _____

DIMENSIONS

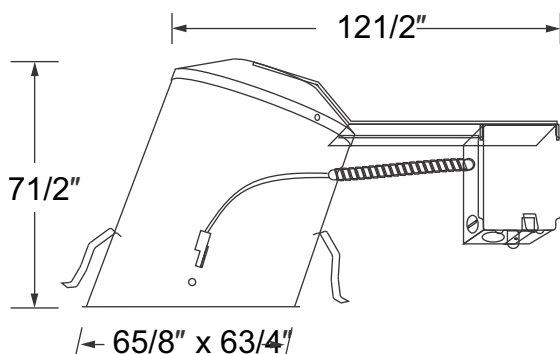

PRODUCT SPECIFICATIONS

- Single wall IC construction, for use in insulated ceilings.
- 7 1/2" height allows for use in 2 x 8 construction.
- Adjustable housing accommodates up to 1 1/4" ceiling thickness.
- For use in sloped ceiling with 2/12 to 6/12 pitch.
- Housing meets restricted air flow requirement (per ASTM E-283).
- CA Title 24 compliant (as low efficiency luminaire).
- Sloped ceiling LED inserts sold separately.

Lamp: 24W Max 120V

Lamp Holder: 2-wire quick connect terminal connector.

Labels: U.L. listed for damp locations
U.L. listed for feed through
U.L. listed for direct contact with insulation

INSTALLATION

Junction Box: Pre-wired junction box provided with 1/2" and 3/4" knockouts. Maximum (8) No. 12 AWG branch circuit conductors (4 in, 4 out). Junction box provided with removable access plates.

Mounting: (4) remodel clips secure housing and accommodate various ceiling thicknesses.

Mounting Frame: Stamped galvanized steel construction for corrosion resistance

CATALOG NUMBER

Example: EL970RICA

See trims page for variety of trims available

