
HOROW®

Installation & User Manual

HOROW F01R-S3319W1-LB

Workstation Farmhouse Kitchen Sink

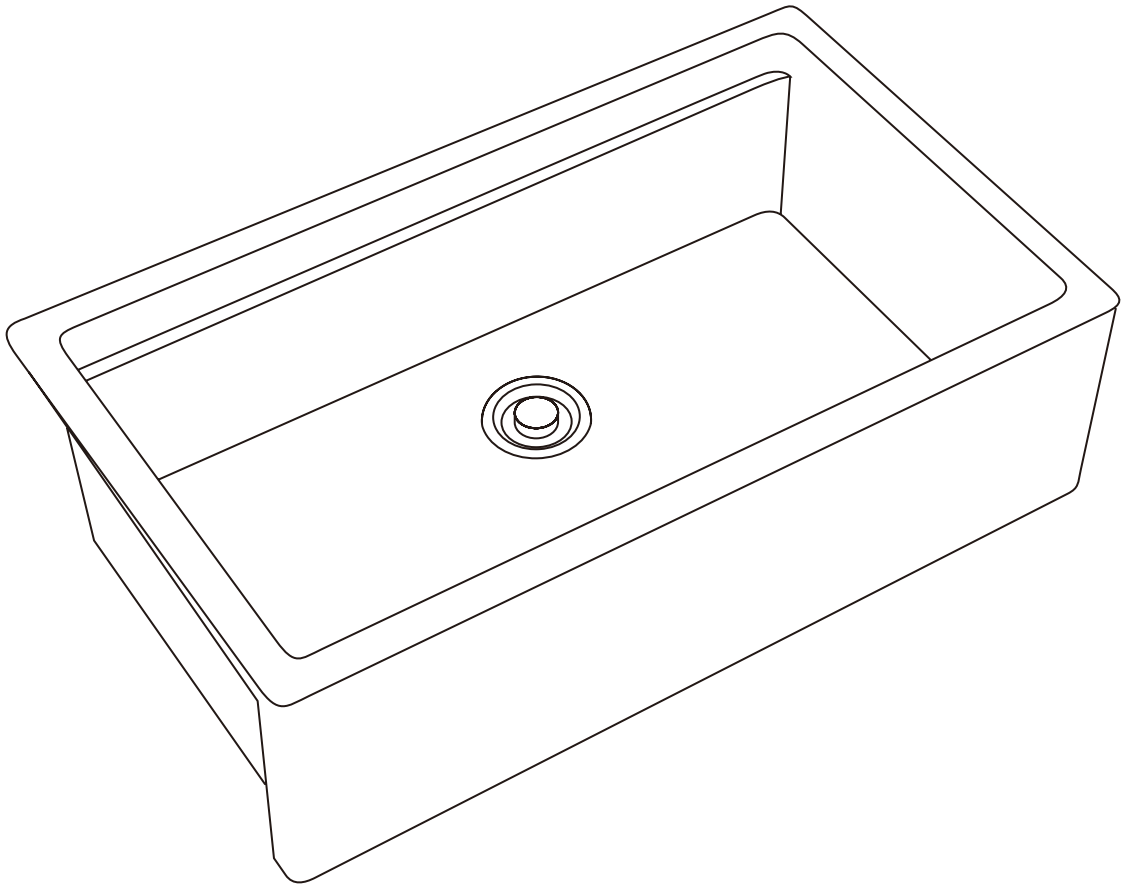

www.horow.com | (+1)209-200-8033 | support@horow.com

Contents

Important Information 1

Product Installation 2

Tools Needed for Installation 2

Parts Included 2

Prior to Installation 2

Installation of Sink 3

Care & Maintenance 6

Warranty 7

- Thank You for Choosing HOROW. Please read these instructions carefully before installation and keep this manual for future maintenance or reference.
- We are not responsible for the accidents resulting from the user's negligence.
- HOROW reserves the right to make revisions to this manual without notice.

Need help? Contact HOROW Customer Service Team.

Phone: (+1)209-200-8033 **Monday to Friday**
Email: support@horow.com

Important Information

1. Please keep the box and packaging materials until your product is completely installed.
2. If you have any questions, require technical assistance or have any problems with your product: please contact our Customer Service Team.
3. Please have the model number available and retain a copy of your purchase receipt for reference.
4. If for any reason this product does not meet your expectations, please repack this product in the original box and packaging material to avoid damage during transit.
5. Under no circumstances shall we be liable for any incidental damages sustained in connection with this product.
6. The step-by-step guidelines provided in this manual are intended as general guidance for installing HOROW products. In the event of any discrepancies, HOROW shall not be held liable.
7. Keep all small parts and packaging materials out of reach of children.
8. Dispose of packaging materials in accordance with local regulations.
9. Do not use this product for any purpose other than its intended use.
10. Product images shown in this manual are for reference only and may differ from the actual product.


Product Installation

Tools Needed for Installation


Please have these tools prepared prior to installation.


Safety Glasses



Drill



Sealant


Jig Saw


Screwdriver


Cut-resistant Gloves


Putty Knife


Tape Measure


Pencil



Scissors


Closed Toe Shoes


Note: Specialized tools may be necessary to install HOROW farmhouse kitchen sinks with countertop materials other than wood, marble, or granite.


Parts Included


Please confirm that all items below are inside the box.

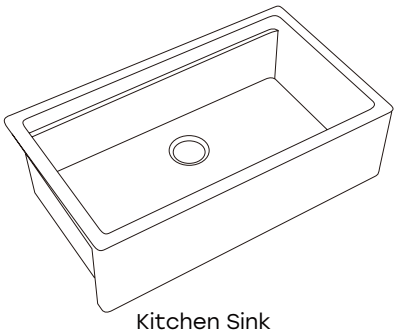
Kitchen Sink
Appearance is for reference only


Cutting Board


Bottom Grid

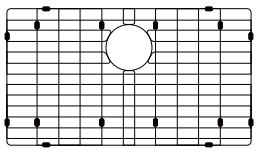
Roll-up Drying Rack


Basket Strainer

Prior to Installation

1. Caution: This product is fragile. Handle with care to avoid breakage and possible injury.
2. Make sure that you have all necessary parts. If any part is missing or damaged, please contact our Customer Service Team.
3. Inspect the sink prior to installation to make sure that it has not been damaged during shipping.
4. Follow all applicable state and local plumbing and building codes.
5. Read the installation and maintenance instructions carefully before installation. Always use appropriate tools and wear appropriate personal protective equipment during installation.
6. HOROW strongly recommends professional installation by a licensed plumber.
7. All dimensions are nominal. Verify actual product dimensions before installation.

Installation of Sink


Install your sink using the following steps:

1 Prepare and Cut the Cabinet

The farmhouse sink may require custom cabinetry. We recommend consulting an experienced cabinet maker for assistance. Providing the cabinet maker with the actual sink to be installed will help ensure a proper custom fit.

Measure the height and overall dimensions of the actual sink. When marking the front cutout on the base cabinet, add 1/16" (2 mm) to the measured sink height to ensure the top of the sink sits 1/16" below the top of the cabinet, leaving sufficient space for sealant application. Use jigsaw to cut.

Note: The base cabinet cutout width must match the actual width of the sink bowl, excluding the apron and rim.

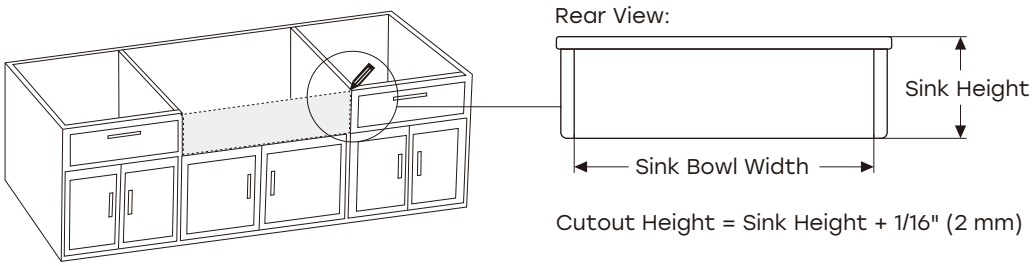


※ Ensure adequate clearance is provided for the backsplash, faucet, water supply lines, drain connections, and garbage disposal, if applicable.

2 Build Supports

Build wooden supports inside the cabinet based on the sink dimensions. The support structure must be strong enough to support the weight of the sink and all attached components.

Position the supports so that, when installed, the sink is level and flush with the top surface of the cabinet. Secure the support structure with construction adhesive and screws (not provided).

Note: Ensure the screws are long enough to fasten the supports securely, but short enough to prevent them from penetrating the inner walls of the adjacent cabinets.

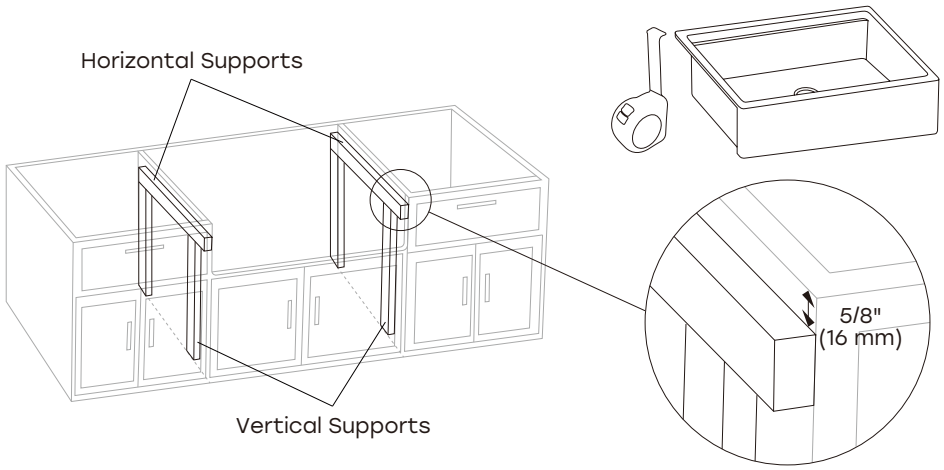


3 Install the Sink

Lower the sink into the cabinet opening and onto the support structure. Ensure the sink is fully supported.

Push the sink forward until the apron is flush with the front of the cabinet.

Verify that the sink is level from front to back and side to side.

Apply silicone sealant to fill any gaps.

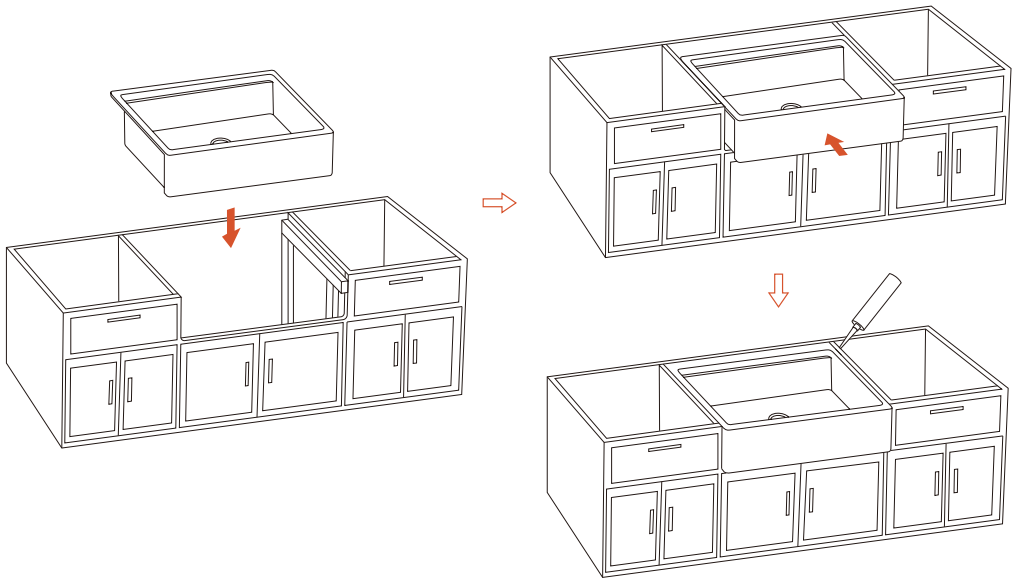


4 Install the Countertop

Apply a bead of silicone sealant around the rim of the sink. Check the alignment of the sink to the cutout in the countertop.

Place the countertop cutout hole over sink and press firmly.


Immediately remove any excess sealant.

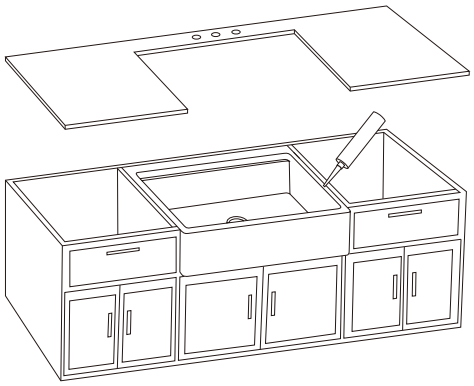

5 Install Plumbing Fixtures


Connect the basket strainer assembly to the sink. Connect the trap to the basket strainer assembly. Connect the water supply connections to the faucet according to manufacturer's instructions.

Run water into sink and check for leaks.

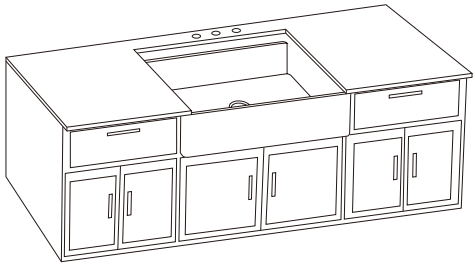

Install the basket strainer assembly as described below. It is easier to install the strainer assembly before mounting the sink to the cabinet.

1. Apply a small amount of sealant around the drain opening of the sink.
2. From above the sink, place the strainer ring (4) and strainer bowl (3) over the drain opening.
3. From underneath the sink, place the rubber washer (5) and large locknut (6) onto the strainer bowl (3).
4. Tighten the large locknut (6) to secure the strainer bowl (3) in place.
5. Insert the strainer basket (2) into the strainer bowl (3), then place the strainer cover (1) over the basket.
6. Connect the drain pipe to the bottom of the strainer assembly using the rubber washer (7) and small locknut (8).

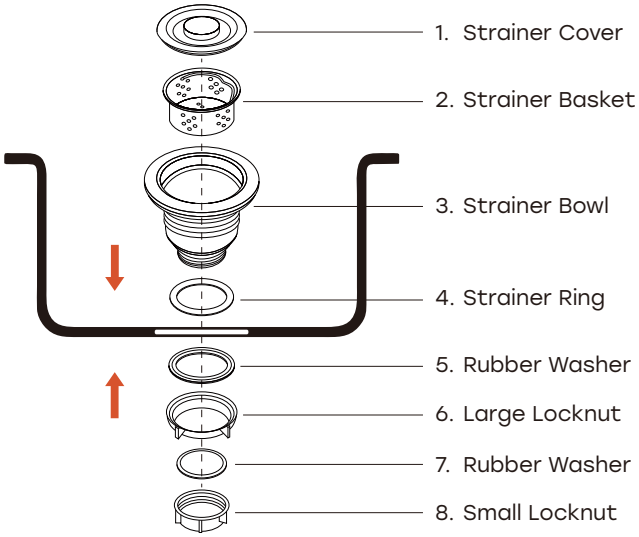


Basket Strainer Assembly Installation

Care & Maintenance

The kitchen sinks require regular cleaning and maintenance to prevent water spots, clouding and discoloration.

- ※ Clean your sink regularly with warm soapy water. Rinse thoroughly after using anycleaning products. Wipe the surface with a soft cloth to remove water spots and residue.
- ※ Do not cut food directly on the surface of the sink.
- ※ Do not leave sharp objects on the surface of the sink for an extended period of time.
- ※ Do not use abrasive cleaners, sanding tools, steel wool or bleaching products as use of such products may affect product performance or void the warranty.
- ※ Do not place hot pots, pans or utensils directly onto the sinks surface. Let them cool completely before placing them on the sink surface.

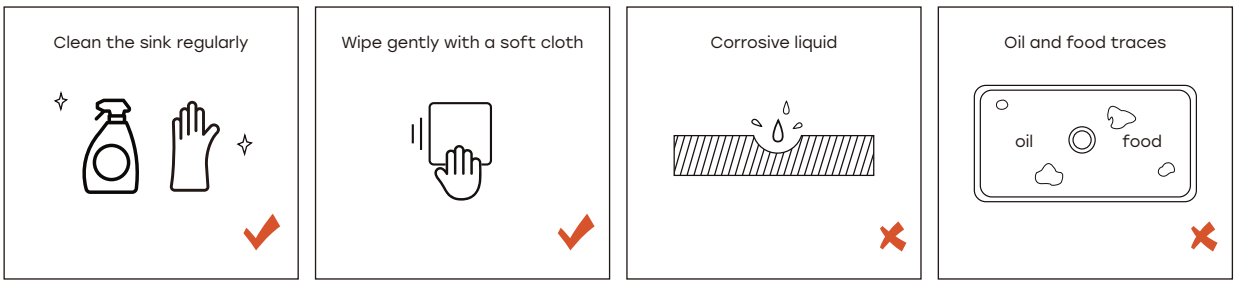

Warranty

ONE YEAR LIMITED WARRANTY

HOROW products are made with high-quality materials and workmanship to provide customers with products that are built to last. If any defects in material or workmanship are detected during normal use within the first year of purchase, such as the replacement of any product or product part that you consider to be defective, HOROW will provide replacement parts free of charge. We are **not responsible** for all damages that result from **improper installation resulting in unavailability**, **repair and maintenance**. This warranty applies only to the original purchaser. Proof of purchase and **evidence of damage** will be required in the case of a **claim**.

HOROW recommends the installations to be made by a licensed, professional plumber.

HOROW will not be held responsible for any damage or product failure due to improper installation, misuse, or failure to use a licensed professional. HOROW is not responsible for any removal or installation cost.

This One Year Limited Warranty will be voided if:
The product has been moved from its initial place of installation.
The product has been modified.
The product has been subjected to improper maintenance, abuse, misuse, excessive use of chemicals, accident or other damages.

HOROW makes no implication that products comply with any or all local building or plumbing codes. It is the consumer's responsibility to determine local code compliance. This warranty extends to the original purchaser and first consumer.

HOROW is not liable for any incidental, consequential or special damages associated with the return, replacement, installation or use of your product. This includes freight costs, labor, travel time, lost profit, home damages and other contingent liabilities and costs (including, without limitation, costs associated with experts, investigations, analyses, attorneys and other professionals and services).

The HOROW warranty is a comprehensive and explicit limit of liability, and all items outside of it are not addressable by or the responsibility of HOROW. Certain states have variances regarding implied warranties and in those situations, we remain fully compliant.

Warranty Registration

Proof of purchase is required to validate this limited warranty. HOROW encourages you to register your product upon purchase to create a record of ownership at www.horow.com. Registration is voluntary and not required to maintain your limited warranty rights.

For any questions or claims, please contact us by phone or email.

Phone: (+1)209-200-8033 **Monday to Friday**

Email: support@horow.com

When making a claim, please prepare a photo of the evidence of damage so that we can quickly resolve the claim for you.

Warning

Content may contain sharp and other possibly harmful pieces and may cause hazard to children and adults; HOROW is not responsible in any way for personal damage.