

BATH & VANITY FIXTURE

ASSEMBLY & INSTALLATION

INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. At the center of the BACK PLATE (2) there are eight perforated slots. Knock out the set matches your OUTLET BOX (1).

2. Screw the #8-32 FIXTURE MOUNTING SCREWS (14) into the BACK PLATE (2) and thread the #8-32 HEX NUTS (15) onto the FIXTURE MOUNTING SCREWS (14), as shown. Secure the position of the FIXTURE MOUNTING SCREWS (14) by tightening the HEX NUTS (15) against the BACK PLATE (2).

3. Carefully pass the OUTLET BOX (1) wires and the SUPPLY GROUND WIRE (6) through hole in the center of the BACK PLATE (2). Secure the BACK PLATE (2) to the OUTLET BOX (1) with MOUNTING SCREWS (3).


4. It is advisable to anchor the BACK PLATE (2) to the wall by using the set of holes at each end of the BACK PLATE (2) and the BACK ANCHOR SCREWS (4) or your own wood screws, toggle bolts, plastic anchors, etc. (Screws not provided on all models).

5. Attach the BLACK SUPPLY WIRE (9) to the SMOOTH (or BLACK) FIXTURE LEAD WIRE (10) by using the WIRE CONNECTOR (11). At the same manner, attach the WHITE SUPPLY WIRE (7) to the RIBBED (or WHITE) FIXTURE LEAD WIRE (8). Loop the FIXTURE GROUND WIRE (5) around the GROUND SCREW (12) of the BACK PLATE (2). (Note: Be sure to provide an extra 3" length of the FIXTURE GROUND WIRE (5) for connection to the SUPPLY GROUND WIRE (6).) Tighten the GROUND SCREW (12). Connect the remaining FIXTURE GROUND WIRE (5) to the SUPPLY GROUND WIRE (6) using a WIRE CONNECTOR (11) (not included). Place wiring and connections inside the OUTLET BOX (1).

ASSEMBLY AND INSTALLATION (Continued)

INSTALLATION IS NOW COMPLETED

6. Place the COVER PLATE (13) onto the FIXTURE MOUNTING SCREWS (14), and secure it into place using the DECORATIVE NUTS (16) provided.
7. Loosen the GLASS HOLDER SCREW (17) on the GLASS HOLDER (18). Then insert the GLASS SHADE (19) all the way into the GLASS HOLDER (18) and finger tighten the GLASS HOLDER SCREW (17) to hold the GLASS SHADE (19).
8. Screw light bulbs into the sockets and make sure they do not exceed the maximum wattage specified on the fixture's wattage rating label.

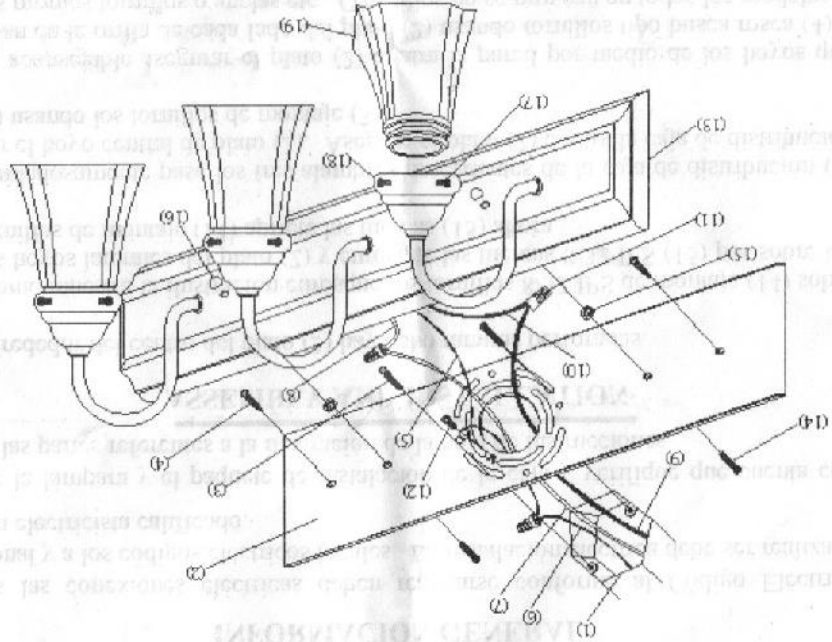

1. OUTLET BOX
2. BACK PLATE
3. MOUNTING SCREW
4. BACK ANCHOR SCREW
5. FIXTURE GROUND WIRE
6. SUPPLY GROUND WIRE
7. WHITE SUPPLY WIRE
8. RIBBED (OR WHITE) FIXTURE LEAD WIRE
9. BLACK SUPPLY WIRE
10. SMOOTH (OR BLACK) FIXTURE LEAD WIRE
11. WIRE CONNECTOR
12. GROUND SCREW
13. COVER PLATE
14. #8-32 FIXTURE MOUNTING SCREW
15. #8-32 HEX NUT
16. DECORATIVE NUT
17. GLASS HOLDER SCREW
18. GLASS HOLDER
19. GLASS SHADE