## **CHANDELIER**

## **CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

## **GENERAL PRODUCT INFORMATION:**


These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

All rights reserved.

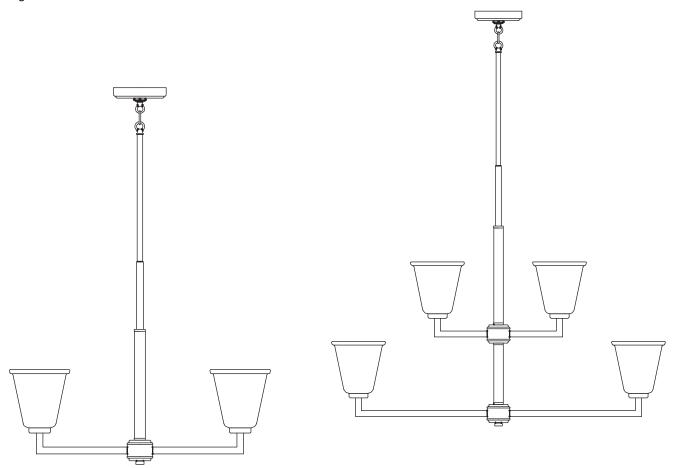

## Install the Fixture

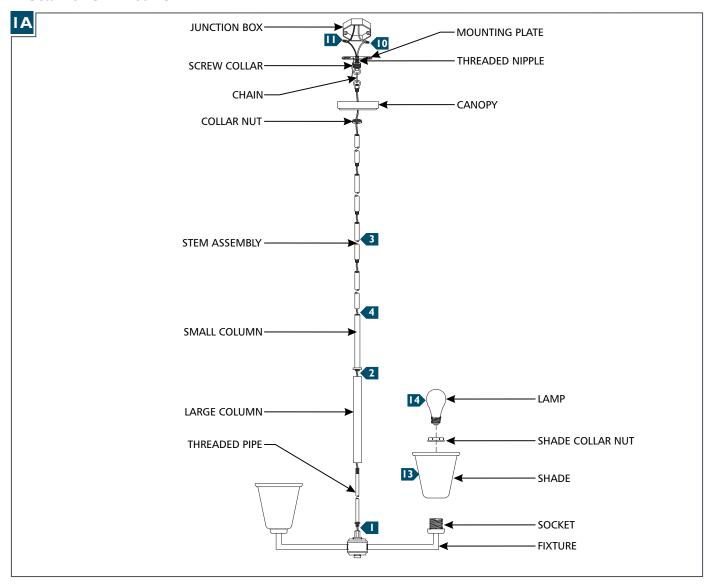

- Feed the fixture wires through the threaded pipe, then screw the pipe onto the fixture.
- Feed the fixture wires through the large and small columns, then slide them over the threaded pipe and secure them in place by screwing the small column onto the pipe.
- 3 Determine the wanted height or look of the fixture with the provided stems and chain, then assemble them by screwing them together.
- Feed the fixture wires through the stem/chain assembly, then screw the stem assembly onto the small column.
- If necessary, screw the threaded nipple tightly onto the mounting plate.
- 6 Install the collar nut and canopy onto the stem assembly.
- 7 Feed the fixture wires through the mounting plate/nipple assembly and screw the screw collar onto the threaded nipple.
- 8 Align and secure the mounting plate to the junction box.
- 9 Connect the fixture to a suitable ground in accordance to local electrical codes.
- Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
- Place the shade over the socket and secure it in place by screwing the shade collar nut onto the socket. Repeat for remaining shades.
- Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.