


Installation manual for:

W27" H8.4" E8" L3


Installation instructions:

1. Check all of the package contents before installation.
2. Place the shade (P7) over the socket (P6) and secure in place with the socket ring (P8)
3. Attach the mounting bracket (P1) to the outlet box using the screws (P4). Or fix mounting bracket (P1) on the wall directly using screw (P3)
4. Connect the wire with L marking from the fixture to the BLACK wire from the outlet box.
5. Connect the wire with N marking from the fixture to the WHITE wire from the outlet box.
6. Loop the grounding wire (E wire) from the fixture under the head of the green ground screw on the mounting bracket (P1) and connect it to the grounding conductor from the supply circuit.
7. Align the holes in the fixture with the mounting screws (P2) and secure it by screwing the ball nuts (P5).
8. Install the light bulbs (not included) into the sockets (P6).
9. Connect the power.

PARTS LIST

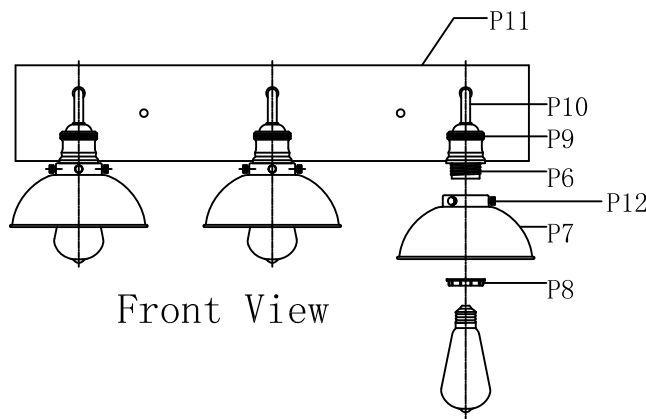

Front View

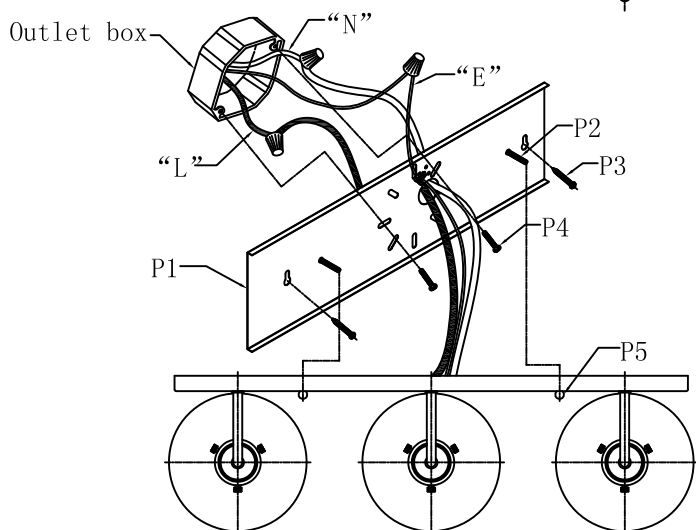

Top View

"L" = Hot wire
 "N" = Neutral wire
 "E" = Ground wire

| part | picture | Description | Qty | Check list |
|------|---------|---------------------------|-----|------------|
| P1 | | mounting bracket | 1 | |
| P2 | | 8/32" Screw | 2 | |
| P3 | | 8/32" Screw | 2 | |
| P4 | | 8/32" Screw L25mm | 2 | |
| P5 | | Ball Nut | 2 | |
| P6 | | E26 Socket | 3 | |
| P7 | | φ7.1*H3.4 Shade | 3 | |
| P8 | | socket ring | 3 | |
| P9 | | Cover | 3 | |
| P10 | | Arm | 3 | |
| P11 | | L26.4*W4.9*H0.8 Backplate | 1 | |
| P12 | | Finial | 9 | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |