

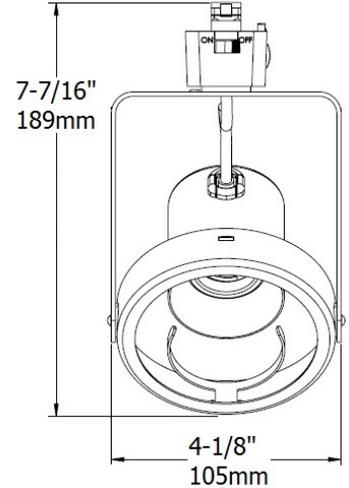


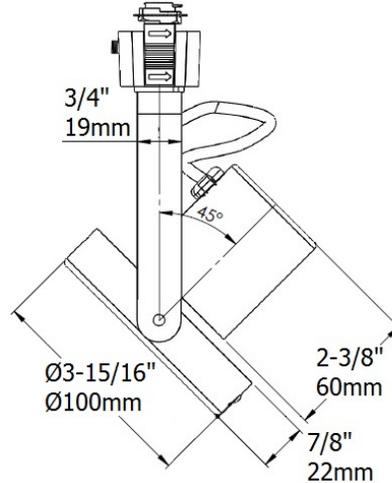

HV230

PAR30 GIMBAL TRACK LUMINAIRE

Type	
Project	
Catalog No.	

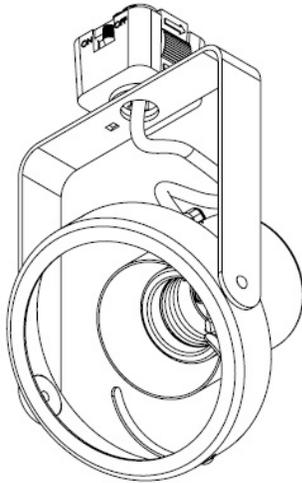

DESCRIPTION

PAR30 Halogen or LED track fixture in a minimal yet functional open gimbal ring design. Suitable for residential, retail or hospitality application.

CONSTRUCTION

Molded polycarbonate track fitting.
Spring loaded locking tab.
Steel yoke, gimbal ring and socket cover.
Powder coat paint.
350° horizontal, ±90° vertical aim adjustment.

MOUNTING

Selection of three track fittings. Provides electrical and mechanical connection to single or two circuit track systems.

ELECTRICAL

Porcelain socket, E26 medium base. Integral ON/OFF switch.

DIMMING

JESCO HV230 track luminaire is compatible with most dimming protocols prevalent in the United States. Please consult lamp manufacturer for latest compatibility information.

LAMPS

Halogen or LED PAR30, E26 medium base 120V 75W max. PAR30L lamp will have limited vertical aim.

LINE VOLTAGE FIXTURE EXTENSION

Suspend fixtures where needed without lowering the track.
Ordered separately.
BK, WT

For H1 or H2 Track

H2HVFE12	12" nominal, 14.5" overall
H2HVFE18	18" nominal, 20.5" overall
H2HVFE24	24" nominal, 26.5" overall
H2HVFE36	36" nominal, 38.5" overall
H2HVFE48	48" nominal, 50.5" overall

For J1 or J2 Track (on/off switch standard)

J2HVFE12	12" nominal, 14.5" overall
J2HVFE18	18" nominal, 20.5" overall
J2HVFE24	24" nominal, 26.5" overall
J2HVFE36	36" nominal, 38.5" overall
J2HVFE48	48" nominal, 50.5" overall

LABELS

cULus Listed

WARRANTY

18 months

ORDERING INFORMATION

SYSTEM	SERIES	FINISH
H2 = H1 or H2 Track L2 = L1 or L2 Track J2 = J1 or J2 Track	HV230	BK – Black WT – White
	HV230	



www.jescolighting.com
support@jescolighting.com
Tech Support: 855.592.0029

15 Harbor Park Drive
Port Washington, NY 11050
Main Line: 800.527.7796
Fax Line: 855.265.5768

219 South 6th Ave
City of Industry, CA 91746
Main Line: 855.654.0110
Fax Line: 626.333.2955

Specifications subject to change without notice.

8/31/2017

Page 1