

INSTALLATION INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Screw rod (I) to all thread (M) on fixture body, then screw rod (I) to all thread (N) on large shade (F). Pass the wires carefully through rod as you assemble.
4. Place large shade (F) on small shade (G) and secure with screws (E).
5. Thread screws (A) into pre-drilled holes on crossbar (B) spaced same distance apart as holes in canopy (D). The length of screws (A) may be adjusted, if necessary.
6. Attach crossbar (B) to junction box (not included) using mounting screws (C) (Size: #8-32N*L0.5"). The side of crossbar (B) marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

7. Connect the electrical wires as shown in fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to crossbar (B) using the green screw provided.
8. Tuck wire connectors neatly into the junction box.

FINISHING THE INSTALLATION (Fig.1)


9. Place canopy (D) over screws (A) and secure with knurled knobs (H).
10. Place candle covers (K) over sockets (L).
11. Install (5) five candelabra base bulbs (J) up to 60 watts each or CFL or LED equivalent (not included), in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

Set# A-010
-Crossbar
-Ground screw
-Mounting screws*2

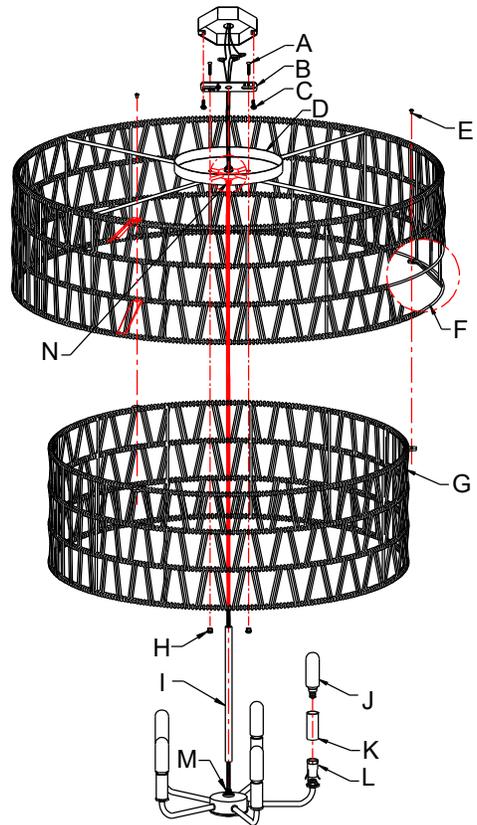

Candle cover#CCV21051P-695

Fig. 2

