


Assembly Instruction Sheet for Model HL529069

Package Contents

Part	Description	Quantity
A	Mounting Bracket	1 pc.
B	Lamp Support Plate	1 pc.
C	Fixture Arm	5 pcs.
D	Central Column	1 pc.
E	Chain	1 pc.
F	Canopy	1 pc.
G	Glass Shade	5 pcs.

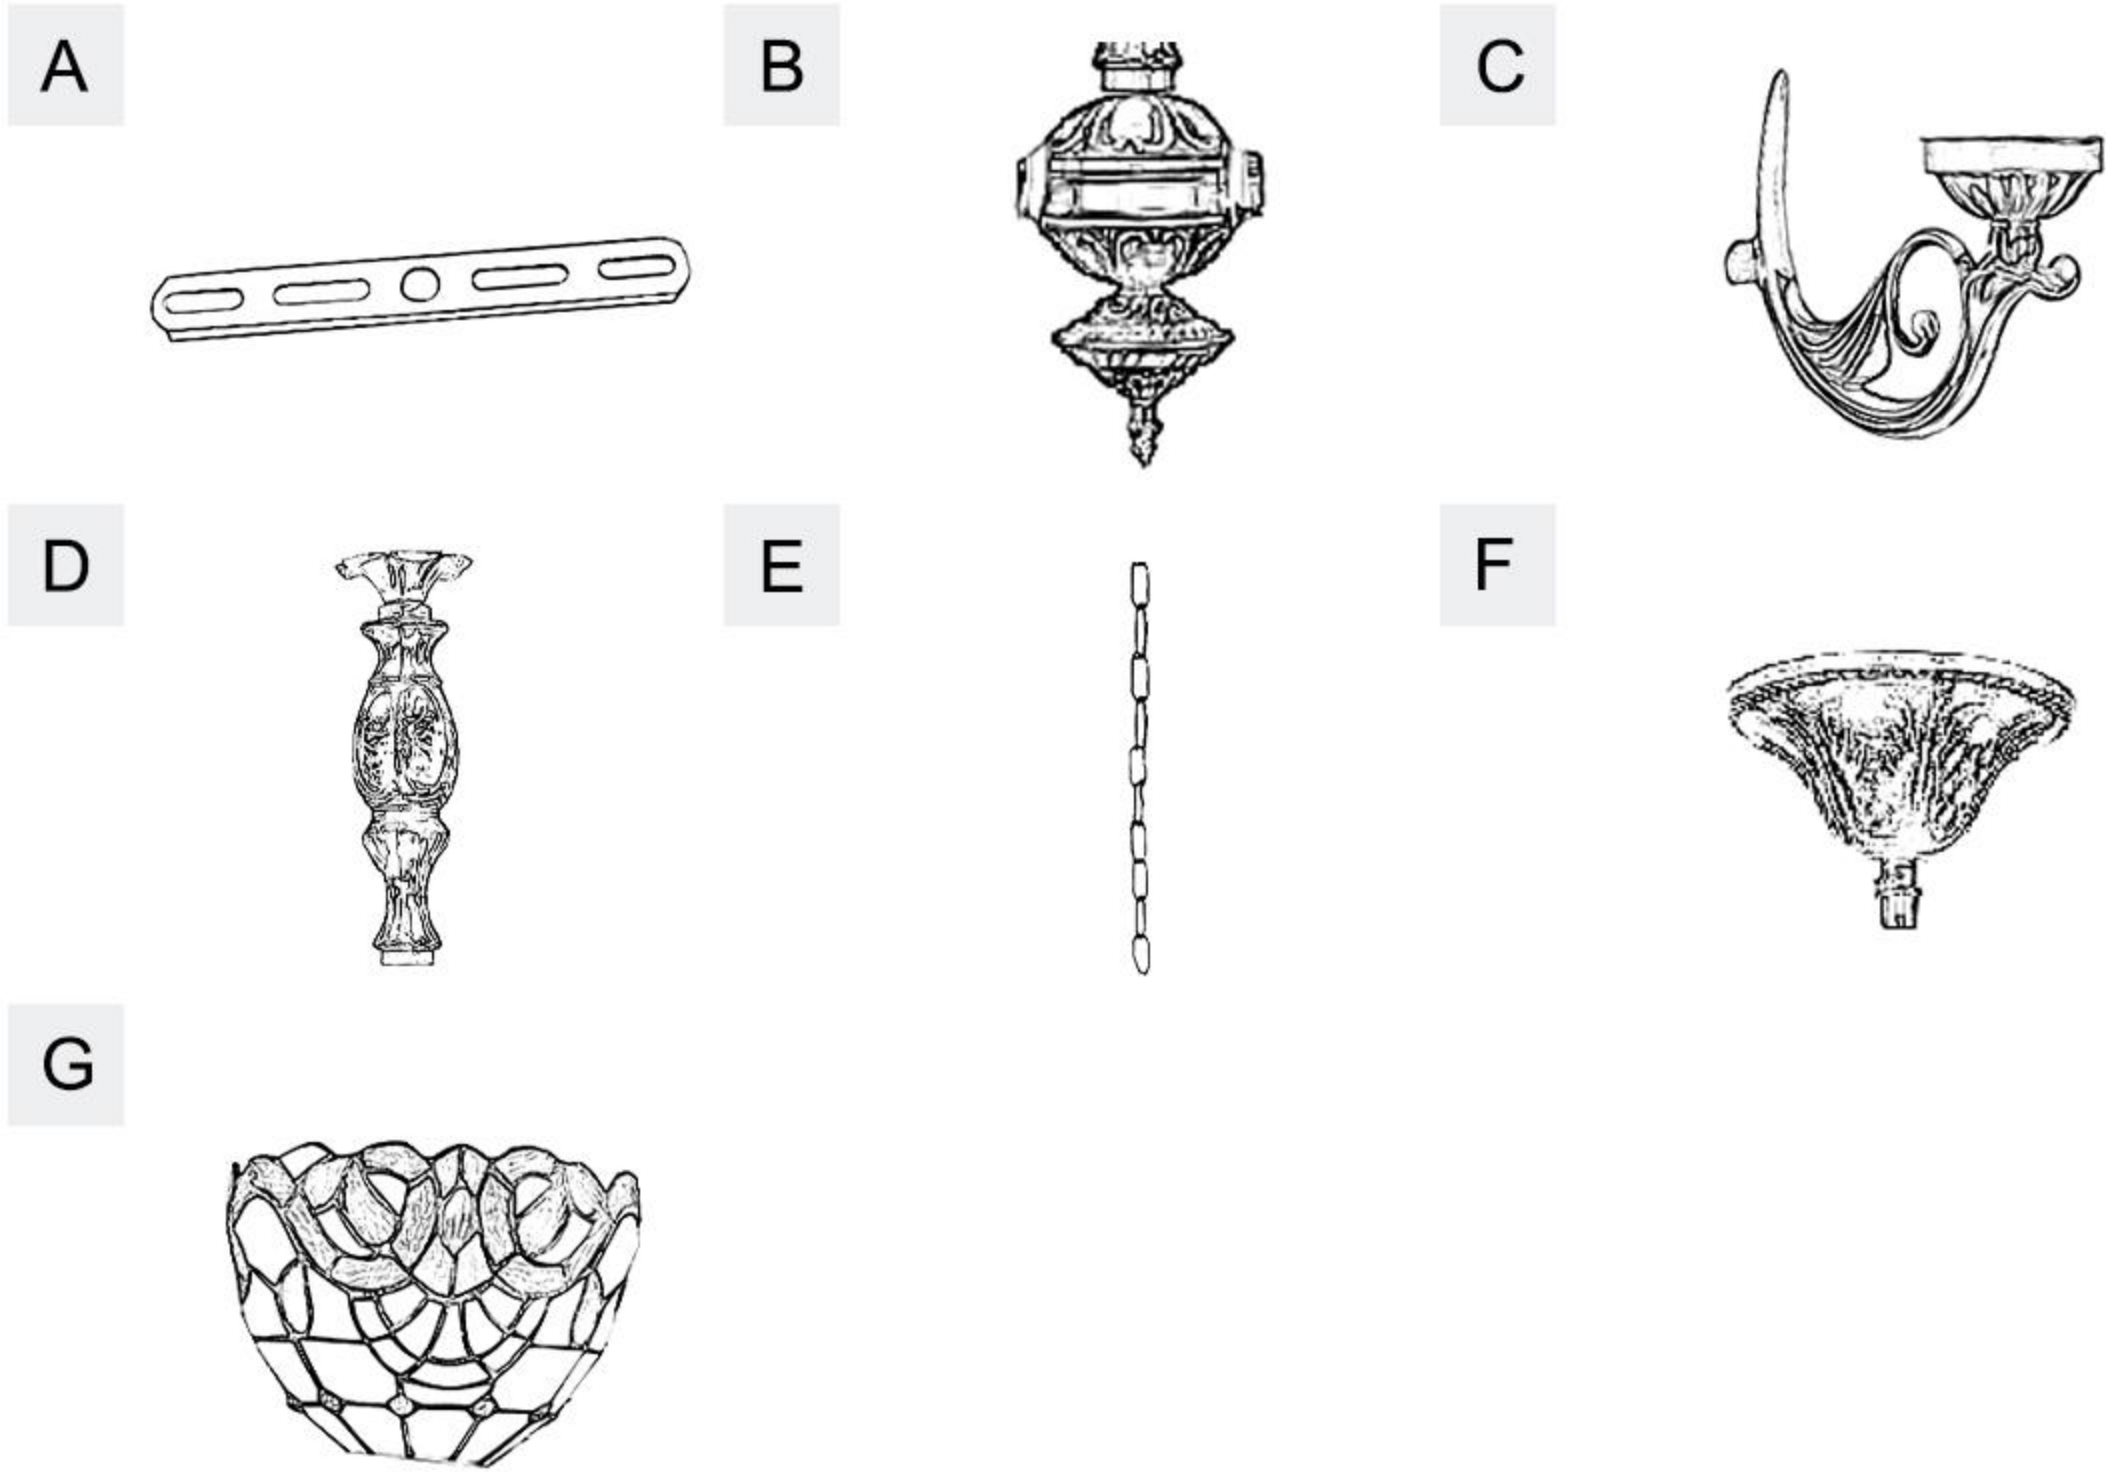

STEP 1

Mark the drilling position on ceiling with the help of the Mounting Bracket(A).
Drill holes on the marks and stick the expansion anchors into the holes.
Fix the Mounting Bracket(A) to the expansion anchors with self-tapping screws.

STEP 2

Remove the chassis of the Lamp Support Plate(B).
Thread the wire of Fixture Arm(C) to the side hole of the Lamp Support Plate(B),
and screw the Fixture Arm(C) to the Lamp Support Plate(B).
Repeat the above step to fix the other Fixture Arms(C).

STEP 3

Connect wires color Black/Red from the Lamp Support Plate(B) as one strand of wire.
Connect wires color White/Blue of Lamp Support Plate(B) as the other strand.
Fix the chassis back to the Lamp Support Plate(B).

STEP 4

Thread the wire of Lamp Support Plate(B) through the Central Column(D),
and fix the Central Column(D) to the Lamp Support Plate(B).

STEP 5

Thread the wire of Central Column(D) through the Chain(E), and fix the Chain(E) to the Central Column(D).

STEP 6

Thread wire from the Chain(E) to the hole of Canopy(F), and attach the Chain(E) to the Canopy(F).

STEP 7

Hold the fixture close to ceiling.
Connect live line to wire color Black/Red from the Canopy(F).
Connect neutral line to wire color White/Blue from the Canopy(F).

STEP 8

Attach the Canopy(F) to the Mounting Bracket(A).

STEP 9

Fix the Glass Shade(G) to the Fixture Arm(C) with the help of socket ring.

STEP 10

Install your bulb to the bulb base.

Your fixture is now assembled and ready to use.