

ASSEMBLY INSTRUCTION


ASSEMBLY TIPS:

1. Remove hardware from box and sort by size.
2. Please check to see that all hardware and parts are present prior to start of assembly.
3. Please follow attached instruction in the same sequence as numbered to assure fast & easy assembly.



Warning!


1. Don't attempt to repair or modify parts that are broken or defective. Please contact the store immediately.
2. This product is for home use only and not intended for commercial establishment.



ASSEMBLY TIME 5 MINUTES

PARTS IDENTIFICATION


A




SERVER

1 PC

STEP 1

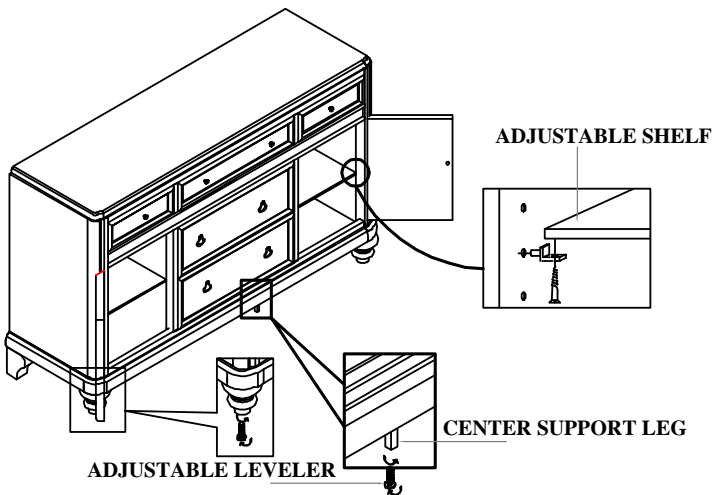


STEP 2 Complete

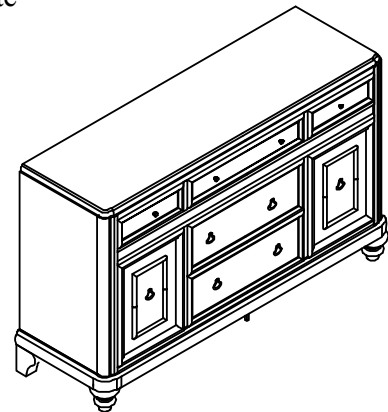






PARTS IDENTIFICATION

HARDWARE IDENTIFICATION

A **SERVER** **1 PC**



1		CABLE TIE	1 PC
2		PLASTIC BRACKET	2 PCS
3		SHORT SCREW	2 PCS
4		LONG SCREW	2 PCS
5		PLASTIC ANCHOR	1PC

- 1.1. Attach one of the mounting brackets securely to the back edge of the server. Use the short screw.
- 1.2. Determine where the server is to be placed and mark location on the wall for the mounting bracket screw hole approximately 2" below the bracket mounted to the edge of the server.
- 1.3. Drill a 3/16" hole in the wall. Press the plastic anchor into the hole and gently tap until the flange on the anchor is against the wall surface.
- 1.4. Position the bracket over the anchor and use the long screw to securely attach the brackets to the wall.
- 1.5. Place the server so the bracket on the back edge is in line with the bracket on the wall.
- 1.6. Place an end of the cable tie down through each bracket. Bring both ends together and slide the beaded end of the cable tie through the keyhole slot on the other end until snug. Pull down on the beaded end until it snap locks into the keyhole slot.
- 1.7. To double lock return the beaded end back through the keyhole as shown.
- 1.8. Check to make sure the cable tie securely laced and locked to brackets.

