


# Assembly Instructions

CM-AC6801BR

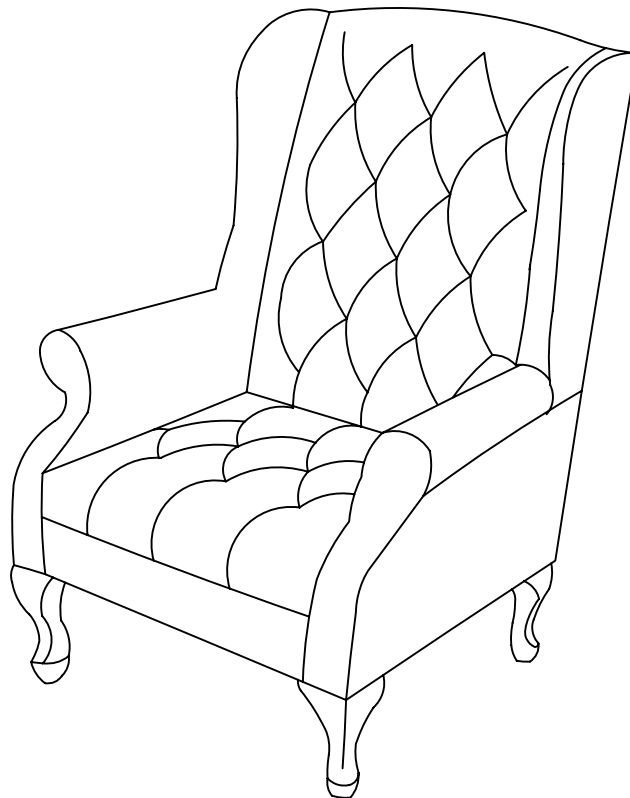


## ASSEMBLY RATING

The Assembly Rating is a 5-point system that shows the degree of effort needed in assembling a specific product (with 1 being easy and 5 being difficult). For some products, two persons are recommended.

EASY  DIFFICULT

## Tools Required for Assembly:

Allen Wrench



(Included)

Phillips Screwdriver




(Not Included)

# ASSEMBLY & CARE ADVICE

FOR YOUR FURNITURE TO LAST, CORRECT ASSEMBLY AND PROPER MAINTENANCE ARE NECESSARY. PLEASE FOLLOW THE INFORMATION PROVIDED BELOW TO FULLY ENJOY YOUR FURNITURE.


## BASIC ASSEMBLY TECHNIQUES

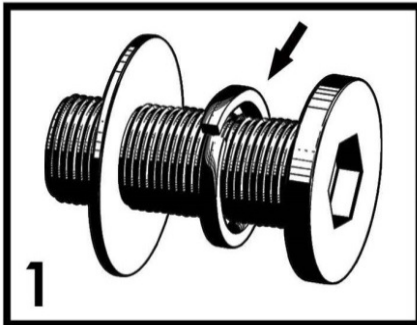


1 When lock or spring washer is used in an assembly, please make sure the lock or spring washer is placed between the larger flat washer and the head of the screw or bolt.




2 Position each part correctly and insert screws or bolts into their respective holes by hand tighten or using the proper hand tool. Only tighten when step is completed or when instructed to do so.

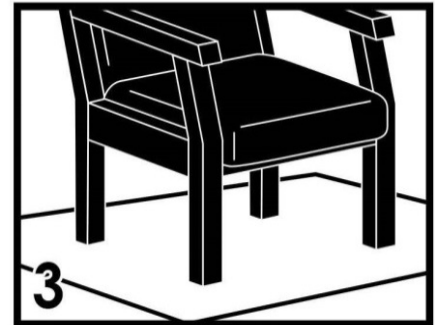


3 Use cardboard or carpet area when assembling furniture to prevent scratches. Make sure the furniture rests on a flat and level surface with each leg evenly touching the floor.

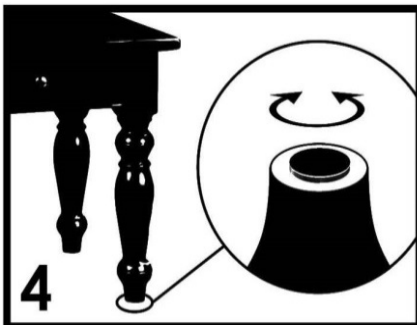

4 Some furniture comes with height adjustment knobs underneath each leg. To lower or to raise each leg, you need to turn clockwise or counterclockwise, respectively.

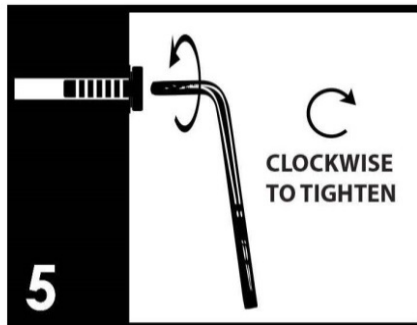

5 Make sure all parts are properly aligned, then use the appropriate hand tool to completely tighten the bolts or screws. Do not use power tools and do not overtighten.

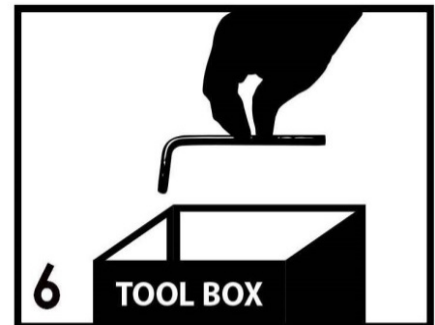


6 Save the instructions and store the Allen wrench or any supplied tool for later maintenance. After two weeks, check and tighten any loose hardware and repeat again every six months thereafter.

IT IS THE USER'S RESPONSIBILITY TO MAINTAIN THE FURNITURE. THE HARDWARE MAY LOOSEN OVER TIME AND MAY CAUSE THE FURNITURE TO BE WOBBLY AND UNABLE TO SUPPORT ITS INTENDED WEIGHT CAPACITY. THIS MAY LEAD TO COLLAPSE AND MAY CAUSE SERIOUS INJURY.



FAILURE TO FOLLOW THE GUIDELINES ABOVE MAY RESULT IN INJURY AND/OR PROPERTY DAMAGE.

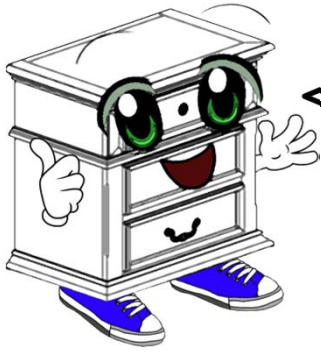






Before you begin, please read Page 2 of "Assembly and Care Advice".






And remember, do not tighten until each step is completed or instructed.

MD

### Parts List


- |   |                            |
|---|----------------------------|
|    | #1 x 1 pc<br>Backrest      |
|    | #2 x 1 pc<br>Chair Seat    |
|   | #3 x 1 pc<br>Right Armrest |
|  | #4 x 1 pc<br>Left Armrest  |
|  | #5 x 4 pcs<br>Leg          |

### Hardware List

- |  |                            |
|--|----------------------------|
|    | #A x 15 pcs<br>Bolt        |
|    | #B x 15 pcs<br>Flat Washer |
|  | #C x 15 pcs<br>Lock Washer |
|  | #D x 1 pc<br>Allen Wrench  |
|  | #E x 8 pcs<br>Screw        |



- I. Place the backrest (#1) facing down on a protected surface.
- II. Align the right armrest (#3) with the pre-drilled holes of the backrest (#1).
- III. Prepare 3 bolt assemblies by inserting FIRST the lock washer (#C) onto the bolt (#A) and then the flat washer (#B) onto the SAME bolt (#A), in that order.
- IV. Insert the bolt assemblies through the pre-drilled holes of the backrest (#1) and secure those bolts using the Allen wrench (#D) to lock them in with the right armrest (#3).

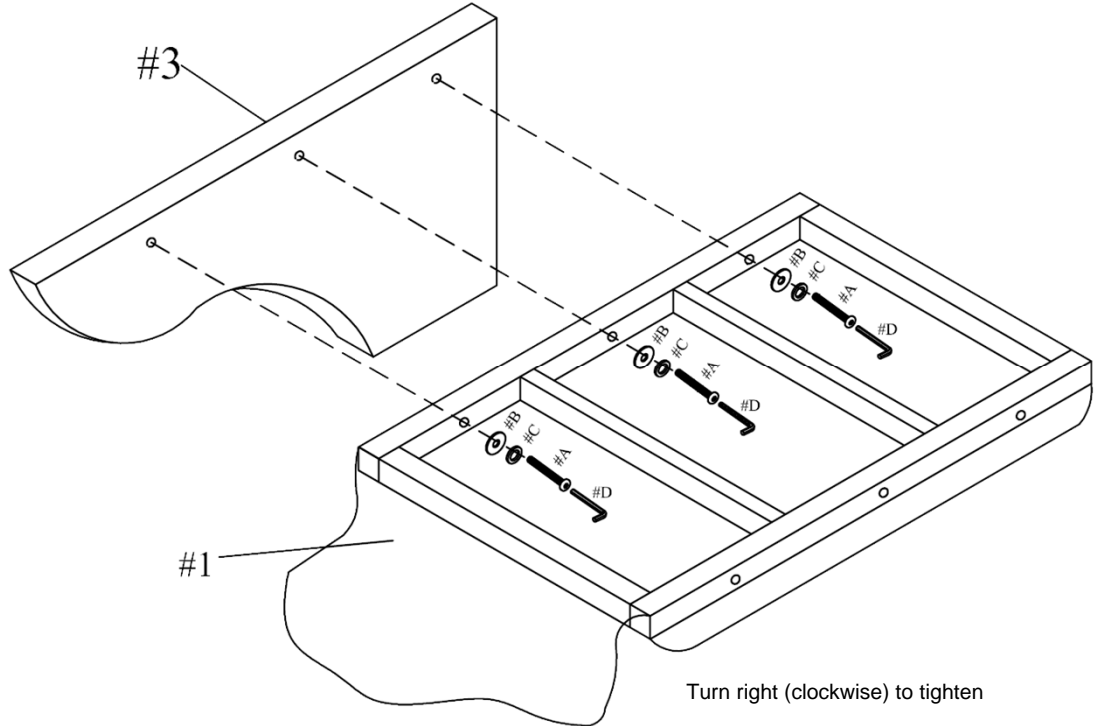


#A x 3 pcs  
#B x 3 pcs  
#C x 3 pcs

Note: Right and left are determined by standing BEHIND the chair.

Turn right (clockwise) to tighten



Repeat Step 1 to assemble the left armrest (#4) onto the backrest (#1).

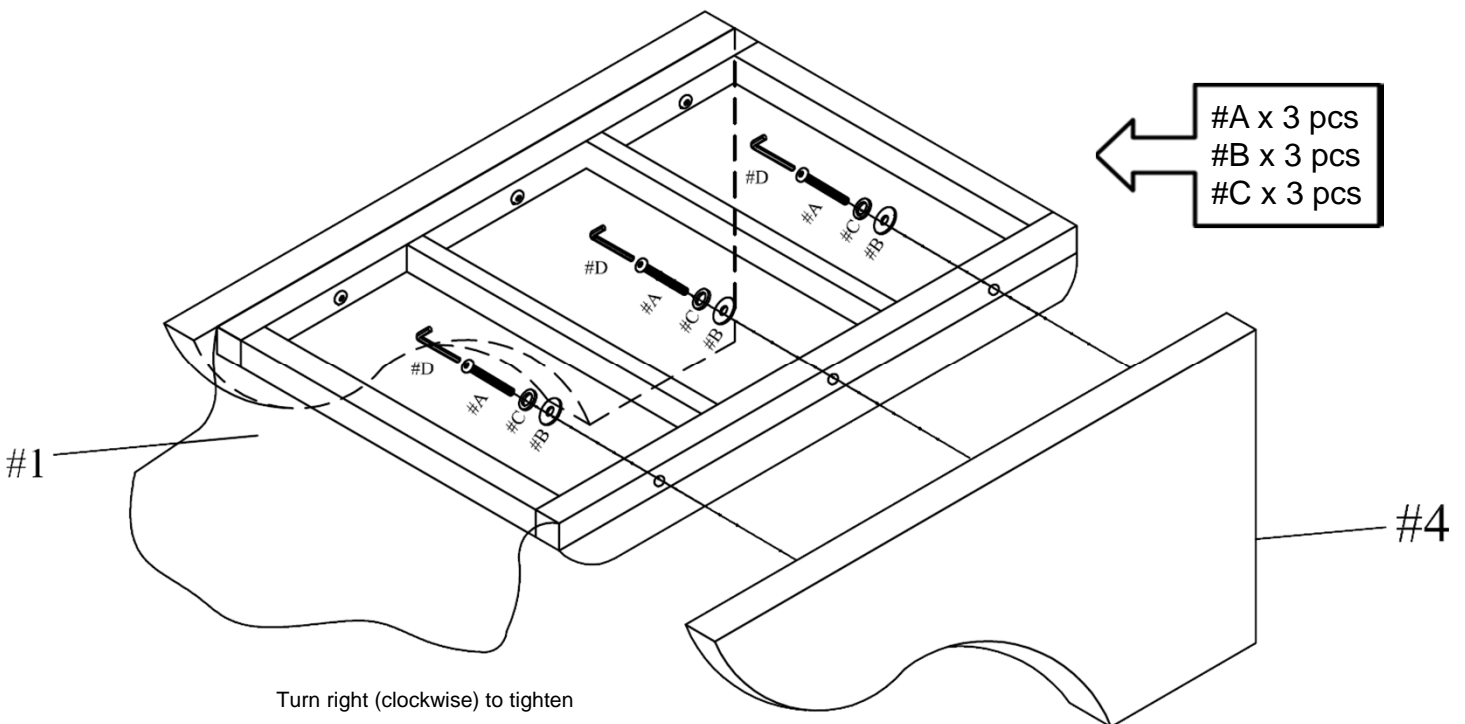


#A x 3 pcs  
#B x 3 pcs  
#C x 3 pcs

Turn right (clockwise) to tighten



#3

#A x 9 pcs  
#B x 9 pcs  
#C x 9 pcs

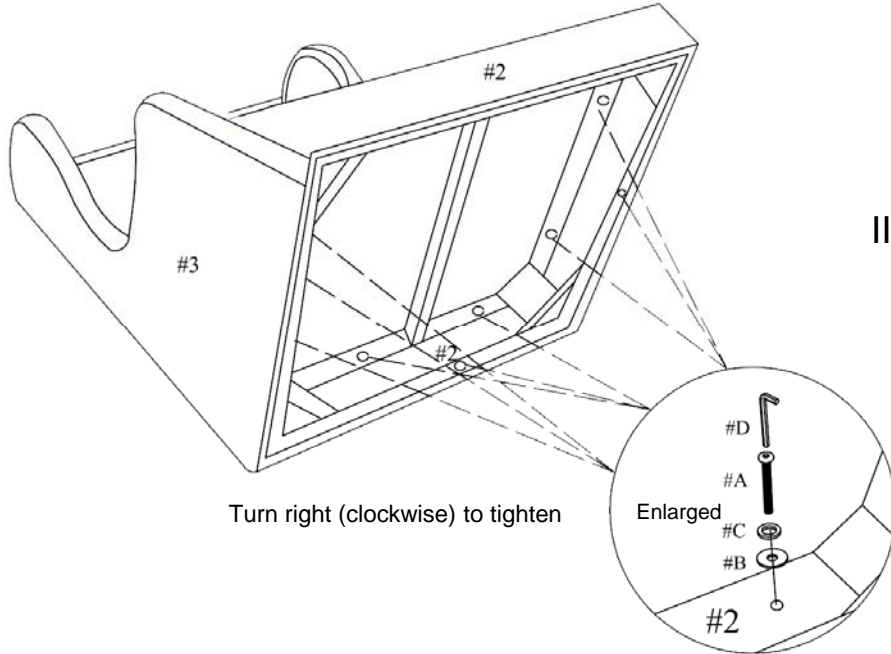


Turn right (clockwise) to tighten

- I. Align the chair seat (#2) with the pre-drilled holes of the backrest (#1), the right armrest (#3) and left armrest (#4).
- II. Prepare 9 bolt assemblies by inserting FIRST the lock washer (#C) onto the bolt (#A) and then the flat washer (#B) onto the SAME bolt (#A), in that order.
- III. Insert the 6 bolt assemblies through the inside of the chair seat (#2) AND 3 bolt assemblies through the bottom of the chair seat (#2) using the Allen wrench (#D) to lock them in with the backrest (#1), the right armrest (#3) and left armrest (#4).



#4

- I. Align the legs (#5) with the pre-drilled holes on the bottom of the chair seat (#2).
- II. Insert a screw (#E) through the pre-drilled hole of each leg (#5) and using the Phillips screwdriver to lock it in with the chair seat (#2).

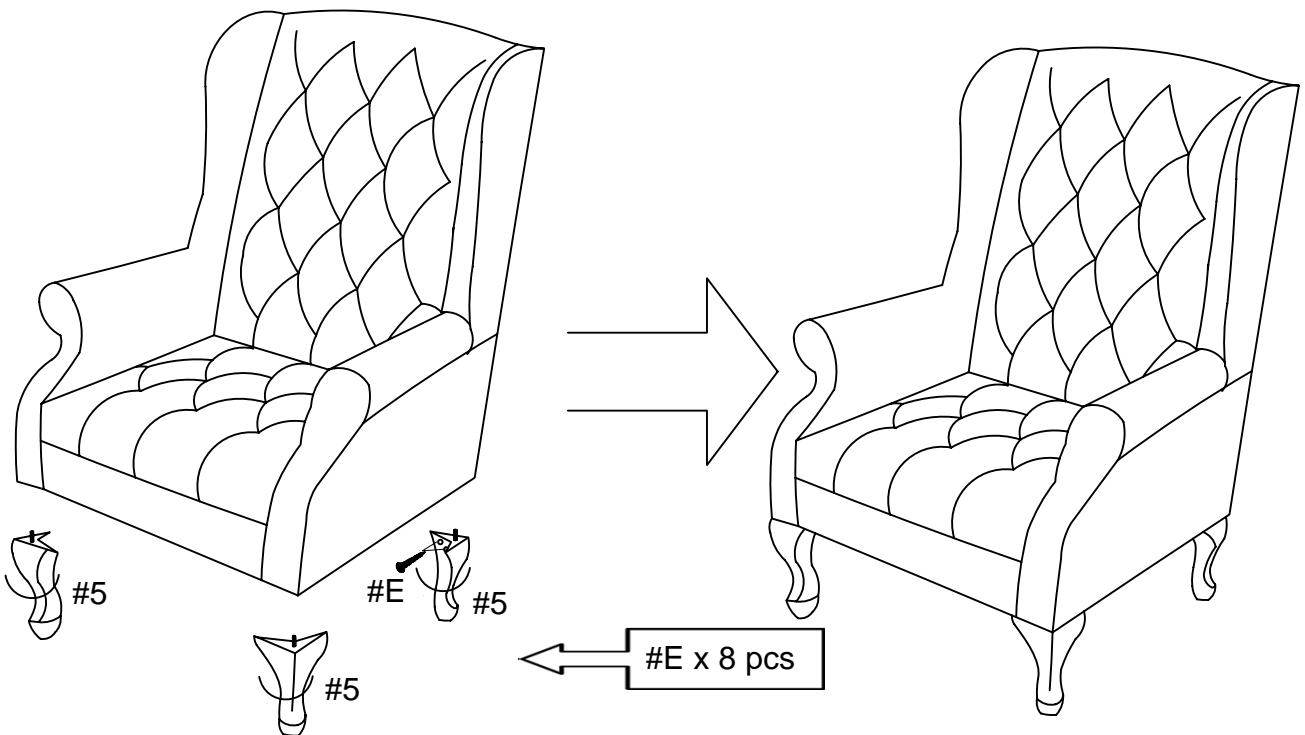

#E x 8 pcs

ASSEMBLY IS COMPLETED