

IMPORTANT SAFETY INSTRUCTIONS


- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure the electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box.
Note: Some types of fuses must be unscrewed to shut the power off.
- If you are unclear as to how to proceed, please consult a licensed electrician.

UNPACK THE FIXTURE: Check the contents of the box. Box should contain all items on the parts diagram.

INSTALLATION INSTRUCTIONS

1. Measure Canopy (D) height with measuring tape. Adjust Canopy Screws (E) on Mounting Plate (A) to the height of measured Canopy (D) plus 1/4" to allow them to protrude through Canopy (D) during installation. Lock Canopy Screws (E) in place with the hex nuts.
2. Secure Mounting Plate (A) to the junction box (not included) using Mounting Screws (B) provided. Ensure Mounting Plate (A) is positioned with the threads of Canopy Screws (E) pointing down towards the floor.
3. Place Canopy (D) flush against the ceiling with Canopy Screws (E) protruding through the holes in Canopy (D). Verify that 1/4" of the threaded portion of Canopy Screws (E) are visible. Remove Canopy (D) and set it aside.
Note: If 1/4" of Canopy Screws (E) are not visible, remove Canopy (D) and re-adjust Canopy Screws (E) to proper height and lock them in place with the hex nuts.
4. Lower Socket (I) into Shade (K).
5. Remove Ball Knobs (M) and Ball Screws (N) from Brackets (L). Place Brackets (L) around the indentation on each side of Shade (K) by aligning the holes on each end of Bracket (L) with holes at the end of each Arm (J).
6. Insert Ball Screws (N) through holes on Brackets (L) and Arms (J).
7. Thread and tighten Ball Knobs (M) onto the end of Ball Screws (N) to secure Brackets (L).
Note: Bending the tabs on each Bracket (L) to sit parallel with Arms (J) allows for easier assembly. Use pliers and a towel to avoid damaging the fixture.

8. Adjust Wire (H) to desired hanging length by loosening the side screw on Wire Grip (G). Retighten side screw when desired height has been achieved.
9. Remove any excess Wire (H), leaving approximately 10 inches beyond desired hanging length.
10. Using the wire graph below, connect the appropriate wires from the fixture to the corresponding wires in the electrical junction box (not included) and secure Wire Connectors (C).

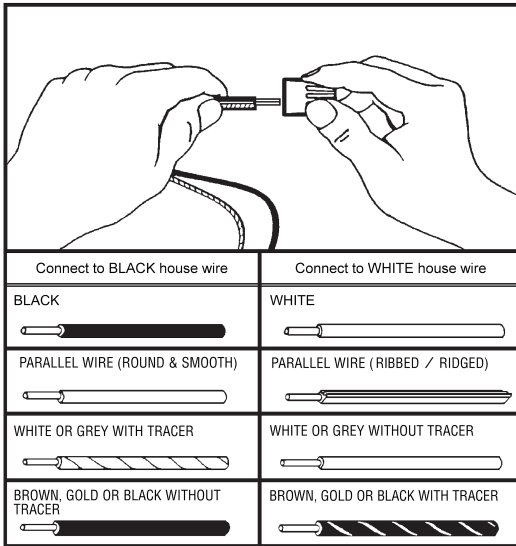

- A. Connect the ground wire (bare copper or green) from your fixture to the:
 - 1) ground wire in the junction box, or
 - 2) ground screw in the junction box
- B. Connect the BLACK house wire to fixture hot wire that corresponds to diagram (black, round & smooth, white/grey with tracer, brown/gold without tracer).
- C. Connect the WHITE house wire to fixture neutral wire that corresponds to diagram (white, ribbed/ridged, white/grey without tracer, brown/gold with tracer).

11. Place all wires and Wire Connectors (C) back into the junction box.
12. Place Canopy (D) against the ceiling, ensuring Canopy Screws (E) are protruding through the holes in Canopy (D). Secure Canopy (D) and the fixture in place with Decorative Caps (F).
13. Install light bulb (not included) into Socket (I).

Enjoy your new fixture!

HELPFUL TOOLS: Safety Goggles, Screwdriver, Ladder, Measuring Tape

