

DREAMSIDEA

INSTRUCTION MANUAL



NO:12171




DREAMSIDEA

Tel.+1-562-510-9089


E-mail:support@dreamsidea.com

<https://www.dreamsidea.com>


EXPLODED VIEW

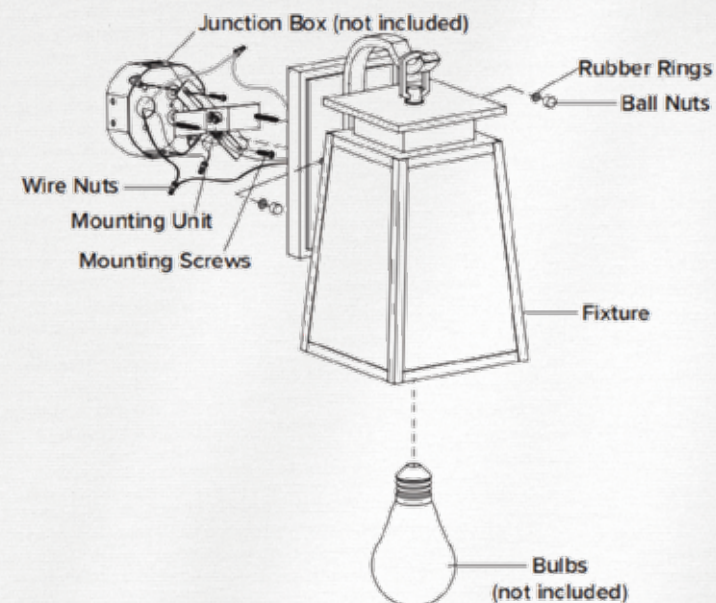

PARTS



Fixture



Mounting unit



Rubber rings



Ball nuts



Mounting screws



Wire nuts

TOOLS REQUIRED




Ladder



Safety glasses



Electrical tap



Phillips screwdriver



Flat blade screwdriver




Pliers



Wire strippers

STEP 1

Unscrew the rubber rings and ball nuts from the mounting unit. Use the mounting screws to attach the mounting unit to the junction box (not included).

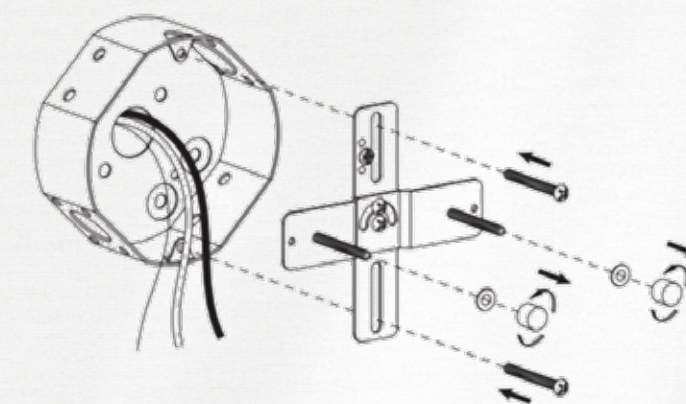

ATTENTION

Please inspect the wires before installation, if the wires show any cut or abrasion, or has exposed copper wires,

DO NOT use the fixture, it might be caused during transportation or defect product.


Before starting installation of the fixture, please remove the previous fixture (if any). Disconnect the power by turning off the electric break for your property (Please ask for professional help if needed).

MAINTENANCE AND WARNING

- Verify the lamp model suits the environment (indoor/outdoor, IP rating) and check all accessories (body, screws, cord, manual).
- Only use with bulbs of the recommended type and wattage. Exceeding the maximum wattage may cause overheating or fire.
- Do not install the fixture if any part is damaged or missing.
- The fixture may become hot during use. Allow to cool before handling.
- Clean dust accumulation in recessed lamps regularly (to prevent overheating), but only when powered off; never rinse with water.
- If the fixture includes a dimmer switch, ensure it is compatible with the fixture before installation.
- Do not modify the fixture in any way; tampering with electrical components can result in malfunction or risk of fire.


STEP 2

Make the electrical connection from the junction (not included) box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Next, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape.

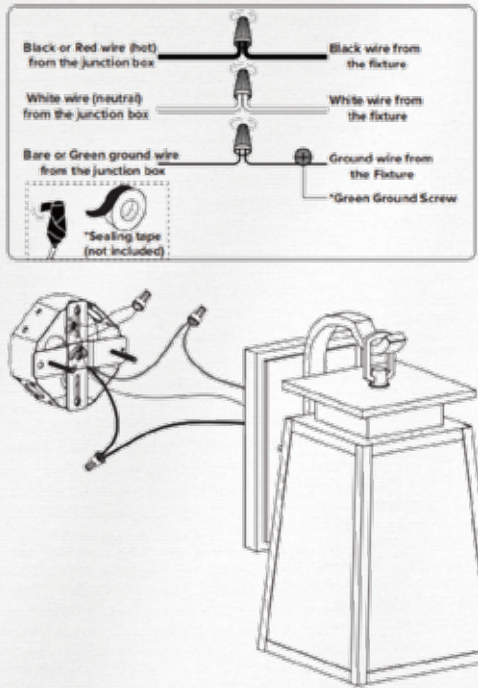

STEP 3

Attach the fixture to the mounting unit through screw holes as show,and secure it with rubber rings and ball nuts.

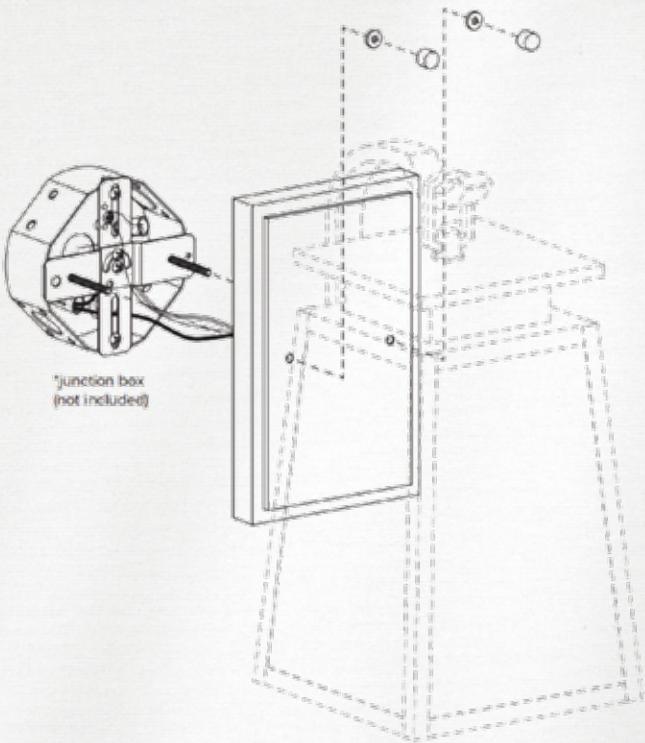

STEP 4

Install bulb (not included)

