

Smart Toilet Instructions

■ Safety Note

Please be sure to read this manual carefully before installation, and strictly follow the instructions for installation. After reading, please put the manual in a conspicuous place and keep it properly.
For the safety of you and others, to avoid unnecessary harm and loss, please strictly follow the following tips to use this product correctly.

WARNING Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.


CAUTION Indicates a potentially hazardous situation which, if not avoided, could result in minor or moderate injury or in damage to product o

Explanation of terms and symbols

Symbol	Description
	This symbol indicates the described action is prohibited.
	This symbol indicates that the described action must be performed.
Warning	
	Do not remove, repair or modify the product by yourself as this may cause electric shock or fire. Do not put lighted cigarettes or other burning materials into the toilet, as this may cause a fire. Do not pour water or detergent on the product body or the power plug as this may cause electric shock or fire. Do not plug or unplug the power plug with wet hands as this may cause electric shock. Do not use power extension cords or loose and unstable power outlet, otherwise it may cause electric shock or fire. If the power cord is damaged, please disconnect the power immediately, and contact the manufacturer's maintenance department or a professional in a similar department to replace it, and it is forbidden to replace it by yourself.
	This is an electrical product, so do not place it in a place where it is susceptible to water or high humidity. Please make sure that the product's power outlet must be 110V~60Hz. Ensure that the outlet and power cord can comply with the 16A current, otherwise it may cause the product to malfunction or be damaged. The grounding wire of this product must comply with the specified construction method and the tertiary grounding structure must be grounded, otherwise the use of this product is prohibited. Installation should be done using the new hose assembly supplied with the appliance and other parts specified with it; old hose assemblies should not be reused or they may cause leaks. When installing, removing, repairing and maintaining the product, you must unplug the power supply and turn off the water supply valve. If the room temperature is lower than 0°C, it is recommended to release the water in the product to prevent the product from freezing inside. When used by people (including children) who have a lack of physical perception and intellectual ability or a lack of experience and common sense, this product needs to be used under the supervision of a person, and should be used with caution by people with heart disease. Do not let children play with this product.
	During thunderstorms, pull out the power plug. It is strictly forbidden to step on the body and toilet lid. Do not use banana oil, gasoline, medicines, detergents or insecticides to wipe this product. If you sit on the smart toilet for a long time, please adjust the seat temperature to a low level. When the product is energized but not supplied with water, please do not turn the product upside down, as this will cause failure of the heating tube. Please make sure the water source used is clean. Do not use industrial water, waste water, sea water, reclaimed water and other sewage. Do not let the sun shine directly on the product to avoid burns caused by product discoloration and unstable temperature. Do not lean back on the toilet lid when using the product to avoid damage to the product. Do not press the toilet seat and lid too hard to avoid damage to the descender.

■ List

Name of part

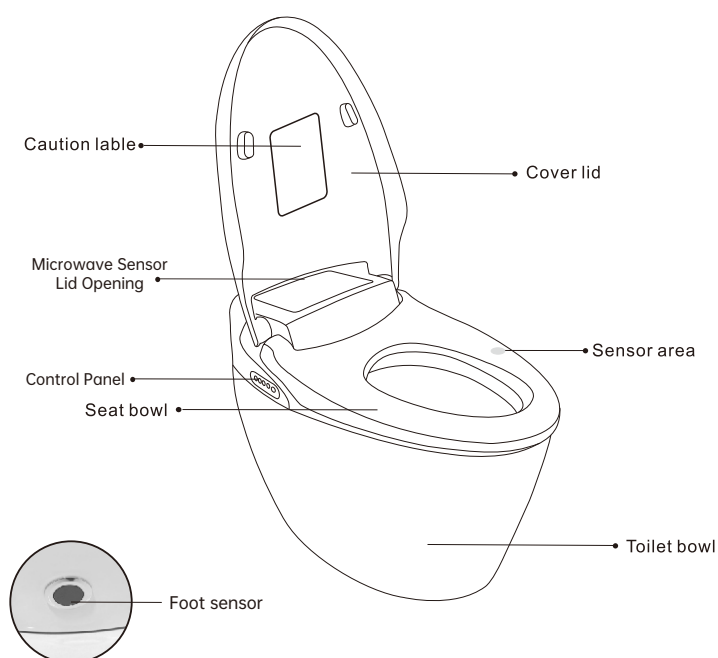


Warning

Anti-low temperature burn

- Please make sure to turn off the seat temperature and the warm air drying to avoid low-temperature burns when used by the following people and situations.
 - Children, the elderly and other people who cannot adjust the temperature by themselves;
 - Sick people, disabled people and other people with disabilities;
 - People who have taken hypnotics (Hypnotic, cold medicines, etc.), excessive drinking, fatigue or sleepiness.

■ Knob Operation and Indicators

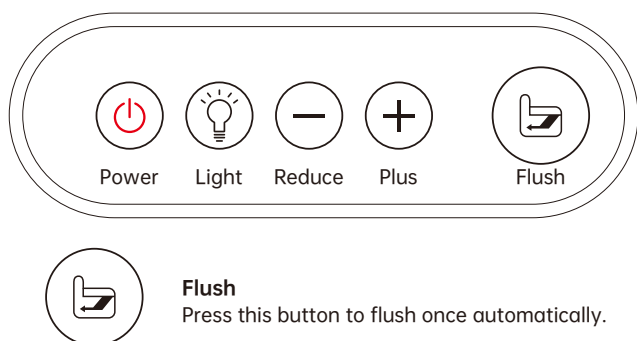

Power

Press this button to turn the power on/off.



Light

Press this button to turn the night light on/off.



Reduce

The seat temperature can be adjusted in four levels. Press this button to decrease the seat temperature by one level.



Plus

The seat temperature can be adjusted in four levels. Press this button to increase the seat temperature by one level.

■ Advanced Features (Only for models with this feature)

Foot Sensor Flushing

When the user leaves the seat, the toilet will automatically flush once when a foot reaches the sensing area.

Foot feel flip/loop

When leaving the seat, when the foot reaches the sensing area, the seat cover/seat ring will automatically open. If no other operation is performed after opening the seat cover/ring, the cover/ring will automatically close after 2 minutes.

Microwave induction flip

When the human body reaches the sensing area, the seat cover automatically opens. If no other operation is performed after opening the seat cover, it will automatically close after 2 minutes.

■ Specification

Name		Smart Toilet
Voltage		AC110V 60Hz
Rated power		45W
Inlet Water Pressure		0.15-0.75 MPa
Seat Temp	Surface Temp	4 Grades (home temp~40℃)
	Heating Power	45W
	Safety Equipment	Temp controller & Temp fuse
	Open And Close Device	Seat ring and flip lid with damping cushioning device
	Safety Equipment	Leakage protector,The cover temperature sensor

- Installation of smart toilet

CAUTION

- The plug should be close to product for easy installation and dismantling.
- The plug and product should stay away from bathtub.
- Suggest to use the water proof plug and do not use the portable plug.
- Install and use the product in correct way or else you will get electric shock or causes fire.

Cross Screwdriver Slotted Screwdriver Adjustable Spanner Knife

1. Please mark the center line of the drain outlet on the ground, then according to the size of the toilet, install the water inlet angle valve on the suitable point of the wall.

Seal ring

Diagram illustrating the rear of the unit showing the mounting bracket assembly. Labels indicate the components: Nuts, Gasket, and Plastic screw washer.

Diagram illustrating the application of transparent glue to the toilet base. A tube of glue is shown applying adhesive to the bottom of the toilet bowl. Labels include 'Toilet' and 'Transparent glue'.

- The fittings are tested well before EXW. Do not dismantle them yourself.
- Do not replace the fittings and hose we supply.
- The manual base on the last product. We reserve the right to adjust the contents without further notice.

[illegible]