


## Installation Steps:

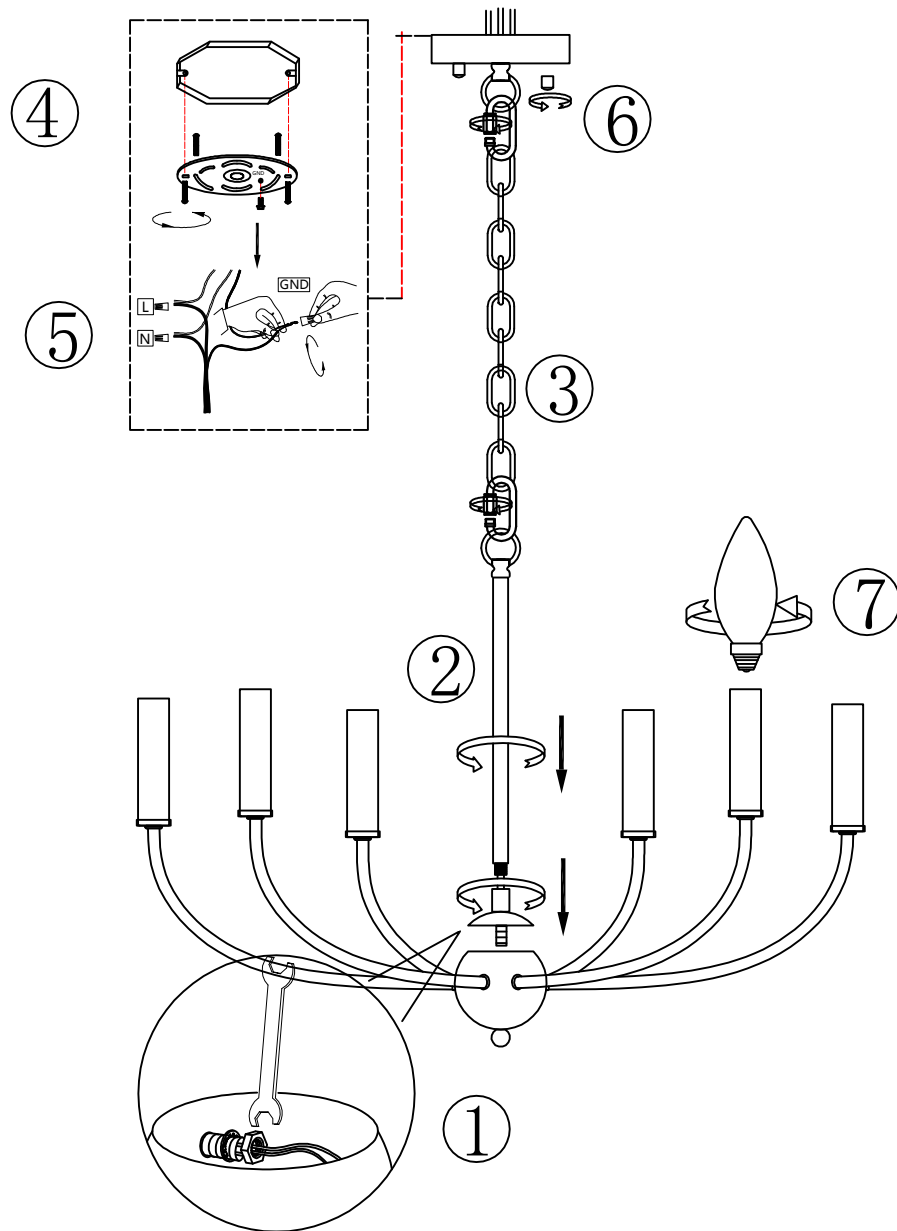

Thank you for using our products. Please read the operation manual before installation. Please keep this operation manual as a reference. Disconnect the power supply before installing this product. Installation by a professional electrician is recommended.

1. Remove the cylindrical nut at the top of the fixture, then use a wrench to fix the lamp arm firmly in turn, and finally put on the cover and tighten the cylindrical nut.
2. Fix the iron pipe to the cylindrical nut on the top of the fixture.
3. Attach the chain to the ring at the top of the iron pipe.
4. Attach the hanging plate to the reserved mounting box.
5. Connect the black wire to the black power cord and the white wire to the white power cord with wire caps (supplied) and tighten with insulating tape. Connect the fixture's ground wire to the junction box's ground wire. If the house does not have a ground wire, connect it to the green screw (the one labeled GND) on the wall plate.
6. Secure the fixture to the wall plate with the round head nut.
7. Install the bulb on the light head.

## Attention:

1. The input power of the lamp is AC 120V 50Hz.
2. Any behavior that violates residential fire protection regulations is prohibited.
3. Under no circumstances should the lamps be covered with heat insulation pads or wooden materials.
4. Before maintenance, make sure that the power supply of the lamp has been cut off and the light source has cooled down. Before powering on, make sure that the light source and the lamp holder are connected correctly.
5. Please wipe with a towel or flannel, and clean the lamp body with a non-corrosive detergent. Do not scrub directly, wipe with water or a damp cloth.
6. If you have any questions about this manual, please consult a qualified lighting installation engineer.