

FLAT PANEL

LED Panel Light

Design versatility, professional looking and dependable - FUDAKIN Flat Panel Lights are a terrific solution in a variety of commercial and retail environments. Typically mounted in the ceiling these lights provide a consistent, evenly distributed light coverage in any room. Our flat panels are a perfect replacement for traditional ceiling troffers, bringing bringing high quality illumination to any commercial or residential application.



● Features

- Outstanding optical design providing an efficient light source
- Extruded aluminum, anodized surface treatment helps to create a state-of-the-art heat sink
- High lumen output is ideal for illuminating large, open indoor spaces
- Life span of more than 50,000 hours
- Attractive styling and durability
- Wide input voltage, AC100-277V
- Available in 40W and 60W
- High-efficiency current driver
- Contains no mercury
- ETL/CETL and DLC certified

● Benefits

- Save 60% energy consumption compared to traditional lighting
- Easy installation
- Maintenance free
- High quality and reliability
- Long life

● Applications

Widely used for commercial offices, hotels, retail buildings, hospitals or any large indoor area



FLAT PANEL

LED Panel Light


Product Parameter

Model	Watt	Input Voltage	Size	CCT	Light Output	CRI	Beam Angle	Finish & Color	Dimmable
FDK-FP-22-27-40W-XXK-Z	40	AC100-277VAC	2X2 FT	3000 K 3500 K 4000 K 5000 K	≥ 4200 LM	≥ 80	120°	Powder Coating - White	Yes
FDK-FP-14-27-40W-XXK-Z	40		1X4 FT						
FDK-FP-24-27-40W-XXK-Z	40		2X4 FT						
FDK-FP-24-27-60W-XXK-Z	60		2X4 FT						
FDK-FP-12-27-20W-XXK-Z	20		1X2 FT		≥ 2100 LM				No

Product Ordering code

FDK-FP- -YY- -XXK-Z					
Product Series	Size	Input Voltage	Watt	CCT	Dimmable
FP - Flat Panel Series	12 - 1X2 FT 22 - 2X2 FT 14 - 1X4 FT 24 - 2X4 FT	27 - AC100-277VAC	20 - 20W 40 - 40W 60 - 60W	30K - 3000 K 35K - 3500 K 40K - 4000 K 50K - 5000 K	D - Dimmable N - Non-dimmable

Outline Drawing & Overall Size

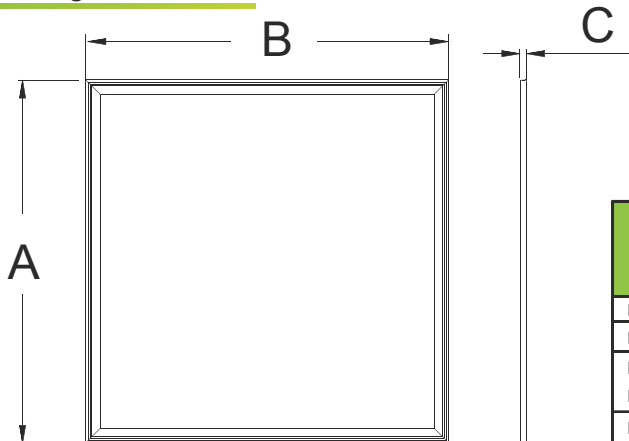

Model	A	B	C
FDK-FP-22-27-40-XXK-Z	603mm/23.75"	603mm/23.75"	10mm/0.39"
FDK-FP-14-27-40-XXK-Z	303mm/11.93"	1213mm/47.76"	10mm/0.39"
FDK-FP-24-27-40-XXK-Z	603mm/23.75"	1213mm/47.76"	10mm/0.39"
FDK-FP-24-27-60-XXK-Z	603mm/23.75"	1213mm/47.76"	10mm/0.39"
FDK-FP-12-27-20-XXK-Z	303mm/11.93"	603mm/23.75"	10mm/0.39"

