


Features

- Vitreous china
- Self-rimming
- With overflow
- 18-7/8" (47.9 cm) diameter

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- ASME A112.19.2/CSA B45.1

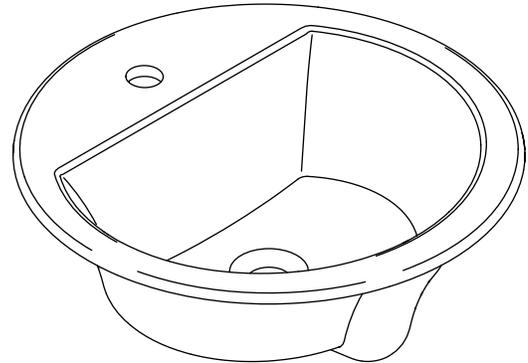

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-2714-1	Self-rimming lavatory – single-hole	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-2714-4	Self-rimming lavatory – 4" (10.2 cm) centers	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-2714-8	Self-rimming lavatory – 8" (20.3 cm) centers	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Recommended Accessories			
K-7107	Decorative drain OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-7108	Decorative drain OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-7129	Grid drain	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-9018	P-Trap	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____

Product Specification

The self-rimming lavatory shall be made of vitreous china. Lavatory shall be 18-7/8" (47.9 cm) in diameter. Lavatory shall have 8" (20.3 cm) centers (-8), 4" (10.2 cm) centers (-4), or single-hole drilling (-1). Lavatory shall be available with overflow. Lavatory shall be Kohler Model K-2714-_____-_____.

BRYANT™ ROUND

Technical Information

Fixture:*			
Basin area	12-1/2" (31.8 cm) x 16-5/16" (41.4 cm)		
Water depth	5-5/8" (14.3 cm)		
Drain hole	1-5/8" (4.1 cm) D.		
* Approximate measurements for comparison only.			
Holes	K-2714-8	K-2714-4	K-2714-1
Spout	1-3/8" D. (3.5 cm)	1-1/4" D. (3.2 cm)	1-3/8" D. (3.5 cm)
Faucet	1-3/8" D. (3.5 cm)	1-1/4" D. (3.2 cm)	
Included components:			
Cut-out template	1155260-7		

Installation Notes





Install this product according to the installation guide.

Spout must be 5" (12.7 cm) long (min) for adequate clearance into the lavatory when installed with the centerline as shown.

Spout must be tall enough to clear 3" (7.6 cm) rim height and provide a 1" (2.5 cm) air gap per ASME A112.1.1.

NOTICE: Countertop manufacturer or cutter **must** use the cut-out template provided with the product, or a current one provided by Kohler Co. (call 1-800-4-KOHLER). Kohler Co. is not responsible for cutout errors when the incorrect cut-out template is used.

Will comply with **ADA** when installed per Section 606 Lavatories of the Act.

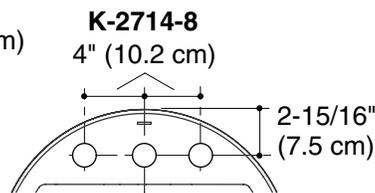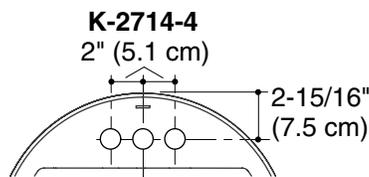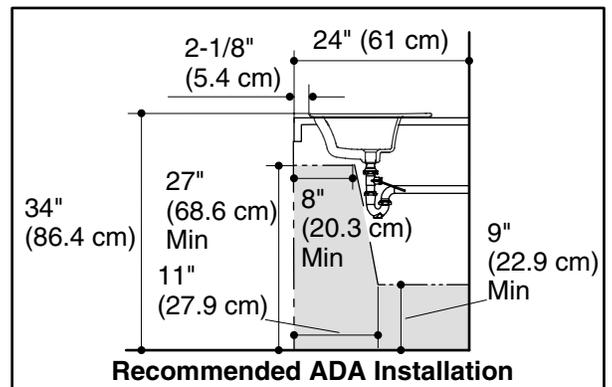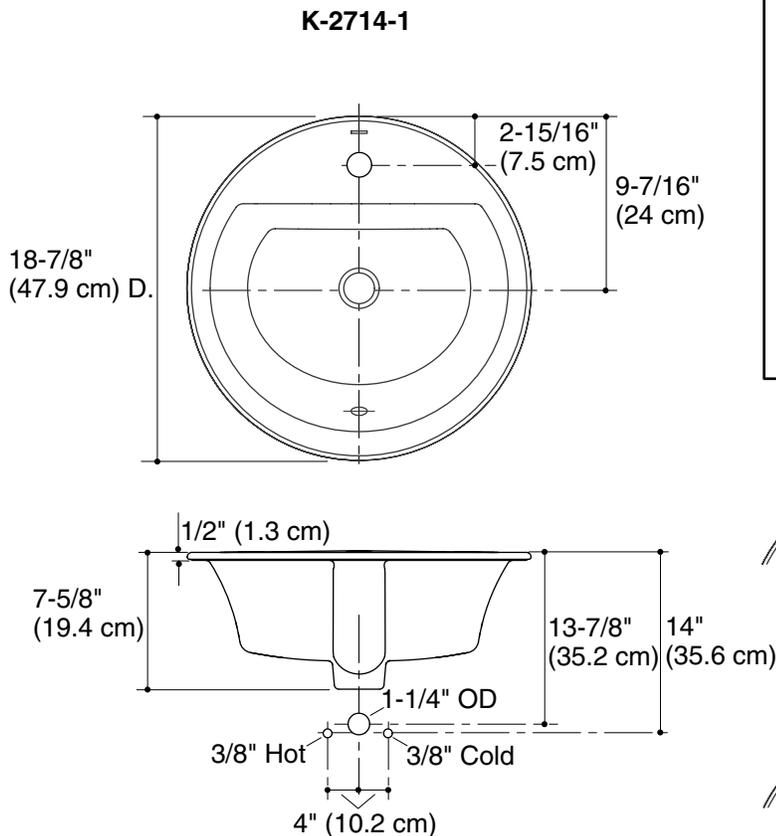

Product Diagram