










ASSEMBLY INSTRUCTION

Note:


1. Before fixing all screws, tighten each screw to 50% using an Allen wrench instead of an electric drill. If any screws are fully tightened during assembly, it is likely that the others will not align with their respective holes. Additionally, the holes are intentionally designed to be relatively larger to allow for adjustment of the screws.
2. Place the item on a flat surface to ensure stability during adjustment.
3. Gradually tighten all screws using appropriate tools.
4. If screws are not aligned with their respective holes during assembly, loosen all other screws to 50% and then continue the assembly process.
5. If the item is unstable, loosen all screws, adjust it on a flat surface, and then retighten all screws.

Hardware Fittings


Item No.	Reference Image	Description	Qty.	Extra Spare Parts Qty.
A		screw M6*25	8	1
B		screw M8*20	4	1
C		washer M6	8	1
D		washer M8	4	1
E		washer M6	8	1
F		allen key M6	1	1

Item No.	Reference Image	Description	Qty.	Extra Spare Parts Qty.
G		allen key M8	1	1
H		Spanner	1	1
I		Adjustable foot pads	4	1
J				
K				
L				

Step1

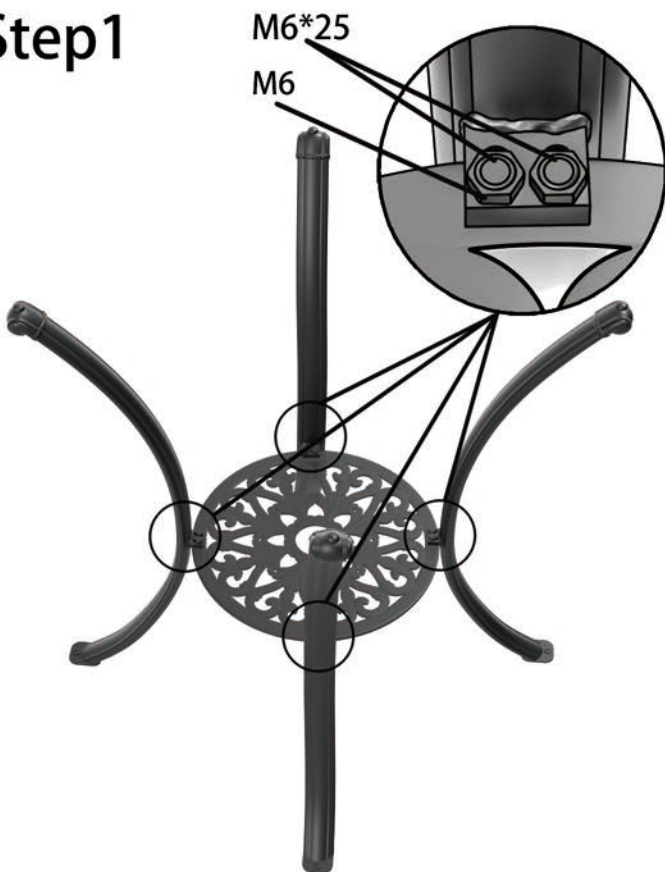

Step2

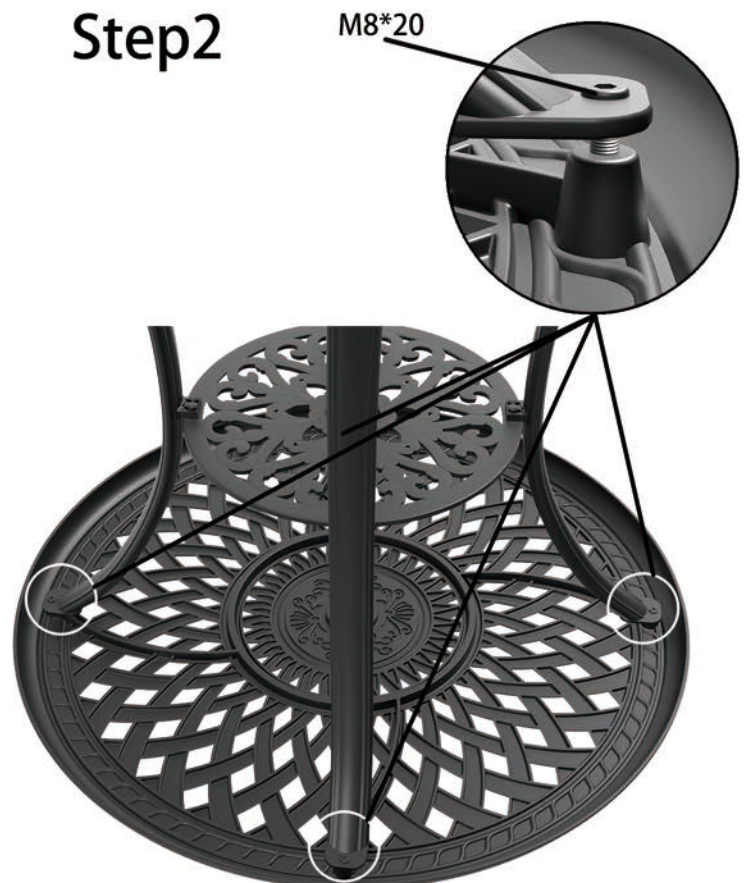












ASSEMBLY INSTRUCTION

Note:

1. Before fixing all screws, tighten each screw to 50% using an Allen wrench instead of an electric drill. If any screws are fully tightened during assembly, it is likely that the others will not align with their respective holes. Additionally, the holes are intentionally designed to be relatively larger to allow for adjustment of the screws.
2. Place the item on a flat surface to ensure stability during adjustment.
3. Gradually tighten all screws using appropriate tools.
4. If screws are not aligned with their respective holes during assembly, loosen all other screws to 50% and then continue the assembly process.
5. If the item is unstable, loosen all screws, adjust it on a flat surface, and then retighten all screws.

Hardware Fittings

Item No.	Reference Image	Description	Qty.	Extra Spare Parts Qty.
A		screw M6*25	4	1
B		screw M8*30	11	1
C		washer M6	4	1
D		washer M8	11	1
E		washer M8*5	11	1
F		allen key M4	1	1

Item No.	Reference Image	Description	Qty.	Extra Spare Parts Qty.
G		allen key M5	1	1
H		Spanner M8	1	1
I		Adjustable foot pads	4	1
J		spring washer M6	4	1
K		spring washer M8	11	1
L				

Step1



Step2



Step3

