

Quartz Composite Undermount Kitchen Sink

A02R-S3017B1

Contents

Important Information 1

Dimensions 2

Product Installation 2

 Tools Needed for Installation 2

 Parts Included 3

 Prior to Installation 3

 Installation of Sink 4

Care & Maintenance 7

Warranty 8

- Thank You for Choosing HOROW. Please read the instructions carefully before installation and keep it available for future maintenance or reference.
- We are not responsible for the accidents resulting from the user's negligence.
- HOROW reserves the right to make revisions to this manual without notice.



Need help? Contact HOROW Customer Service Team.

Phone: (+1)209-200-8033

Monday to Friday

Email: support@horow.com

Important Information




1. Please keep the box and packaging materials until your product is completely installed.
2. If you have any questions, require technical assistance or have any problems with your product: please contact our Customer Service Team.
3. Please have the model number available and retain a copy of your purchase receipt for reference.
4. If for any reason this product does not meet your expectations, please repack this product in the original box and packaging material to avoid damage during transit.
5. Under no circumstances shall we be liable for any incidental damages sustained in connection with this product.

Dimensions

Model: A02R-S3017B1

Dimensions: 29-1/2" * 17-5/16" * 8-1/4"

Minimum Cabinet Size: 32-1/2"

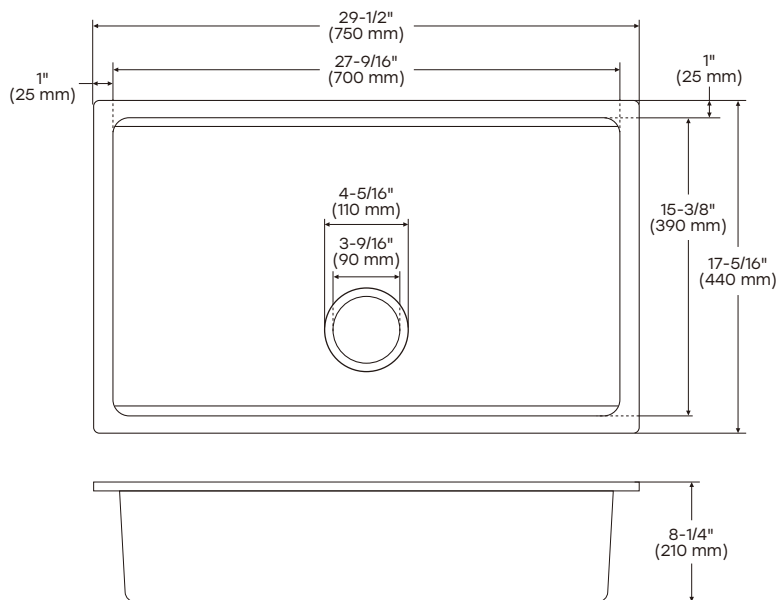

Product Installation

Tools Needed for Installation

Please have these tools prepared prior to installation.




Note: Specialized tools may be necessary to install HOROW quartz composite kitchen sinks with countertop materials other than wood, marble, or granite.


Parts Included

Please confirm that all items below are inside the box.


Model: A02R-S3017B1

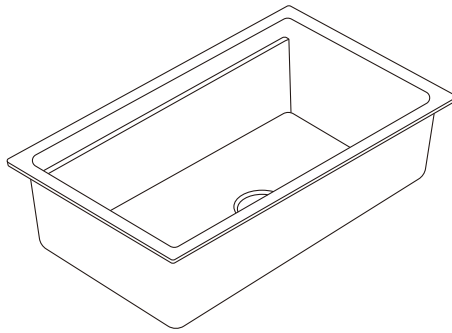


Kitchen Sink
Appearance is for reference only.




Cutting Board




Bottom Grid




Drying Basket



Roll-up Drying Rack



Mounting Hardware
(6 pcs)



Drain Assembly



Drain Cap

Prior to Installation



1. Make sure that you have all necessary parts by checking the parts list. If any part is missing or damaged, please contact our Customer Service Team.
2. Inspect the sink prior to installation to make sure that it has not been damaged during shipping.
3. Follow all applicable state and local plumbing and building codes.
4. Read the installation and maintenance instructions carefully before installation. Always use appropriate tools and wear appropriate personal protective equipment during installation.
5. HOROW strongly recommends professional installation by a licensed plumber.
6. All dimensions are nominal. Verify actual product dimensions before installation.


Installation of Sink

Install your sink using the following steps:


1

Determine Reveal Type


HOROW recommends the Flushed Reveal installation type.




3/8" Positive Reveal



Flushed/Zero Reveal
HOROW Recommended Installation Type



1/8" Negative Reveal

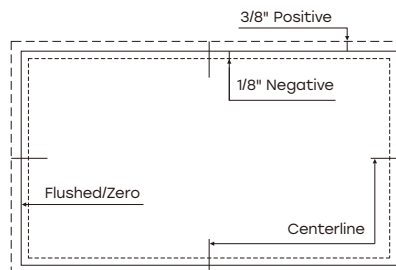


2

Measure Cutout Size

Turn the sink upside down and measure the actual dimensions from the underside to ensure the correct cutout size.

Note:


Make sure clearance is suitable for backsplash, faucet and plumbing for the sink.

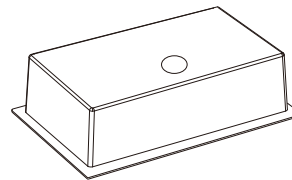

3

Mark Cutout Size

Trace the cutout line on the countertop with a pencil.



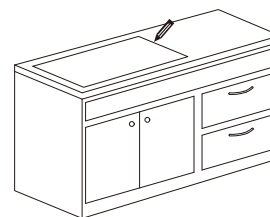


4

Cut Countertop

Carefully cut the opening in the countertop by following the traced line.

✘ To avoid the risk of personal injury, wear safety glasses and cut-resistant gloves with non-slip grip when cutting.

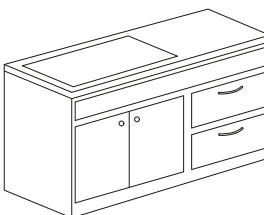


Note:

Use the appropriate saw that best fits your countertop material.

5 Determine Mounting Hole Locations


Turn the countertop over and align the sink with the countertop cutout opening. Mark the locations for the mounting brackets.

Mounting holes should be 1/2" from the edge of the sink.

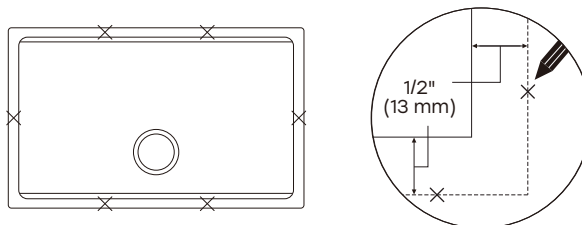


6 Drill Holes in Countertop

Drill 5/16" diameter x 5/16" deep holes in the countertop.

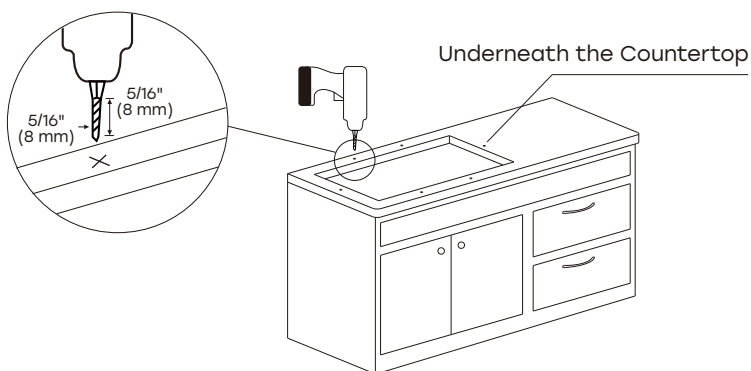


7 Install Anchors

Insert the brass inserts into the drilled and lightly tap with a hammer until flush.

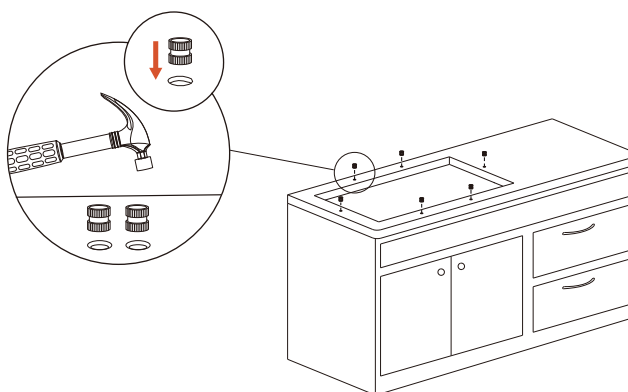

8 Secure Sink to Countertop


Use a bead of silicone sealant (or preferred adhesive) around the rim of the sink. Check the alignment of the sink to the cutout in the countertop. Place the sink over cutout hole and press firmly.

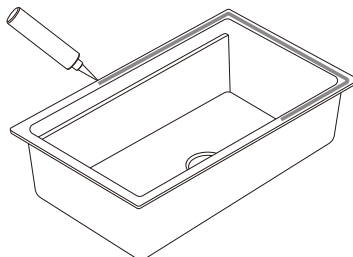

9 Attach Mounting Hardware

Attach mounting hardware to secure the bowl. Fix the mounting clips as shown below. Firmly tighten the screw into the brass insert. Once the sink is correctly installed, tighten the wing nuts to fix it into place. Remove excess sealant from inside lip.

Allow sealant to set for 30–60 minutes.

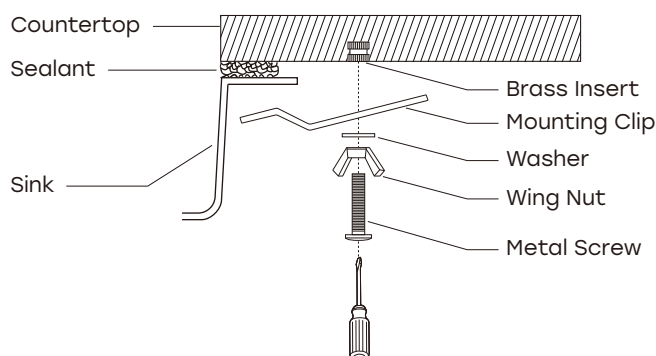

10 Install Plumbing Fixtures


Connect the basket strainer assembly to the sink. Connect the trap to the basket strainer assembly. Connect the water supply connections to the faucet according to manufacturer's instructions.

Run water into sink and check for leaks.



Install the basket strainer assembly as described below. It is easier to install the strainer assembly before mounting the sink to the cabinet.

1. Apply a small amount of sealant (not included) around the drain opening of the sink.
 2. From underneath the sink, place the rubber washer (5) and drain body (6) onto the drain opening.
 3. Place the strainer ring (4) and the strainer bowl (3) over the drain opening.
 4. Insert the center screw (2) and tighten it securely.
 5. Insert the strainer basket (1) into the center opening to complete the installation.
- ※ The sealing gasket (7) and drain tailpiece (8) are included and can be used to connect to the P-trap if needed.

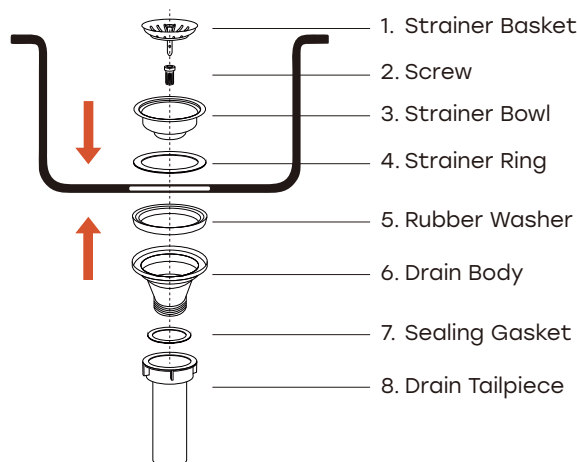


Basket Strainer Assembly Installation

Care & Maintenance

The kitchen sinks require regular cleaning and maintenance to prevent water spots, clouding and discoloration.

- ※ Clean your sink regularly with warm soapy water. Rinse thoroughly after using any cleaning products. Wipe the surface with a soft cloth to remove water spots and residue.
- ※ Do not cut food directly on the surface of the sink.
- ※ Do not leave sharp objects on the surface of the sink for an extended period of time.
- ※ Do not use abrasive cleaners, sanding tools, steel wool or bleaching products as use of such products may affect product performance or void the warranty.
- ※ Do not place hot pots, pans or utensils directly onto the sinks surface. Let them cool completely before placing them on the sink surface.

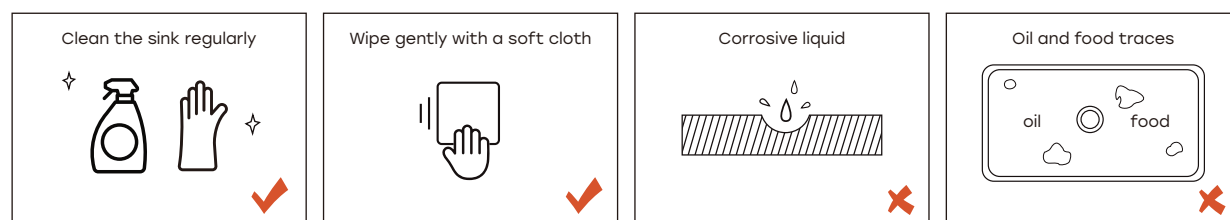

Warranty

ONE YEAR LIMITED WARRANTY

HOROW products are made with high-quality materials and workmanship to provide customers with products that are built to last. If any defects in material or workmanship are detected during normal use within the first year of purchase, such as the replacement of any product or product part that you consider to be defective, HOROW will provide replacement parts free of charge. We are **not responsible** for all damages that result from **improper installation resulting in unavailability, repair and maintenance**. This warranty applies only to the original purchaser. Proof of purchase and **evidence of damage** will be required in the case of a **claim**.

HOROW recommends the installations to be made by a licensed, professional plumber.

HOROW will not be held responsible for any damage or product failure due to improper installation, misuse, or failure to use a licensed professional. HOROW is not responsible for any removal or installation cost.

This One Year Limited Warranty will be voided if:

The installation recommendations were not followed.

The product has been moved from its initial place of installation.

The product has been modified.

The product has been subjected to improper maintenance, abuse, misuse, excessive use of chemicals, accident or other damages.

HOROW makes no implication that products comply with any or all local building or plumbing codes. It is the consumer's responsibility to determine local code compliance. This warranty extends to the original purchaser and first consumer.

HOROW is not liable for any incidental, consequential or special damages associated with the return, replacement, installation or use of your product. This includes freight costs, labor, travel time, lost profit, home damages and other contingent liabilities and costs (including, without limitation, costs associated with experts, investigations, analyses, attorneys and other professionals and services).

The HOROW warranty is a comprehensive and explicit limit of liability, and all items outside of it are not addressable by or the responsibility of HOROW. Certain states have variances regarding implied warranties and in those situations, we remain fully compliant.

Warranty Registration

Proof of purchase is required to validate this limited warranty. HOROW encourages you to register your product upon purchase to create a record of ownership at www.horow.com. Registration is voluntary and not required to maintain your limited warranty rights.



For any questions or claims, please contact us by phone or email.

Phone: (+1)209-200-8033

Monday to Friday

Email: support@horow.com

When making a claim, please prepare a photo of the evidence of damage so that we can quickly resolve the claim for you.



Warning

Content may contain sharp and other possibly harmful pieces and may cause hazard to children and adults, HOROW is not responsible in any way for personal damage.