

SPECIFICATION SHEET

Ceiling Fan



Specifications

Size	56"
Blades.....	Steel Blades (White)
Blade Pitch.....	9°
Approved Location	Indoor
Suggested Room Size.....	Great Room (up to 20x20)
Down Rod.....	1/2 x 12"
Installation.....	Down Rod Only
Max. Ceiling Angle.....	N/A
Lead Wire	54"
Light Bulb Usage.....	N/A
Control	Wall control included
Motor Finish.....	White
Motor Material	Silicon Steel Motor 172mm x 15mm
Reverse Airflow.....	Yes
Capacitor	Single
Switch Housing Cap.....	Not Included



Energy Information

	<u>With down rod</u>	<u>Hugger/ Without down rod</u>
Airflow (CFM) when operated at high speed.....	4833	N/A
Energy Use (excludes lights) ^Δ	41	N/A
Airflow (CFM) ^Δ	3438	N/A
Airflow Efficiency (CFM/W) ^Δ	84	N/A
Estimated Yearly Energy Cost ^Δ	\$11	N/A
RPM (High)	196	
Amp (High).....	0.50	
Watts (High)	56	




^Δ Based on typical use, excluding lights
^{*} Based on 12 cents per kWh and 6.4 hours use per day

SPECIFICATION SHEET

Ceiling Fan

56 in. White Finish
White Steel Blades J Hook Installation System

A. Top of Canopy to Bottom of Blades	18.5"
B. Top of Canopy to Bottom of Switch House	17.3"
C. Top of Canopy to Bottom of Canopy	4"
D. Width of Motor Housing.....	7.7"
E. Width of Canopy.....	5.7"
F. Top of Canopy to Bottom of Glass.....	N/A

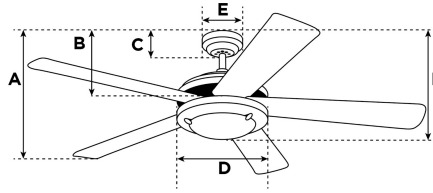

If a Combo Style Fan with a 4" Down Rod is installed without the Down Rod, Subtract 3" from the Dimensions Listed (A, B, F).
If a Combo Style Fan with a 6" Down Rod is installed without the Down Rod, Subtract 5" from the Dimensions Listed (A, B, F).

Warranty

Ceiling fans backed by our 15-year Limited Warranty have a 15-year motor warranty and a 2-year warranty on all other parts.

Caution

For safe operation, this product must be installed with a minimum clearance of 10 feet from the floor to the lowest edge of the fan blades.