

# INSTALLATION INSTRUCTIONS

## IMPORTANT

Before assembling your fixture, please make sure that you carefully read through these instruction sheets. Consider having your fixture installed by a qualified licensed electrician.



**NOTE:** The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

## GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and National Electrical Codes. These fixtures are intended for mounting to a standard 4" x 2 1/2" metal octagon outlet box. The box must be directly supported by the building structure and U.L. Recognized.

## STEP BY STEP INSTRUCTIONS

Before starting your installation disconnect the Power by turning off the Circuit Breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.

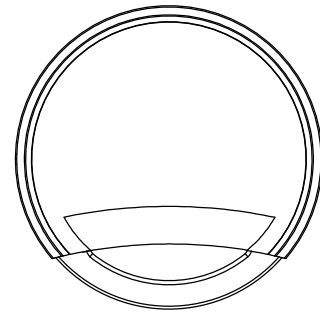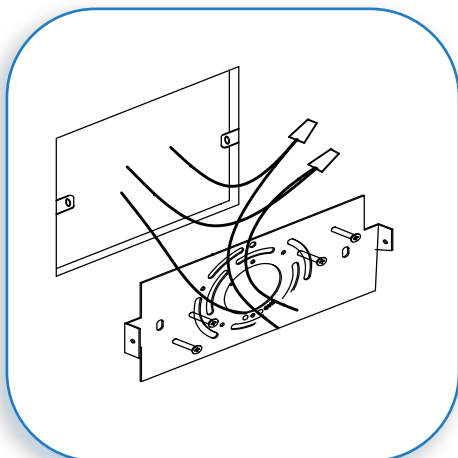

## APPLICATION

Wall Fixture

### WHAT WE PROVIDE

- Mounting Hardware
- Crossbar
- LED

### WHAT YOU NEED

- Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by Electrical Code


1

### MOUNT CROSSBAR

If there is an existing fixture remove it.

Expose the supply wire from the J-box.


Mount the crossbar to the J-box with the supplied screws.

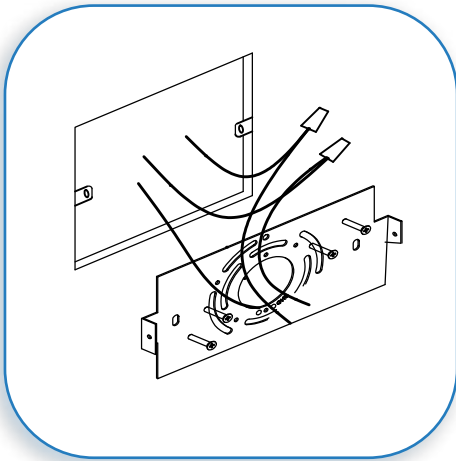

2

## WIRE CONNECTIONS

Connect the black supply wire to the black fixture wire. Secure with the supplied wire nuts. Connect the white supply wires to the white fixture wire. Secure with the supplied wire nuts. Either wrap the green wire around one of the protruding screws or connect it to the supply ground wire. Secure all wire with electrical tape (not supplied). Tuck all wires carefully into the J-Box.

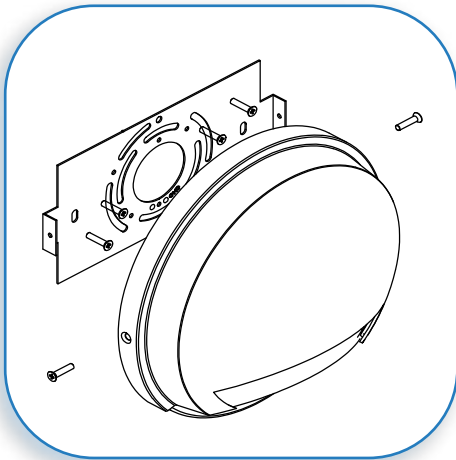


3

## MOUNT FIXTURE TO CROSSBAR

Position the fixture over the crossbar. Align the side holes of the fixture and secure with the supplied screws.

\*\* This fixture is wet location rated. In order to ensure that moisture does not enter the outlet box and cause a short circuit, clear caulking should be used to seal the space between the fixture mounting bracket and the wall. Ensure that a space is left at the bottom to allow for the escape of moisture. It is required that Indoor/Outdoor Silicon Sealant be used for that purpose\*\*

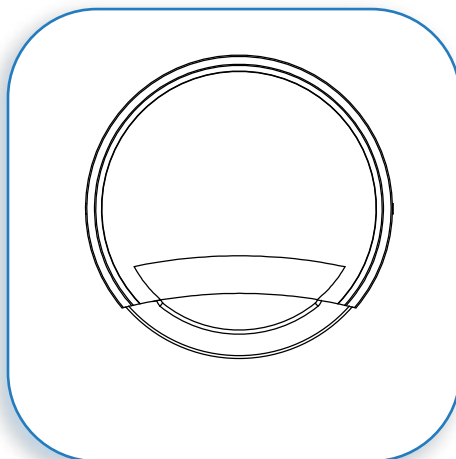

4

## RESTORE THE ELECTRICITY AND CHECK THE OPERATION OF YOUR

