


FENRIC ACRYLIC LINEAR PENDANT

DESIGN # CTL1120

Assembly Instructions

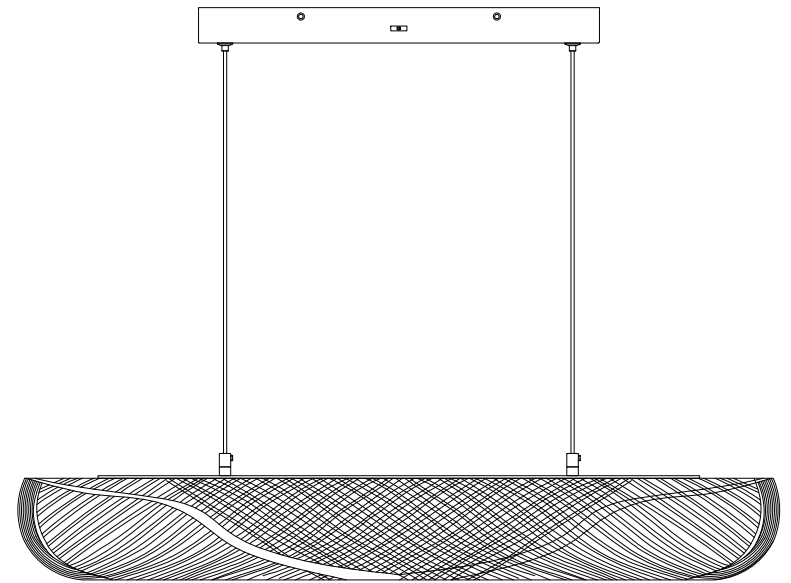

Need help?

Feel free to contact us via email or call
if you have any specific questions!

contact us:

cs@safavieh.com

866-422-9070

SAFAVIEH
C O U T U R E

Thanks for bringing Safavieh Couture into your home

Every thing we make is incredibly simple to set up, including your new pendant. Tools Required for Assembly (not included): Screwdriver, Junction box

Parts List


Ax3

Wire Nut



Bx1

Mounting
bracket



Cx2

Outlet box screw



Dx4

Anchor




Ex4

Wood screw



Fx1

Fixture body




Gx4

Mounting screw




1

Determine the position for the mounting plate (B) and mark the location holes. Drill a hole at each marked position, and insert an anchor (D) into each hole and secure it with wood screw (E). Attach the mounting plate (B) to the junction box with outlet box screw (C).

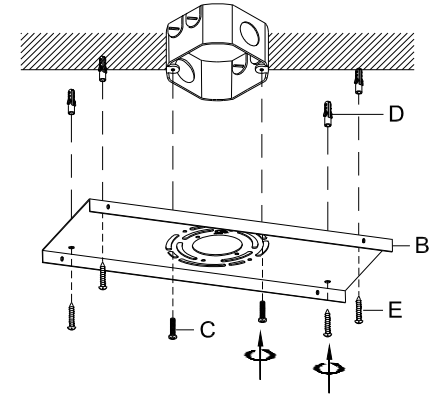

2

Attach the hang buckle from the canopy to the mounting bracket (B).

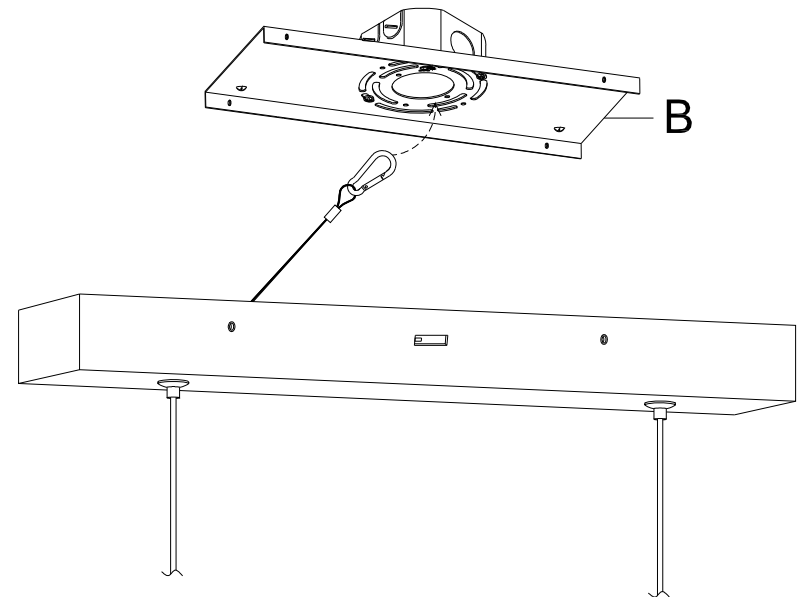

**Thanks for bringing
Safavieh Couture into
your home**

Every thing we make is incredibly simple to set up, including your new pendant. Tools Required for Assembly (not included): Screwdriver, Junction box

3 Wire connection

Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut. Connect fixture hot wire (smooth and with markings) to the outlet box hot wire (usually black) using a wire nut.

CAUTION: Do not reverse the hot and neutral connections! Make sure they are inserted properly.

Grounding Instructions:


Wrap the ground wire from the outlet box around the green ground screw on the mounting bracket no less than 2" from the end of the wire. Tighten the ground screw. If the fixture is supplied with a ground wire, connect it to the outlet ground wire with a wire nut.




4

Attach the fixture body (F) to the mounting plate(B) with mounting screw(G).

Adjust the electric cable to be a suitable length.

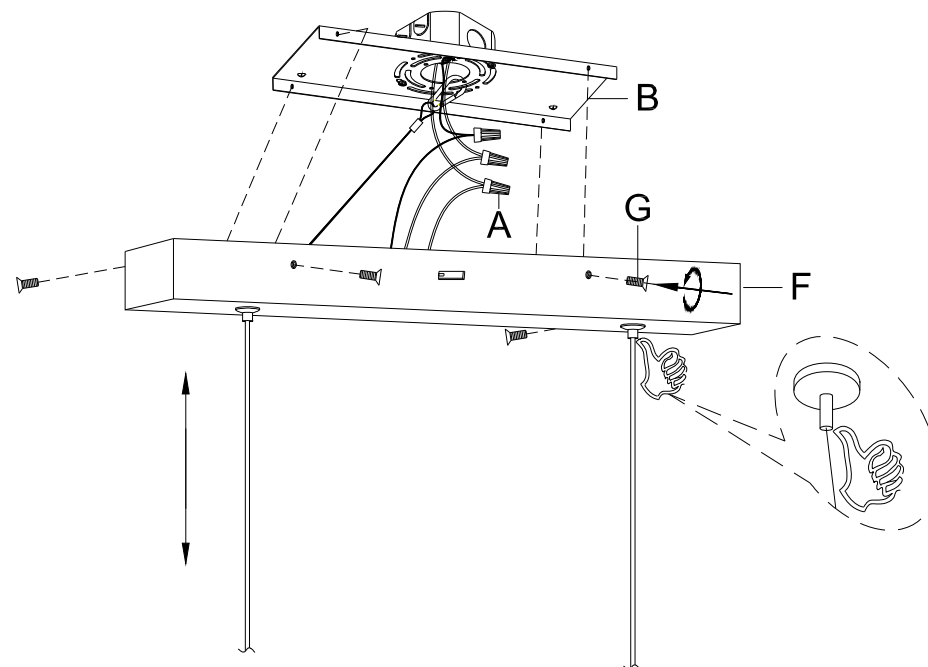

Select your favorite color temperature (CCT) from three options: 3000K, 4000K, or 5000K by the slide switch located on the side of the box.

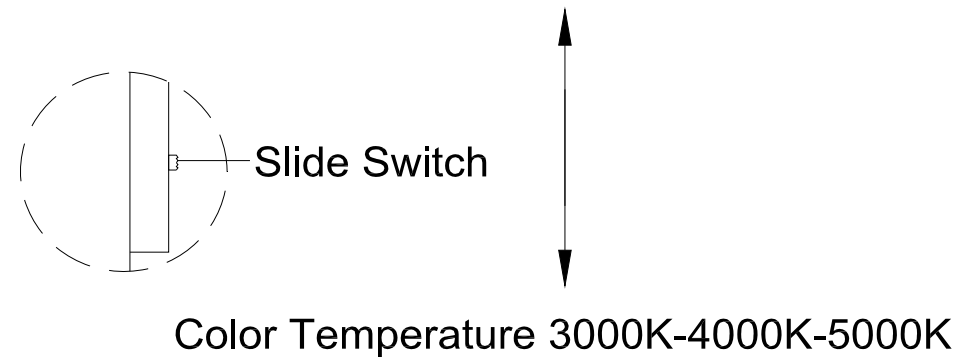

**Thanks for bringing
Safavieh Couture into
your home**

Every thing we make is incredibly simple to set up, including your new pendant. Tools Required for Assembly (not included): Screwdriver, Junction box

Dimmable drive can be compatible with the following 10 commonly used dimmers in the United States:	
Lutron DVCL-153P	Lutron MACL-153MLH-WH
Lutron P-PKG1W-WH-R	Lutron STCL-153PH-WH
Leviton R11-DSL06-1TW	Leviton R00-RNL06-0TW
Leviton R02-DW6HD-2RW	Leviton R68-06674-POT
Legrand RHCL453PNICCV4	TP-link HS220