



# Avid® | K-T97367-4

Floor-mount bath filler trim

## Features

- A single handle controls both on/off activation and temperature setting
- Stationary spout
- 7.5 gpm (28.4 lpm) maximum bath faucet flow rate at 45 psi (3.1 bar)
- 1.75 gpm (6.6 lpm) maximum handshower flow rate at 80 psi (5.5 bar)
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Coordinates with other products in the Avid collection



## Sustainability



## Available Colors/Finishes

*Color tiles intended for reference only.*

- |     |                               |
|-----|-------------------------------|
| CP  | Polished Chrome               |
| BN  | Vibrant Brushed Nickel        |
| BL  | Matte Black                   |
| 2MB | Vibrant Brushed Moderne Brass |



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
8-10-2026 17:14 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards



ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)

## Technical Information

*All product dimensions are nominal.*

### Handle

Handle Style/Type: Lever

### Spout

Spout Reach: 8-3/4" (223 mm)

### Flow Rate

Faucet Flow Rate: 7.5 gpm (28.4 l/min)

Handshower Rated Maximum Flow: 1.75 gpm (6.6 l/min)

## Valves

Required Valves: Thermostatic, Volume Control

## Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

## Recommended Products/Accessories

K-97500 Double robe hook  
K-23723 Faucet cleaner  
K-97498 Towel arm  
K-97499 Robe hook  
K-97494 18" towel bar  
K-97495 24" towel bar  
K-97496 24" double towel bar  
K-97502 Vertical toilet paper holder  
K-97503 Covered toilet paper holder

## Required Products/Accessories


- K-97342 Mounting-block for Avid® bath filler

## Warranty

*See website for detailed warranty information.*

KOHLER® Faucet Lifetime Limited Warranty



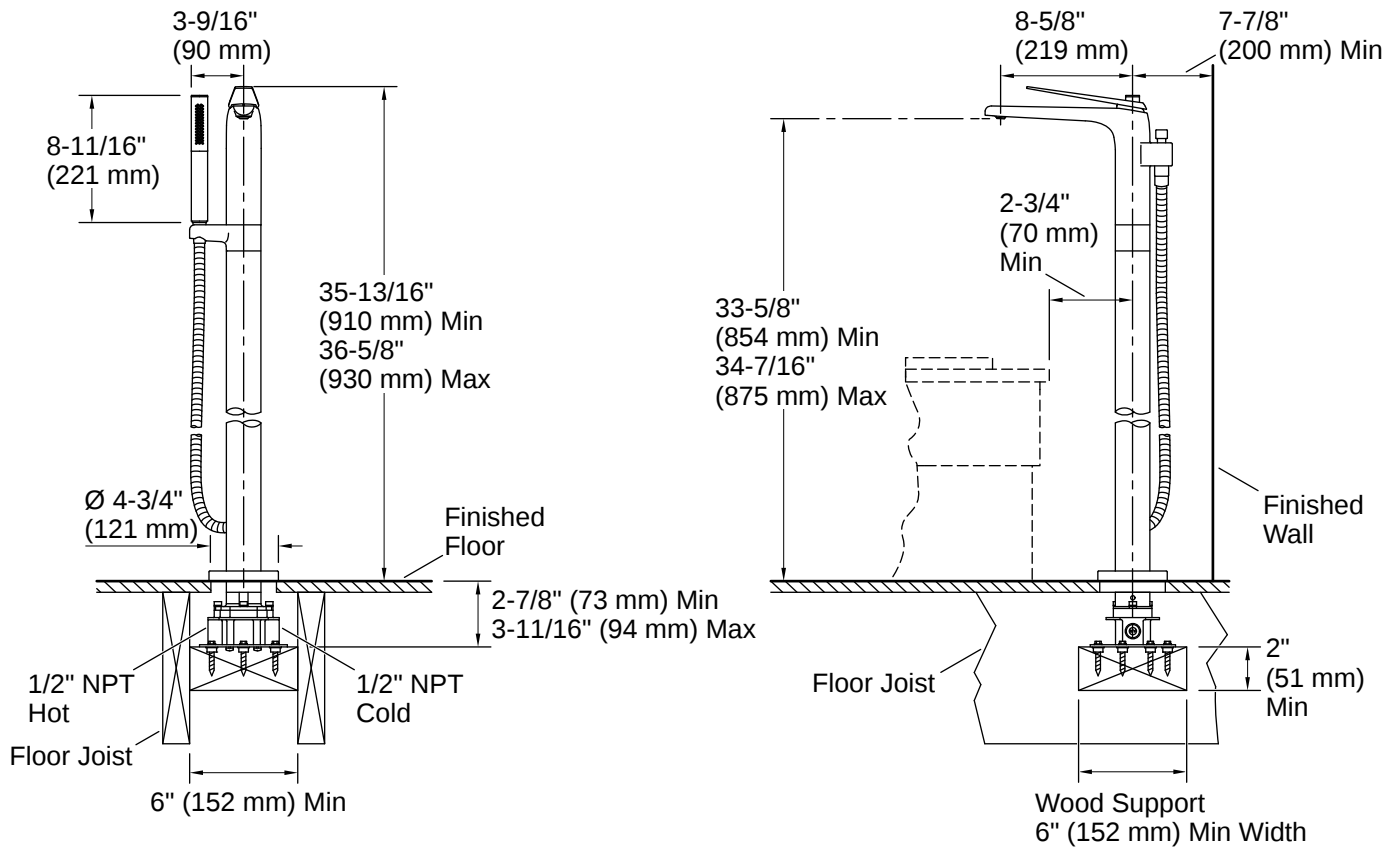

## Installation

- Floor-mount

## Installation Notes

*Install this product according to the installation instructions.*

Adequate floor support is required. The wood support must be a minimum of 2" (51 mm) thick by 6" (152 mm) wide. 2x6 lumber is NOT adequate for this application.

Concrete can be used as the floor support. Requires 3/16" masonry drill bit and six 1/4" x 1-3/4" concrete screws, not included.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

8-10-2026 17:14 - US-CA