

EL518RICA

5" Line Voltage Remodel
Sloped Ceiling Housing


PROJECT INFORMATION:

Project Name: _____

Fixture Type: _____

Date: _____

DIMENSIONS

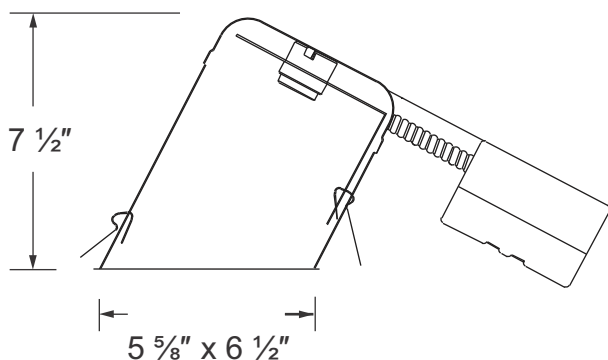

PRODUCT SPECIFICATIONS

- Single wall IC construction, for use in insulated ceilings.
- Adjustable housing accommodates up to 1 1/4" ceiling thickness.
- Adjustable socket bracket allows the use of different lamp types and sizes as well as proper and consistent positioning.
- Housing meets restricted air flow requirement (per ASTM E-283).
- CA Title 24 compliant (as low efficiency luminaire).
- Trims sold separately.

Lamp: 75W Max 120V, A19/A21/R30/PAR30L/PAR30 (not included, by others)

Lamp Holder: Medium base socket

Labels: U.L. listed for damp locations
U.L. listed for feed through
U.L. listed for direct contact with insulation

INSTALLATION

Junction Box: Pre-wired junction box provided with 1/2" and 3/4" knockouts. Maximum (8) No. 12 AWG branch circuit conductors (4 in, 4 out). Junction box provided with removable access plates.

Mounting: (4) remodel clips secure housing and accommodate various ceiling thicknesses.

Mounting Frame: Stamped galvanized steel construction for corrosion resistance

CATALOG NUMBER

Example: EL518RICA

See trims page for variety of trims available

