ZEPHYR

ZEPHYRONLINE.COM


	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*		
Min. - Max. CFM	200 - 700	200 - 590	200 - 390	200 - 290
Min. - Max. Sones	0.8 - 6			

*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.







ACT™ PowerWave™

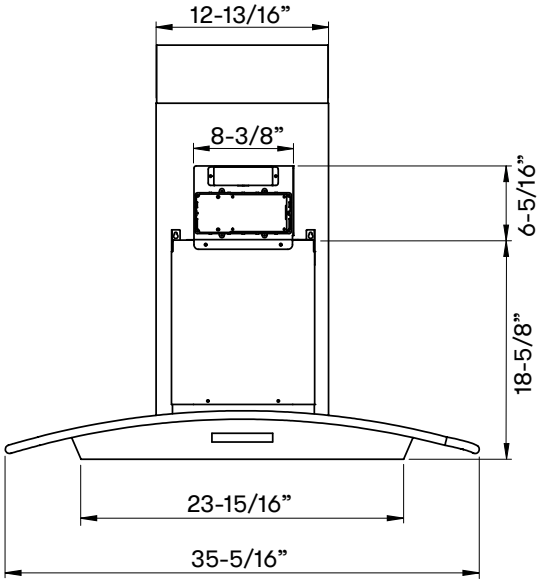

FRONT

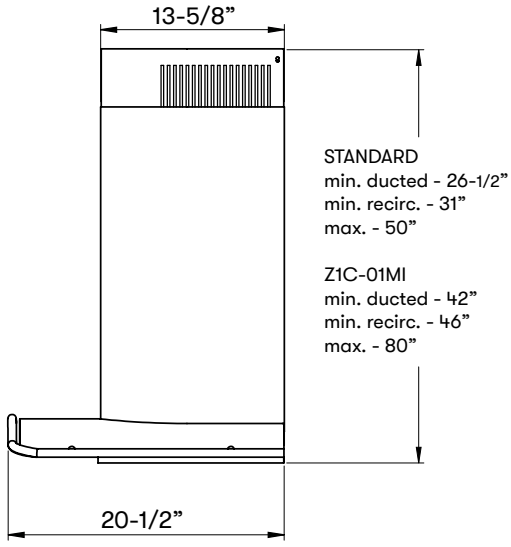

SIDE

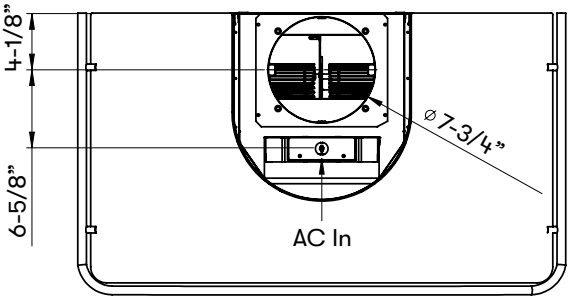

TOP

ZEPHYR

ZEPHYRONLINE.COM

MODEL	
Glass Canopy	ZMI-M90CG
Stainless Steel Canopy	ZMI-M90CS
Size	36”
BLOWER PERFORMANCE	
Blower CFM (Min. - Max.)	200 - 700
Sones (Min. - Max.)	0.8 - 6
ACT 590 CFM (Min. - Max.)	200 - 590
ACT 390 CFM (Min. - Max.)	200 - 390
ACT 290 CFM (Min. - Max.)	200 - 290
FEATURES	
ACT™ Technology	590, 390, 290
Controls	Proximity Touch
Speed Levels	6*
Auto Delay-Off	Yes
CleanAir Function	Yes
Lighting	LumiLight LED, 6W x2
Tri-Level Lighting	Yes
Filters	Aluminum Mesh x1
Recirculating Option	Yes
Extension Duct Cover Option	Yes, Up to 12’ Ceiling
ADA Compliant	Yes, with remote accessory
DUCT SPECIFICATIONS	
Vertical Internal Blower	8” Round
Horizontal Internal Blower	NA
AC POWER	120V, 60Hz at Max. 5A
OPTIONAL ACCESSORIES	
Wireless Remote Control	14000005
Recirculating Kit	ZRC-00MI
Extension Duct Cover	Z1C-01MI
Make-Up Air Kit	MUA008A
MOUNTING HEIGHT RANGE**	24” - 34”
WARRANTY	3 years parts, 1 year labor

CEILING HEIGHT		8’	8.5’	9’	9.5’	10’	10.5’	11’	12’
STANDARD DUCT COVER	Ducted Mounting Height*	24” - 33.5”	24” - 34”	24” - 34”	28” - 34”	34” - 34”	NA	NA	NA
	Recirc Mounting Height*	24” - 29”	24” - 34”	24” - 34”	28” - 34”	34” - 34”	NA	NA	NA
EXTENSION DUCT COVER	Ducted Mounting Height*	NA	24” - 24”	24” - 30”	24” - 34”	24” - 34”	24” - 34”	24” - 34”	28” - 34”
	Recirc Mounting Height*	NA	NA	24” - 26”	24” - 32”	24” - 34”	24” - 34”	24” - 34”	28” - 34”

*When ACT™ is enabled the maximum speed levels will change. ACT 590 CFM = 5 speeds, ACT 390 CFM = 4 speeds and ACT 290 CFM = 3 speeds.
**Mounting height refers to distance between top of a 36” tall cooking surface and bottom of hood.

ACT™

Airflow Control Technology™ (ACT™)
is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

POWERWAVE™

PowerWave™ 3-Phase Blower Technology
delivers best-in-class performance with unparalleled quiet operation. It provides more power while minimizing noise and improving efficiency.

Specifications subject to change, check zephyronline.com for up-to-date information.
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

OCT26.0101

c UL US