









PRE-ASSEMBLY PREPARATION:







DO NOT LET CHILDREN PLAY IN OR AROUND THE UNIT DUE TO THE POSSIBLE RISK OF FINGER ENTRAPMENT.

- Please read through the instructions before beginning assembly.
- Two adults are recommended for assembly.
- Clear out the space for assembly and lay out all of the parts based on the Parts List, extra room will allow you to easily determine if all the pieces are present.
- Save all packing materials until assembly is complete to avoid accidentally discarding smaller parts or hardware.
- Keep small parts and pieces away from children until fully assembled.
- Ensure that all bolts are securely tightened before use. It is recommended that you re-check all nuts and bolts
- Do not swing in the chair beyond the parameter of the base as doing so may result in the chair tipping over and
- Use on even surfaces only.
- Improper use of this product or failure to use as directed may result in injury.

PANEL AND FITTINGS IDENTIFICATION:

		
Left Arm (A1) Qty:1	Right Arm (A2) Qty:1	Chair Back (B) Qty:1
		
Seat Panel (C) Qty:1	Seat Cushion (H) Qty:1	Back Cushion (I) Qty:1


HARDWARE LIST:

			
Washer (D) Qty: 10	Short Bolt (E) Qty: 4	Long Bolt (F) Qty: 6	Allen Wrench (G) Qty: 1

STEP-BY-STEP ASSEMBLY:

1

Step 1: Secure chair back (B) to left arm (A1) with 2 washers (D) and 2 short bolts (E) by using allen wrench (G). Do not fully tighten now.

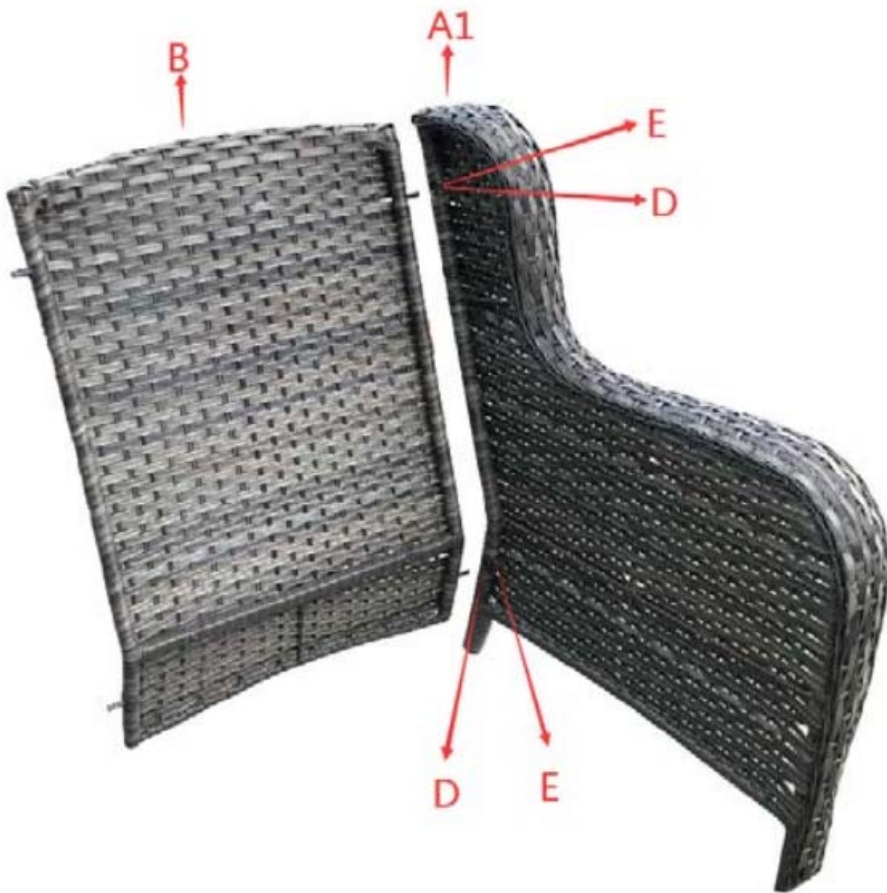


2

Step 2: Secure right arm (A2) to the other side of assembled chair back (B) with 2 washer (D) and 2 short bolts (E) by using allen wrench (G). Do not fully tighten now.




3

Step 3: Secure seat panel (C) to assembled chair arms (A1.A2) with 4 washer (D) and 4 long bolts (F) by using allen wrench (G). Do not fully tighten now.

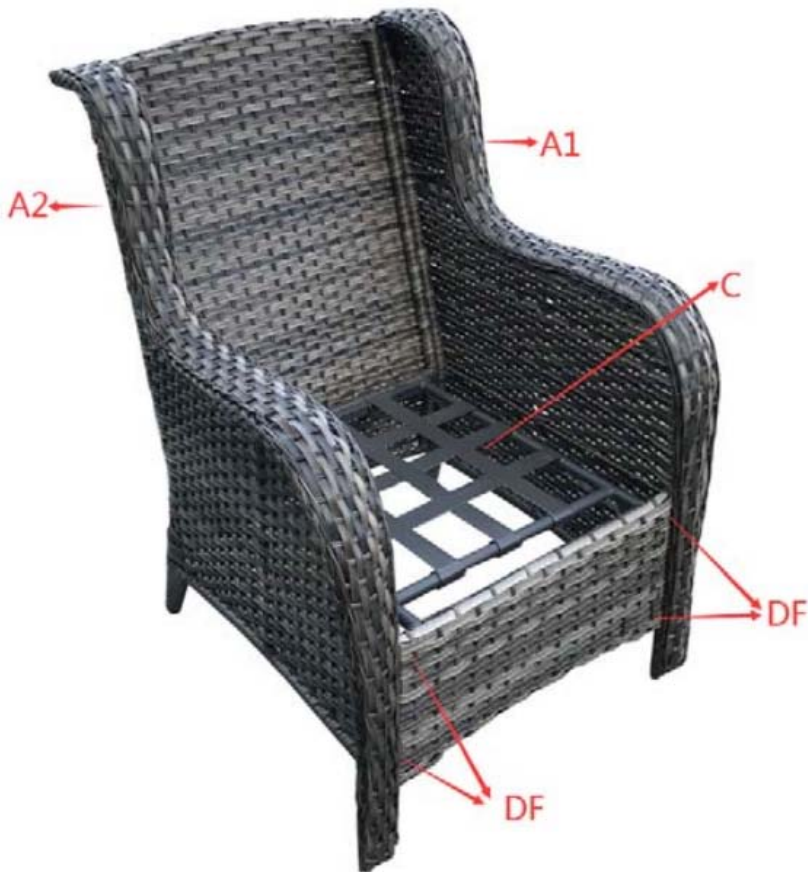

4

Step 4: Secure seat panel (C) to assembled chair back (B) with 2 washer (D) and 2 long bolts (F) by using allen wrench (G). Verify the alignment and adjust, then fully tighten all the screws.

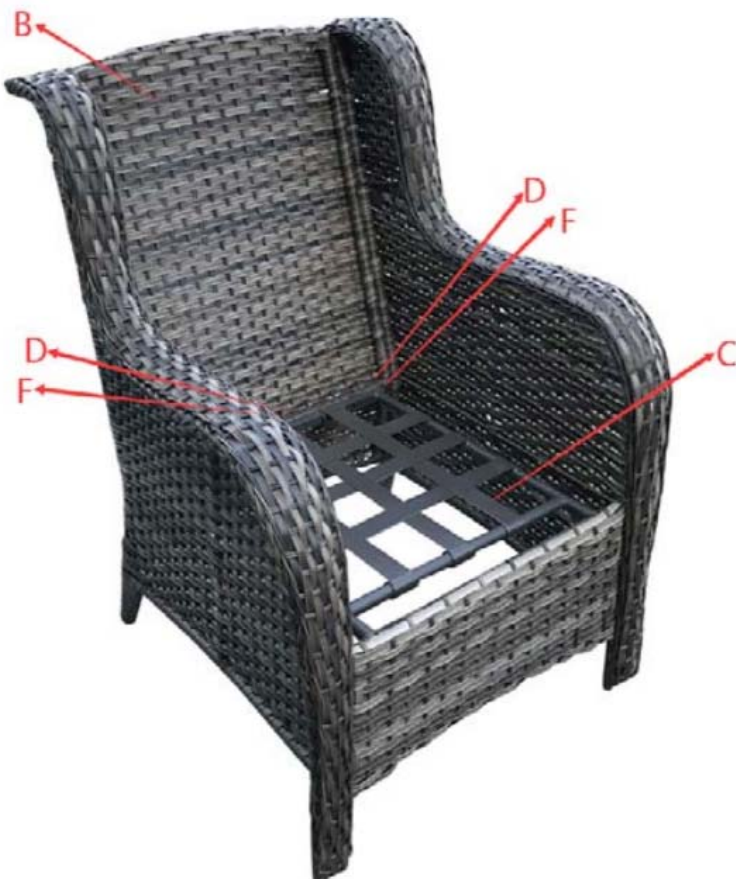

5

Step 5: Put seat cushion (H) and back cushion (I) on the chair. The chair is assembled.

