


User Manual

ASSEMBLY INSTRUCTION

Right corner from inside
62.9L*62.9W*29.5H Inch

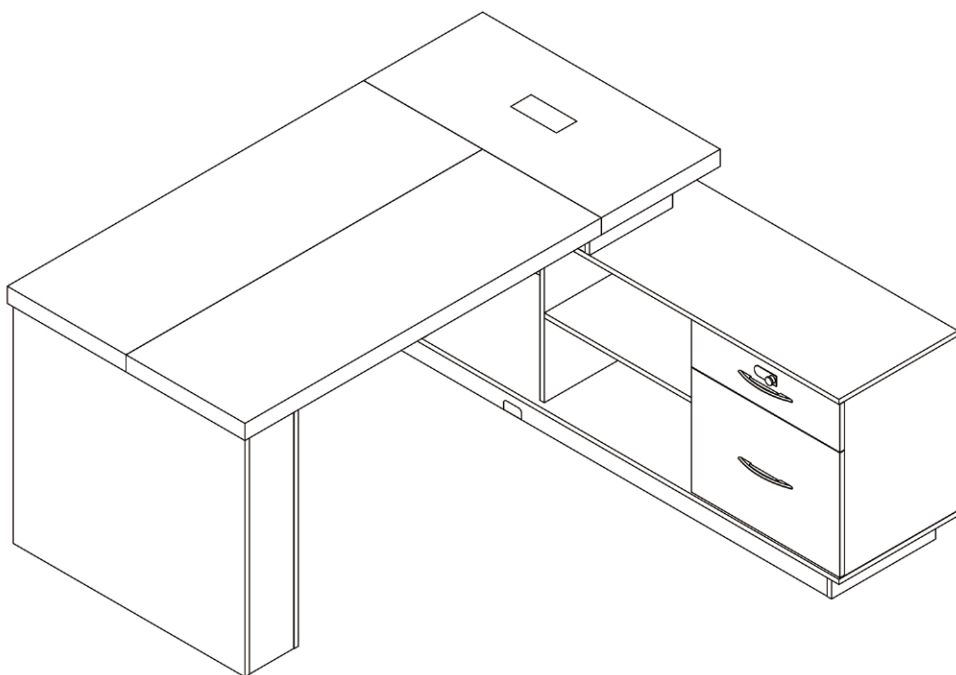

FRIENDLY REMINDER:

THIS DESK FEATURES A REVERSIBLE LEFT/RIGHT DESIGN. BEFORE ASSEMBLY,
PLEASE THOROUGHLY READ THE INSTRUCTIONS TO CONFIRM YOUR DESIRED
LAYOUT,
AND THEN FOLLOW THE CORRESPONDING GUIDANCE.

PLEASE DO NOT RETURN TO STORE



Please do not return this product to the retailer!
We are able to assist you in ANY way!

If you find that you have any trouble with assembly or
missing or damaged parts please contact the seller.

How to set the password of the combination lock?



1. Initial password:
"000"




2. With the lock open,
find the lift lever
from the back




3. Move the lever from
point A to point B



4. Set new password,
for example, "333"

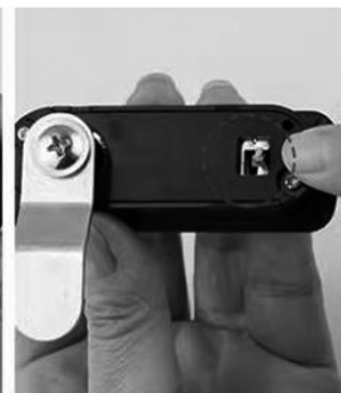


5. Reset the lever to
the initial position

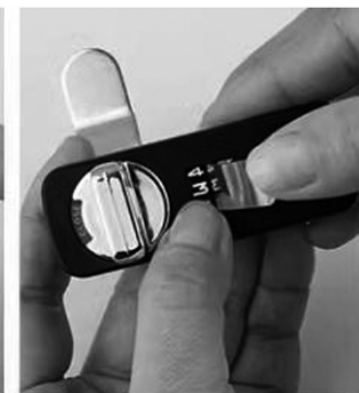

6. Complete Password
Modification

How to separate drawer sliders?

1. The drawer slide I1 & I2 may be connected.
2. Carefully pull out slide part I2 and press the plastic clip/lever to unlock to fully separate the two parts of the runner.

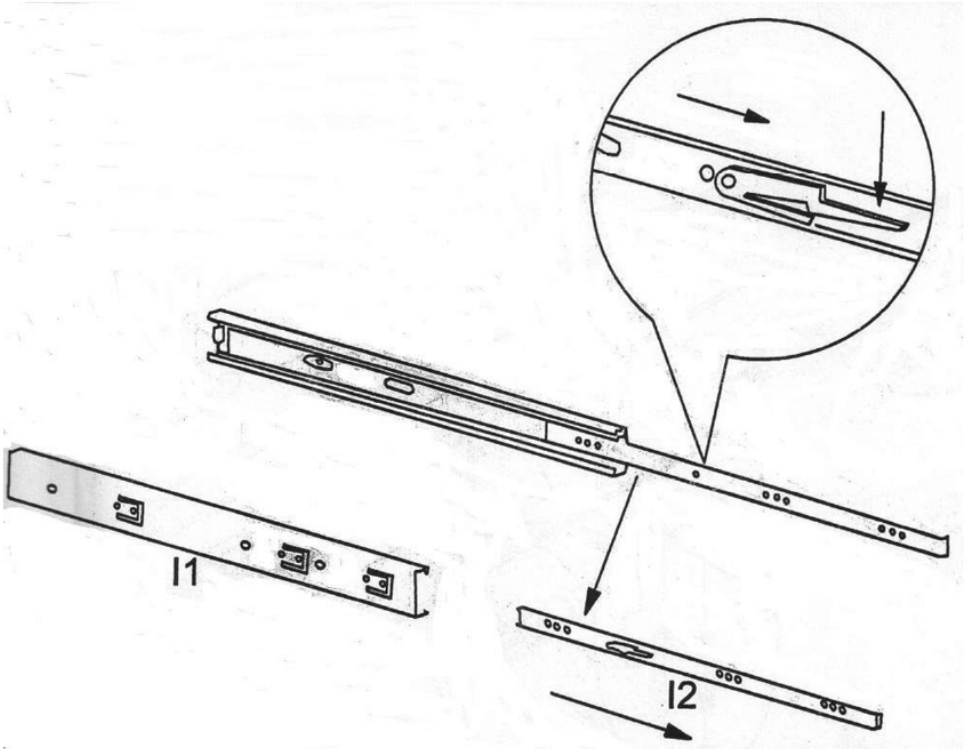

The installation drawing of the light strip, please refer to the light strip usage instruction card for details, thank you!




Parts List


NO.	Drawing	Dimension	QTY
1		1200*800*50mm	*1
2		400*800*50mm	*1
3		700*780*15mm	*1
4		700*780*15mm	*1
5		748*150*15mm	*1
6		685*150*15mm	*2
7		1011*500*15mm	*1
8		690*80*15mm	*1
9		690*80*15mm	*1
10		280*80*15mm	*2
11		1600*400*15mm	*1
12		510*380*15mm	*1
13		510*364*15mm	*1
14		510*364*15mm	*1
15		510*398*15mm	*1
16		1600*400*15mm	*1

NO.	Drawing	Dimension	QTY
17		1568*510*15mm	*1
18		510*180*15mm	*1
19		1470*80*15mm	*1
20		1470*80*15mm	*1
21		350*80*15mm	*2
22		318*80*15mm	*3
23		508*362*15mm	*1
24		500*140*15mm	*1
25		500*364*15mm	*1
26		350*96*15mm	*1
27		350*96*15mm	*1
28		415*96*15mm	*1
29		425*344*4mm	*2
30		1011*40*60mm	*1
31		335*160*15mm	*1
32		335*160*15mm	*1
33		445*280*15mm	*1


Hardware Fitting

NO.	Drawing	QTY
A		*102
B		*102
C	 8*3mm	*2
D		*2
E	 3.5*35mm	*8
F	 3.5*14mm	*40
G		*2
H	 4*18mm	*4
I	 6*50mm	*2

NO.	Drawing	QTY
J	 6*12mm	*4
K	 4mm	*1
L		*1
M		*4
N	 3.5*25mm	*12
O		*2
P		*4
Q	 3.5*20mm	*16
R	 335*34*12mm	*2

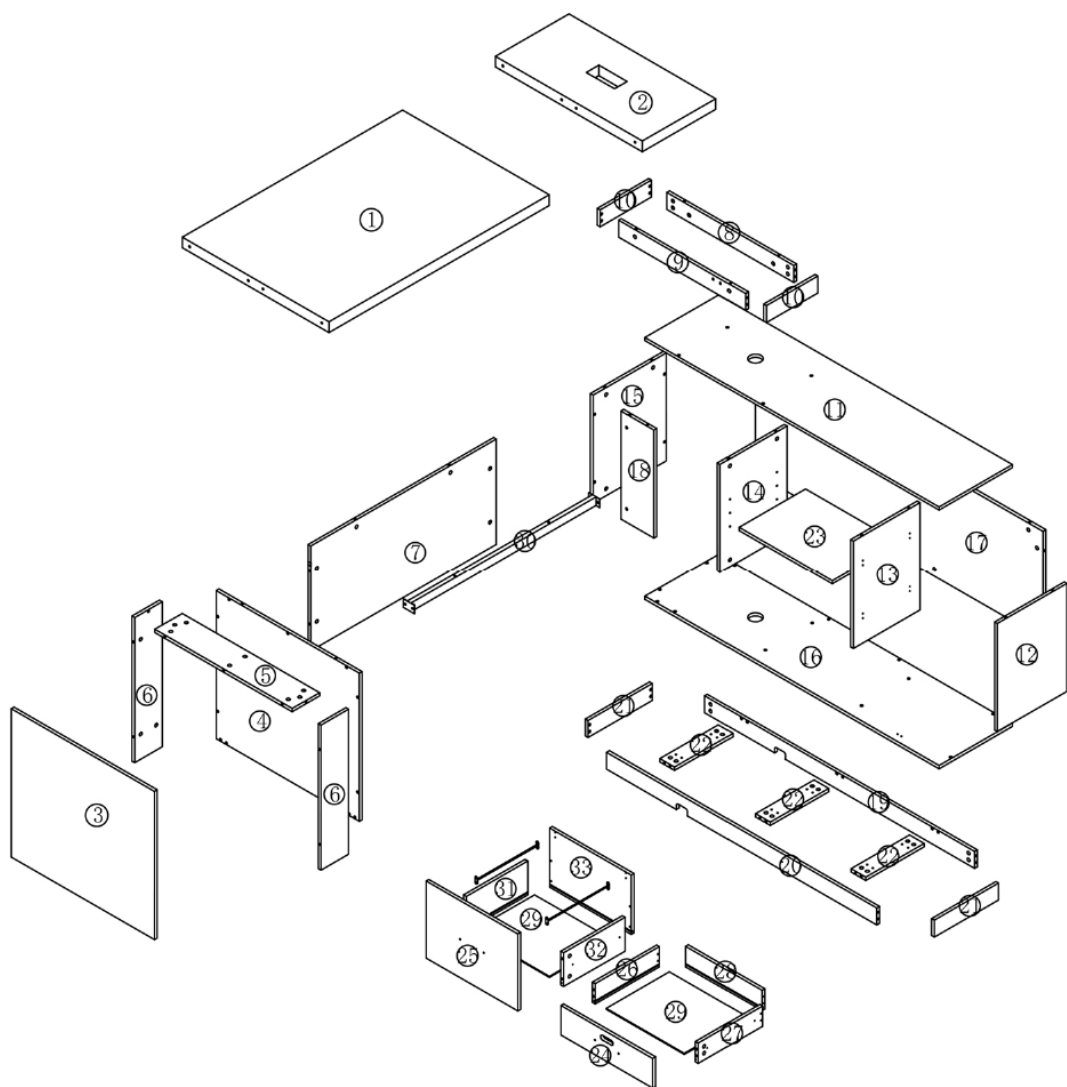


Cam Coupling Using Methods




Step1.

Connect the cam coupling A as directed in the assembly instructions using hand.




Step2.

Screw the cam coupling A as directed in the assembly instructions.




Step3.

Push the cam coupling A into the entry hole.




Step4.

Insert the cam coupling B as shown in the instructions.




Step5.

Turn the cam coupling B clockwise with a screwdriver



Step6.

Put on Beautycam.



Step7.

Finished.

You should feel a click when the camlock is locked in place.
The joint is now secure.