

**For the installation manual
please scan the QR code**



HIDDEN BAR KITCHEN SINK

For the installation manual
please scan the QR code




INSTALLATION PREPARATION

Product Sizes and Cutout Suggestions

●PRODUCT PARAMETERS

Style	Image	Size	External length & width	Inner length & width	External height	Inner height
Cup Wash Sink		5545	55x45cm (21.6inx17.7in)	32x41cm (12.5inx16.1in)	23cm(9.05in)	22cm(8.66in)

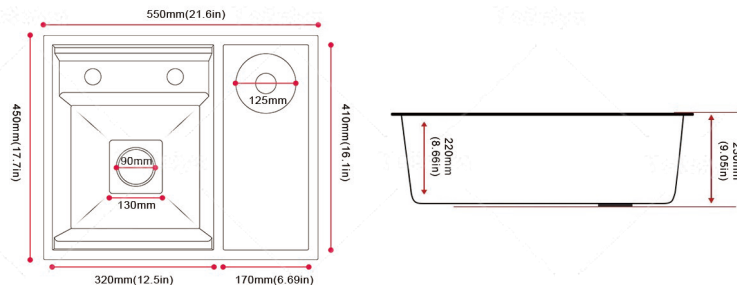


●SUGGESTION FOR DIMENSIONS OF CUTOUT

The size of cutout listed below (Drop-in, 75CMx46CM) is just for your reference, please check all the dimensions on site to make sure the sink perfectly fits for your countertop

PRODUCT PARAMETERS

External Size (Length x Width)	Drop In Cutout Dimensions	Undercounter In Cutout Dimensions
55x45cm (21.6inx17.7in)	52x42cm (20.4inx16.5in)	51x41cm (20inx16.1in)



DESCRIPTION OF ACCESSORIES



① Stainless Steel Sink

② Sink Covers

③ Seven-Character Lift-and-Pull Faucet

④ Drainage System Kit

⑤ Cup Washer Cover

⑥ Plumbing and Angle Valve

⑦ Cup Washer with Hose

DESCRIPTION OF ACCESSORIES

●Step 1: Install the pull-out faucet and water switch



01. Install the washer on the faucet.



02. Place the faucet over the installation hole.



03. First install the washer, then tighten the nut. Next, secure it with a screwdriver.



04. Install the gasket on the faucet handle. Connect the hot and cold water pipes to their respective openings.



05. Place the faucet handle over the mounting hole.



06. Install the washer first, then tighten the nut. Finally, secure it with screws.



07. Locate the faucet valve and hold down the mixing valve button, then connect the black pull-out hose to the faucet.



09. Unscrew the gravity ball screw and install the gravity ball at the 1/3 position on the black pull-out tube.

●Step 2: Install the cup washer



01. Take out the screw gask



02. Insert the cup washer into the sink



03. Connect the cup washer with the hose

Tips: When connecting the hose, you can use the yellow plastic to help tighten screw. But you need an other hand to hold the out and don't tighten it too much.

●Step 3: Install The Drainage System Kit



01. Use the provided tool to disassemble the strainer kit

02. Fix the bottom part

03. Use the tool to fasten the up & bottom strainer part and put the filler in



●Step 4: Install the Upper Drain and Drainage Kit



Install the washer onto the overflow cover and unscrew the nut. Align it with the outer edge of the sink's overflow drain. Tighten the nut from e inside to secure it. Connect the overflow hose, attaching the other end to the drain tee.

●Step 5: Connect your kitchen sink to water supply



01. Connect the water inlet hoses to the angle valves. Red angle valves is for hot water and the other is for cold water.

02. Connect the hose of cup washer to cold water angle valve (the blue one)



Cup Wash Sink installation finish!!!