

ASSEMBLY AND INSTALLATION INSTRUCTIONS




WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

Installation Steps

For Pendant:

1. Attach the nipple-1 to the mounting strap, and then secure with a washer and a hex nut.
2. Attach the mounting strap to the ceiling box by using two mounting screws.
3. Place one end of the arm-1 onto the arm-2, make the hole on the arm-1 to the hole on the arm-2, and then secure with the set screw.
4. Attach the other end of the arm-1 to the rod, and then secure with the set screw.
5. Do the same way for other arms-1.
6. Secure the loop to the nipple-2 of the fixture.
7. Choose a certain length of the chain you need, and then weave the fixture wire and the grounding wire through the chain. Then connect one end of the chain with the loop by using the loop lock.
8. Secure the top loop to the nipple-1 tightly.
9. Thread the fixture wire and grounding wire through the collar, top loop, canopy, nipple-1 and mounting strap in order.
10. connect the other end of the chain with the top loop by using the loop lock.
11. Make wire connections with wire nuts:
 - The smooth wire (marked) from fixture to the black wire from power source.
 - The ridged wire (unmarked) from fixture to the white wire from power source.
 - Attach the grounding wire and house grounding wire to the mounting strap with a green grounding screw. Carefully tuck wires back into the ceiling box.
12. Attach the canopy to the mounting strap by inserting the top loop, and then secure with the collar.
13. Attach the glass shades to the glass holders, and then secure with socket rings.
- Note:**The glass shades should be all in horizontal line.
14. Install bulbs. **(Please do not exceed the maximum capacity which is recommended on the package.)**
15. Turn on the power at fuse or circuit box.

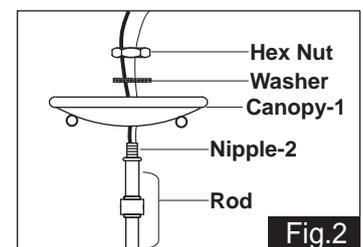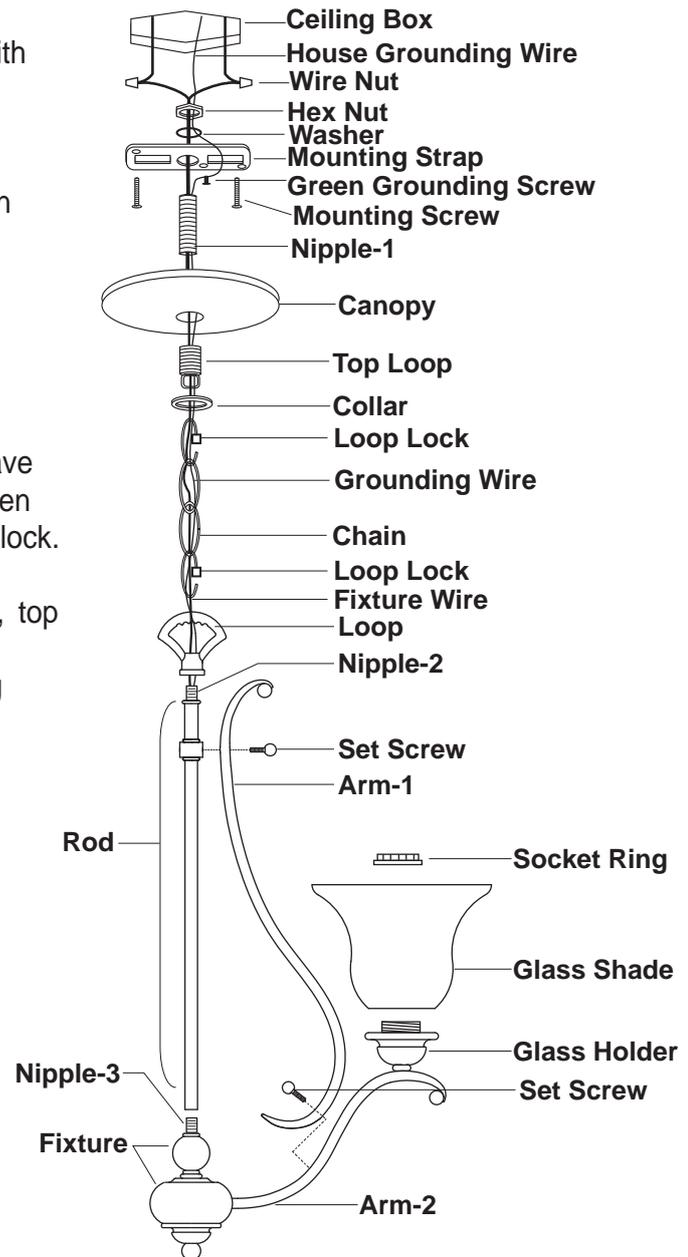

For Semi-Flush:(See Fig.1)

1. Remove the loop from the wires.(See Fig.1)
2. Attach the canopy-1 onto the rod, and then secure with a washer and a hex nut.(See Fig.2)

3. Attach two screws to the mounting strap, and secure with two lock nuts. **(You can adjust the length of the screw if necessary.)**
4. Attach the mounting strap to the ceiling box by using two mounting screws.
5. Follow steps 3~5 as For Pendant.
6. Cut the redundant wires if necessary, and make wire connections with wire nuts:
 - Connect the smooth wire (marked) from fixture to the black wire from power source.
 - Connect the ridged wire (unmarked) from fixture to the white wire from power source.
 - Attach the grounding wire and house grounding wire to the mounting strap with a green grounding screw.
 Carefully tuck wires back into the outlet box.
7. Unscrew two bolt nuts from the canopy, attach the canopy to the mounting strap, and then secure with two bolt nuts.
8. Follow steps 3~5 as For Pendant.

