


Assembly Instructions

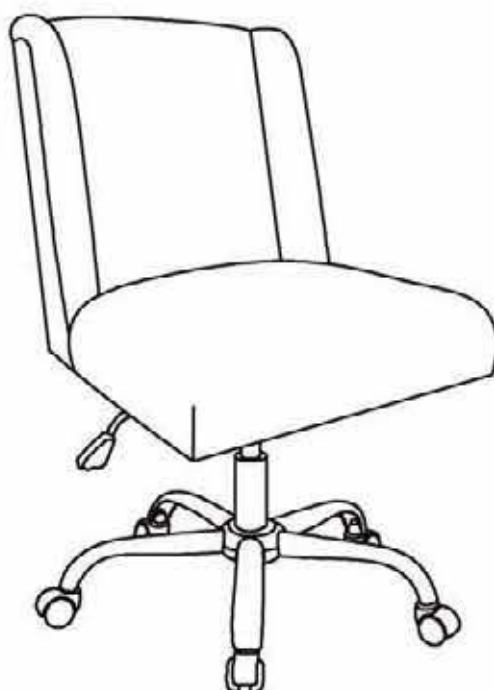

ASSEMBLY RATING

The Assembly Rating is a 5-point system that shows the degree of effort needed in assembling a specific product (with 1 being easy and 5 being difficult). For some products, two persons are recommended.

Tools Required For Assembly:

Allen Wrench



(Included)


EASY DIFFICULT

The assembly rating scale consists of five circles. The first two circles are solid black, and the last three are hollow with a hexagonal shape inside.

ASSEMBLY & CARE ADVICE

FOR YOUR FURNITURE TO LAST, CORRECT ASSEMBLY AND PROPER MAINTENANCE ARE NECESSARY. PLEASE FOLLOW THE INFORMATION PROVIDED BELOW TO FULLY ENJOY YOUR FURNITURE.

BASIC ASSEMBLY TECHNIQUES

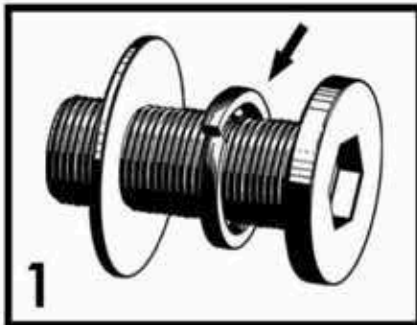


1 When lock or spring washer is used in an assembly, please make sure the lock or spring washer is placed between the larger flat washer and the head of the screw or bolt.




2 Position each part correctly and insert screws or bolts into their respective holes by hand tighten or using the proper hand tool. Only tighten when step is completed or when instructed to do so.




3 Use cardboard or carpet area when assembling furniture to prevent scratches. Make sure the furniture rests on a flat and level surface with each leg evenly touching the floor.

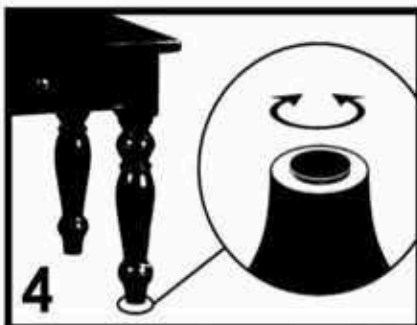

4 Some furniture comes with height adjustment knobs underneath each leg. To lower or to raise each leg, you need to turn clockwise or counterclockwise, respectively.

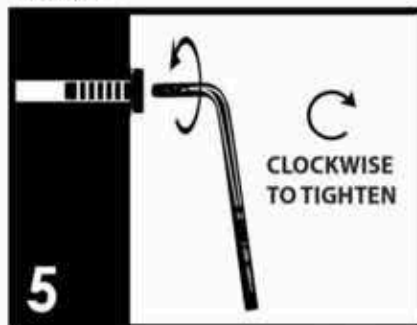

5 Make sure all parts are properly aligned, then use the appropriate hand tool to completely tighten the bolts or screws. Do not use power tools and do not overtighten.

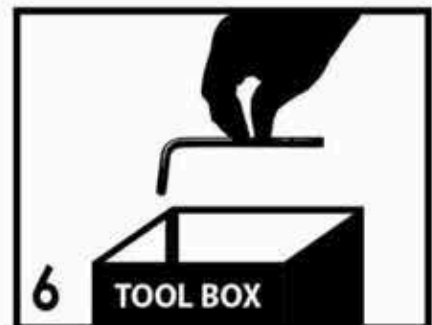

6 Save the instructions and store the Allen wrench or any supplied tool for later maintenance. After two weeks, check and tighten any loose hardware and repeat again every six months thereafter.

IT IS THE USER'S RESPONSIBILITY TO MAINTAIN THE FURNITURE. THE HARDWARE MAY LOOSEN OVER TIME AND MAY CAUSE THE FURNITURE TO BE WOBBLY AND UNABLE TO SUPPORT ITS INTENDED WEIGHT CAPACITY. THIS MAY LEAD TO COLLAPSE AND MAY CAUSE SERIOUS INJURY.



FAILURE TO FOLLOW THE GUIDELINES ABOVE MAY RESULT IN INJURY AND/OR PROPERTY DAMAGE.



Before you begin, please read Page 2 of "Assembly and Care Advice".

And remember, do not tighten until each step is completed or instructed.


Parts List



#1 x 1pc
Seat



#2 x 1pc
Seat plate w/handle



#3 x 1pc
Gas lift cylinder




#4 x 1pc
5-Star Base



#5 x 5pcs
Caster

Hardware List




#A x 4pcs
Bolt M6x35mm



#Bx 4pcs
Flat Washer M6*18*1.2mm




#C x 1pc
Allen Wrench M6

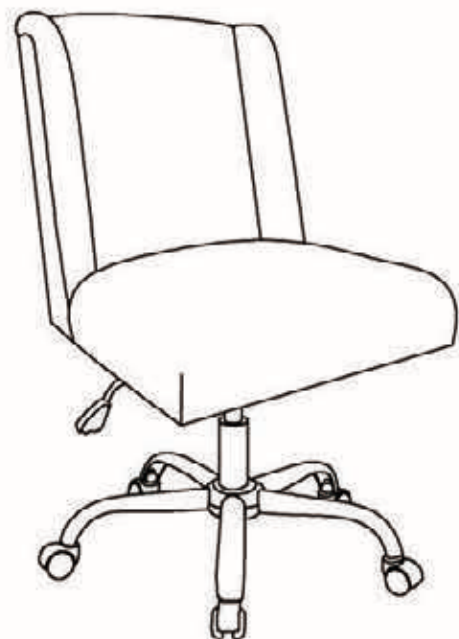




If there is a black plastic cap on gas lift (#3), remove the cap from gas lift (#3). Attach casters (#5) and gas lift (#3) onto 5 star base (#4).

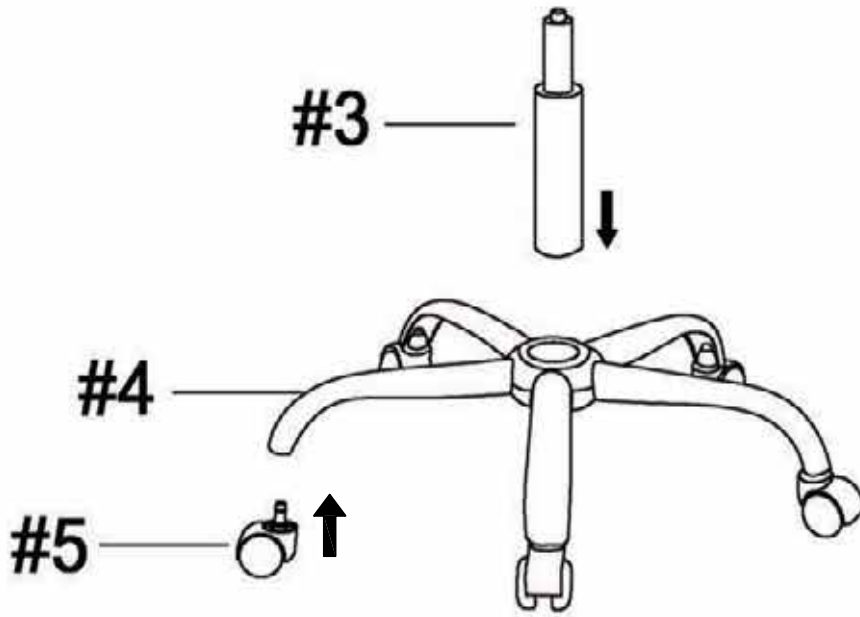



Prepare 4 bolts assembly by inserting flat washer (#B) onto bolts (#A). Align seat plate (#2) to the holes of the seat (#1) as shown in the picture. Secure with bolts (#A).

#AX4pcs
#BX4pcs

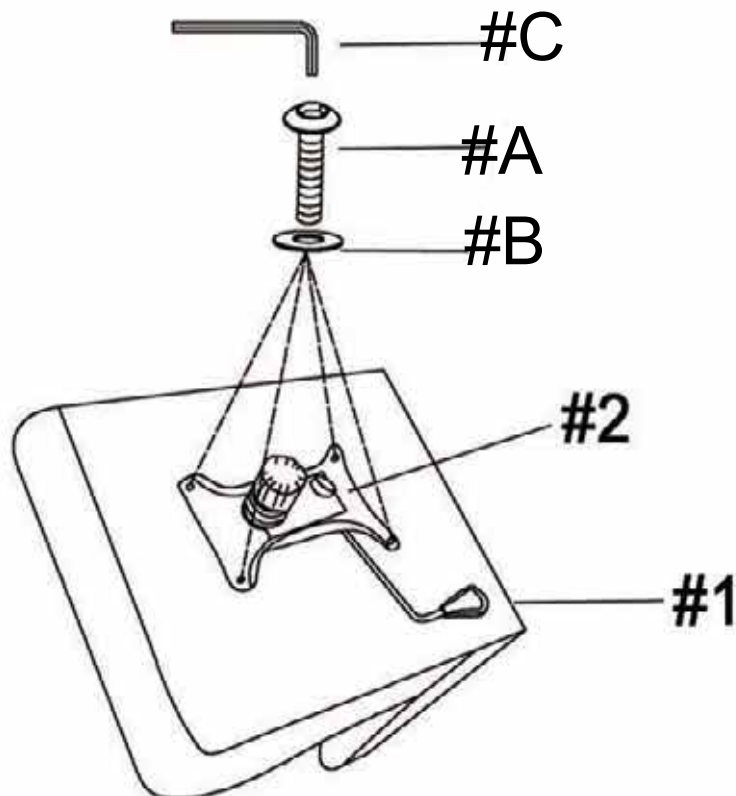



Place the seat plate (#2) onto the gas lift (#3). Make sure it is secured firmly together.

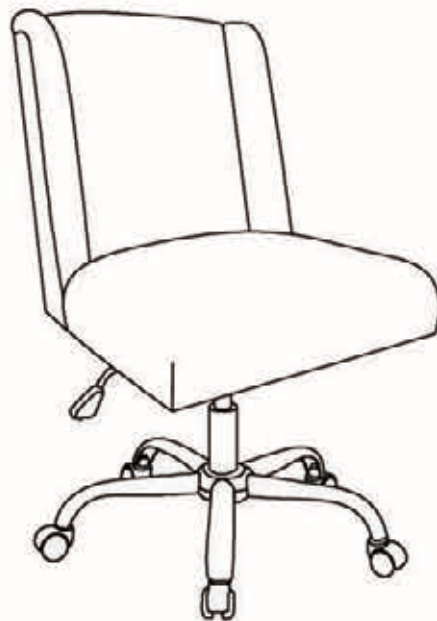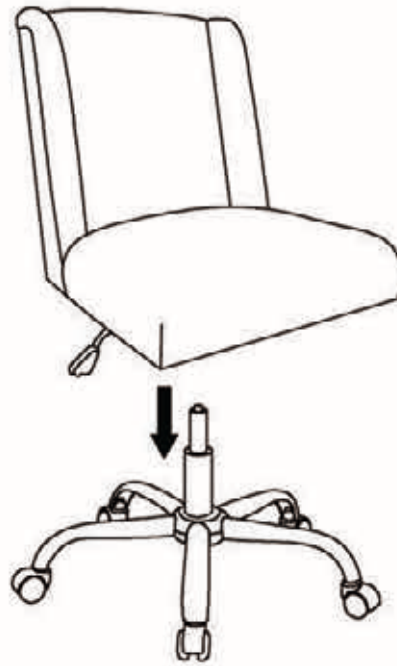

ASSEMBLY IS COMPLETED