


Examine all packaging material for small parts that may have come loose during shipment. Periodic checks are recommended to insure that all components are in proper position, tight and free from damage. Keep this assembly instruction for future reference. Adult assembly is required. T

CODE	QTY	HARDWARE
1	6	Long Allen Bolts 
2	4	Short Head Bolts 
3	8	Large Metal Washers 
4	2	Small Metal Washers 
5	10	Spring Washers 
6	2	Wood Plugs 
7	1	Allen Wrench 





CODE	QTY	COMPONENTS	CODE	QTY	COMPONENTS
A	1	Seat Back 	B	1	Seat Base 
			C	2	Arms 

## WARNING

- Do not let any sharp objects touch or rub the surface of the product.
- When assembling, do not let children play around the working area.
- Please confirm all parts are correct before starting the assembly process.
- Do not tighten all bolts and screws completely until the entire unit has been assembled and set up.
- Be careful if using power tools as they can over tighten screws and strip threads.

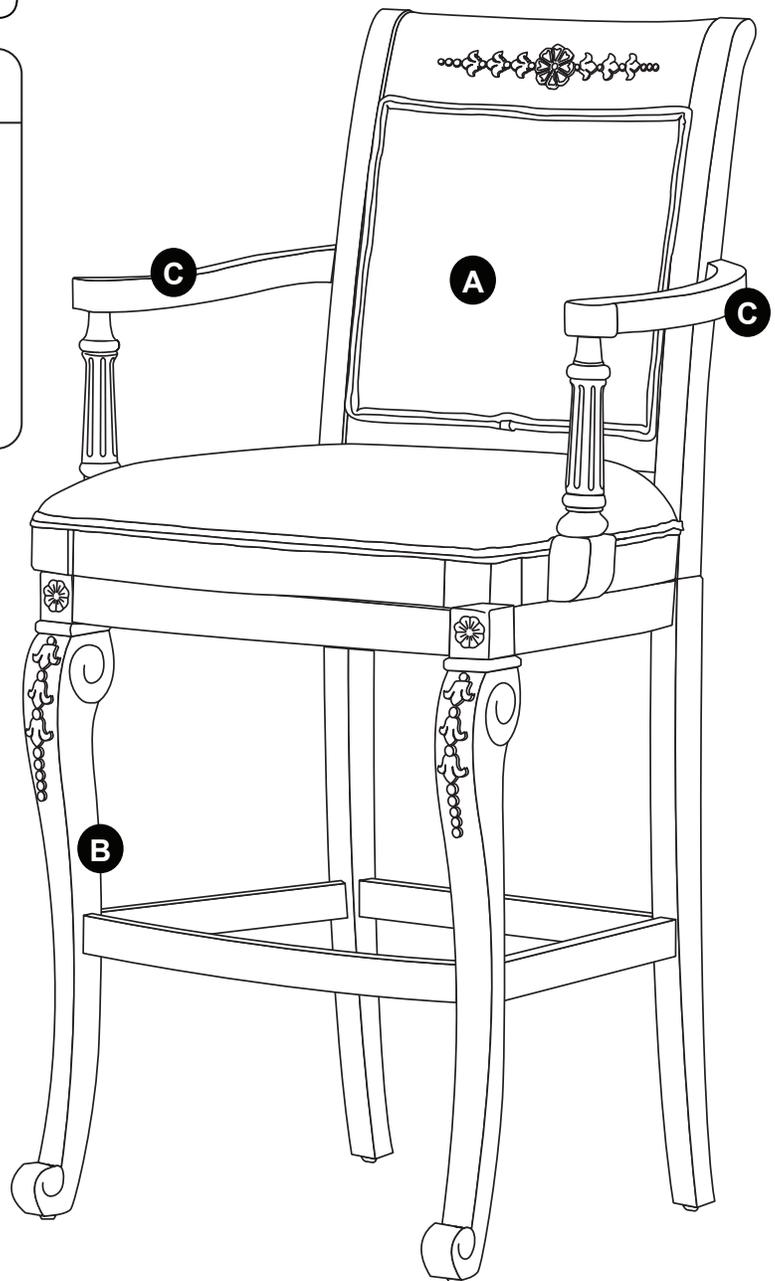

**CARE & MAINTENANCE:** The touch of a soft cloth is all the maintenance the finish will ever need. Please do not use harsh or abrasive cleaners for polishing, as they may cause damage to the finish. Periodic checks are recommended to make sure that all hardware is securely tightened.

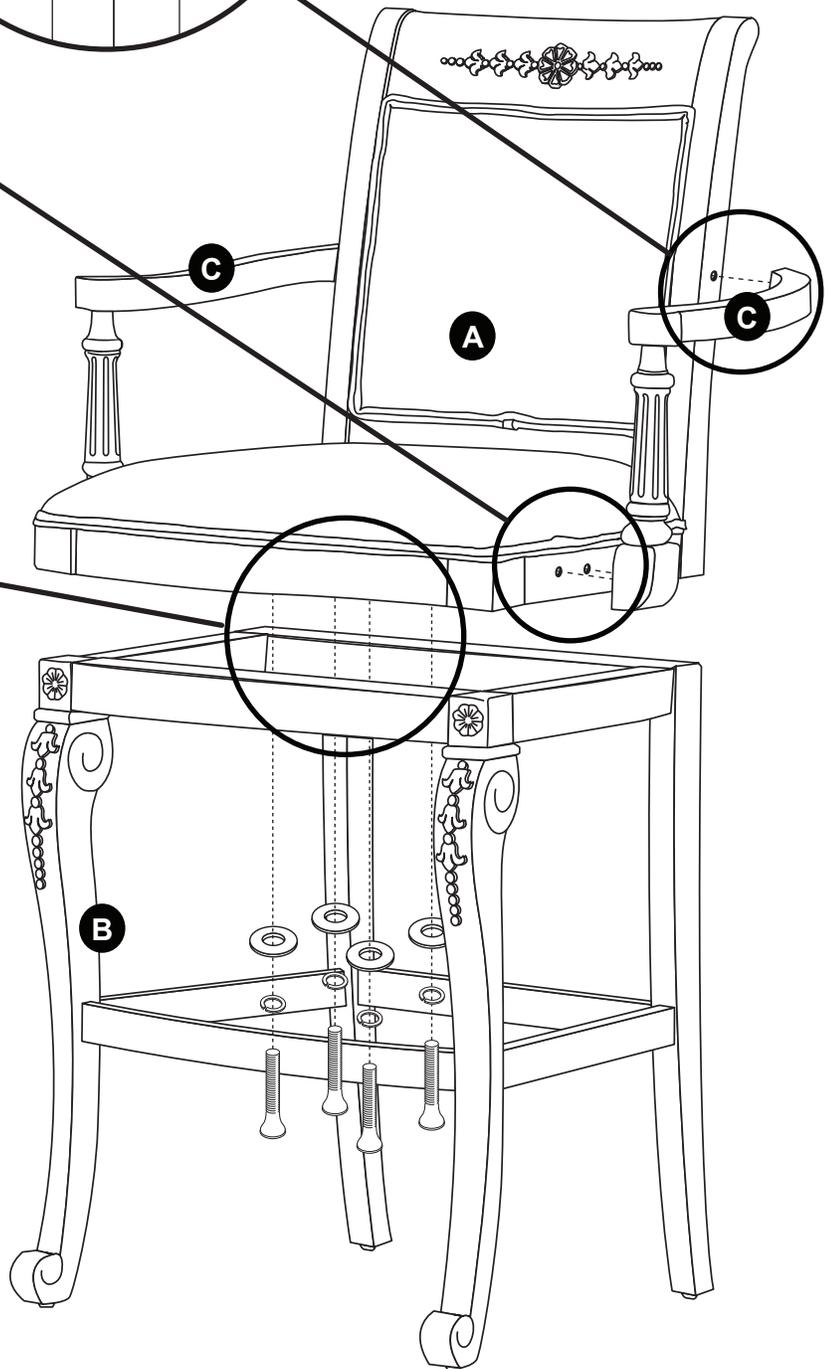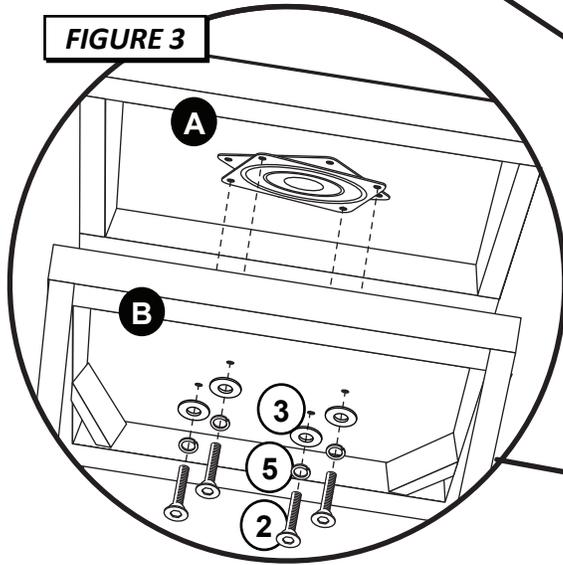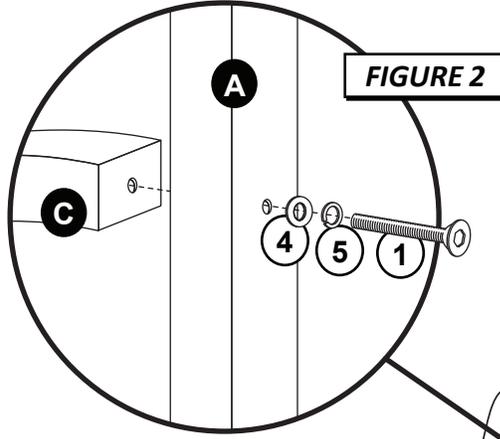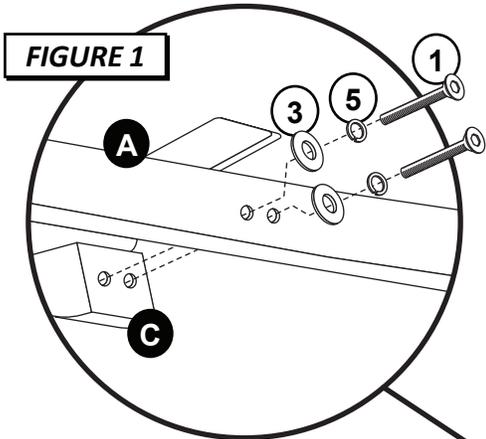

**STEP 1 - Figure 1**

Begin assembly by attaching both Arms (C) to Seat Back (A) using 2 Long Allen Bolts (1), 2 Spring Washers (5) and 2 Large Metal Washers (3) at the bottom.

**STEP 2 - Figure 2**

Next, use 1 Long Allen Bolt (1), 1 Spring Washer (5) and 1 Small Metal Washer (4) at the top on the back side, per each arm. Tighten all bolts using Allen Wrench (7) provided.

**STEP 3 - Figure 3**

Attach the Seat Base (B) to Seat Back (A) using 4 Short Head Bolts (2), 4 Spring Washers (5) and 4 Large Metal Washers (3) to hold in place. Tighten all bolts using Allen Wrench (7) provided. The assembly is now complete.