

Assembly Instruction

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Bulb Recommended: (1) Medium Base 100W Maximum

Estimated Assembly Time: 20-30 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.



Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.


Package Contents

Part	Description	Quantity
A	Mounting Screw	3 pcs.
B	Fixture Body	1 pc.

A






B

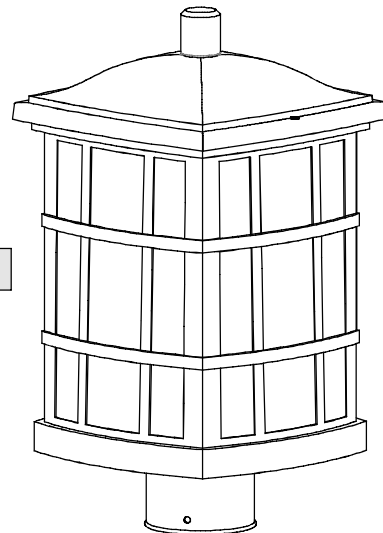

Thank you for purchasing a product.
Need assistance with parts or assembly? Call customer service or visit us

FINISH: PALLADIAN BRONZE

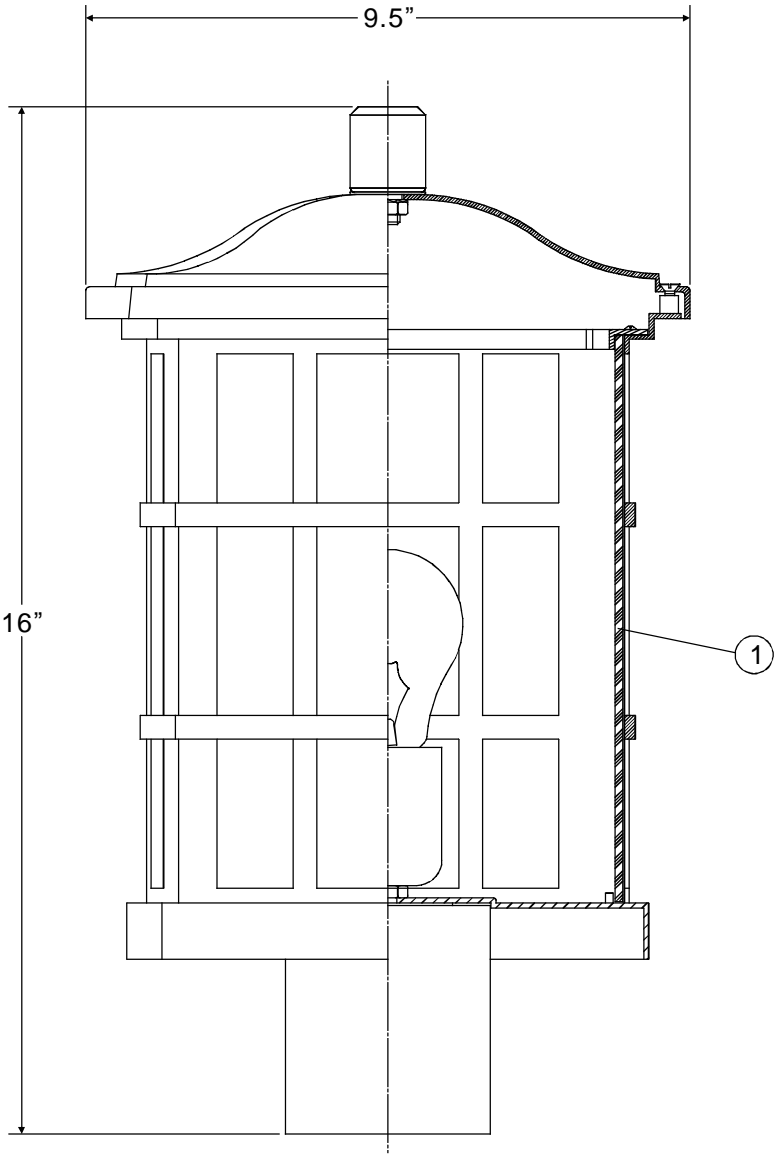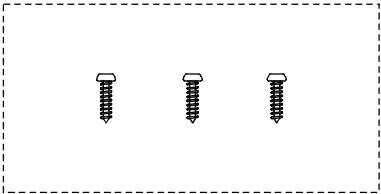

(1)100W Medium
Base Bulb
(Not Supplied)

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/2"

NO.	REPLACEMENT PART DESCRIPTION	REQ.
1	PANEL GLASS BENT WATER	4

Assembly Instruction

STEP 1 - Remove Fixture Hood from the Cage

- A. Remove the Fixture Hood from the Cage by unscrewing the Lock Screws.

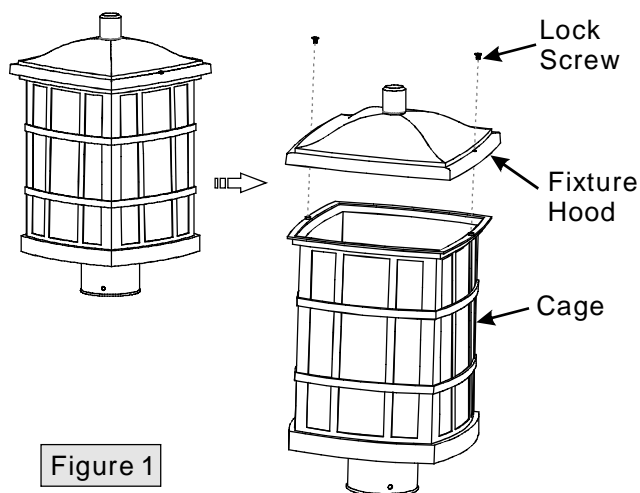


Figure 1

STEP 2 - Install Bulb

- A. This fixture uses standard bulb with a medium screw base. Maximum 100 watts.
B. Insert bulb and screw snugly into place.

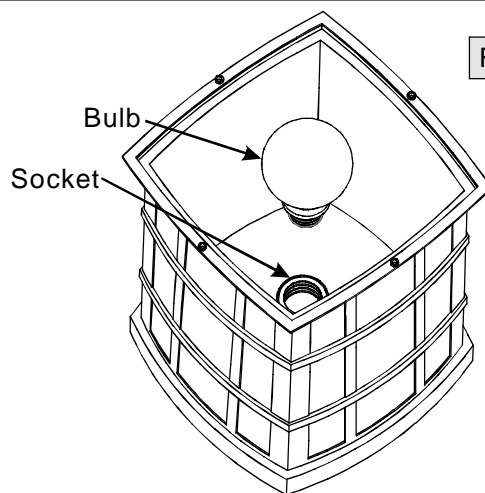


Figure 2

STEP 3 - Install Fixture Hood

- A. Place the Fixture Hood back onto the Cage and secure with the Lock Screws. Hand tighten until snug.

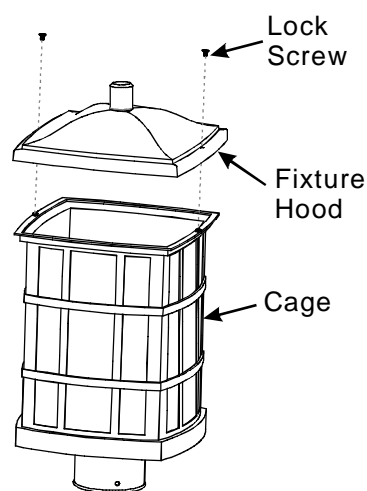


Figure 3

Thank you for purchasing a product.
Need assistance with parts or assembly? Call customer service or visit us

Assembly Instruction

STEP 4 - Drill Pilot Holes on Post

- A. Carefully fit the Post Fitter over the end of the Post (not supplied), making sure the Post Fitter is fully seated.
- B. Mark the drill point for the (3) Mounting Screws, using (3) Mounting Holes as reference. After marking hole locations, remove fixture from post and drill 1/16" pilot holes for screws.

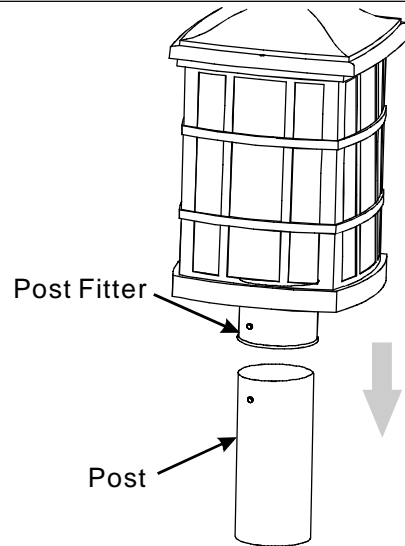


Figure 4

STEP 5 - Make Wire Connections

- A. Use standard wire connectors to make all wire connections. (Connectors are not included with fixture.) Strip and prepare wire ends according to instructions supplied with connectors.
- B. Connect White Supply Wire from the Post to White Wire from fixture.
- C. Connect Black (or Red) Supply Wire from the Post to Black Wire from fixture.
- D. Connect Ground Wire from the Post to Ground Wire from fixture.
- E. Twist connectors until wires are tightly joined together.
- F. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Post.

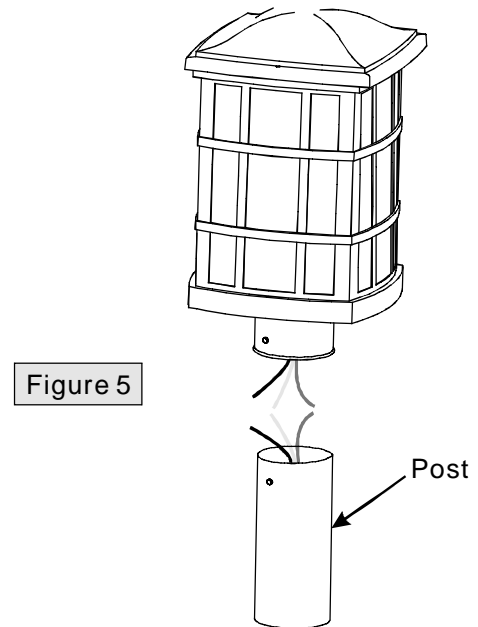


Figure 5

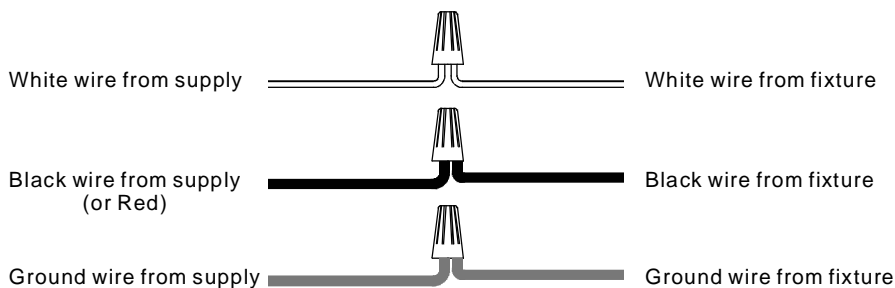


Figure 6

Thank you for purchasing a product.
Need assistance with parts or assembly? Call customer service or visit us

Assembly Instruction

STEP 6 - Attach Fixture Body to Post

- A. Coat the top 1" of the Post with Clear Silicone Caulk (not supplied) and position the Post Fitter onto the Post. Be sure to seat it completely, aligning the holes in the Fitter with the 1/16" Pilot Holes drilled into the Post.
- B. Secure the Fixture to Post with (3) Mounting Screws.

Your fixture is now assembled and ready to use.
Enjoy!

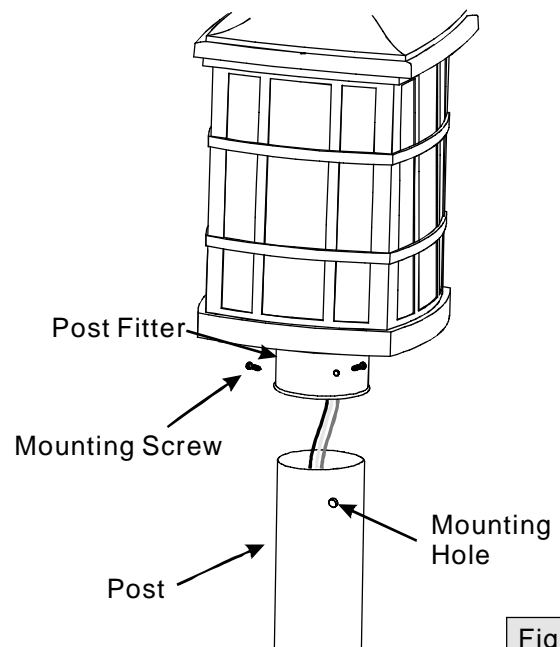


Figure 7

REPLACE GLASS PANELS

STEP 7 - Remove Fixture Hood from the Cage

- A. Remove the Fixture Hood from the Cage by unscrewing the Lock Screws.

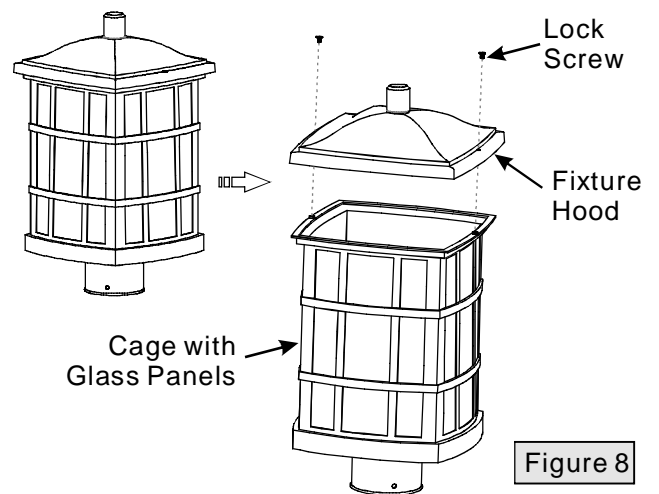



Figure 8

Thank you for purchasing a product.
Need assistance with parts or assembly? Call customer service or visit us

Assembly Instruction

STEP 8 - Replace Glass Panels

- A. Unscrew the Lock Screws on the top of the Cage. Remove the Glass Holder from the Cage.
- B. Remove the broken Glass Panel inside of the Cage and insert the replacement Glass Panel.
- C. Place the Glass Holder back onto the top of the Cage and secure with Lock Screws. Hand tighten until snug.

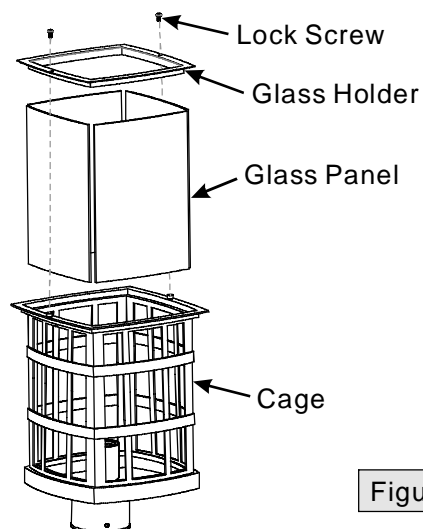

STEP 9 - Install the Cage

- A. Attach the Fixture Hood onto the top of the Cage and secure with Lock Screws. Hand tighten until snug.

