


# Assembly Instruction

**CAUTION:** Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.



## Care and Cleaning














To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent)to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:30 minutes

## Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Wire Nut		3X	H	Fixture Loop		1X
B	Mounting Plate		1X	I	Chain		1X
C	Mounting Screw		2X	J	Rod		1X
D	Canopy		1X	K	Lamp Boby		1X
E	Hanging Loop		1X	L	Finial		1X
F	Canopy Nut		1X	M	Bulb		2X
G	Closable link/cap		2X				

# Installation

## Step 1


Unpack all parts from cartons carefully.

Insert the fixture wires through the Rod(J).

Assemble the Rod(J) into the nipple of the Lamp Body(K) as Fig.1

Attach the top spider of the Lamp Body(K) onto the Rod(J) as Fig.2,turn the Fixture Loop(H) clockwise till tight.

Attach the Finial(L) onto the bottom nipple of the Lamp Body(K) and rotate till tight.

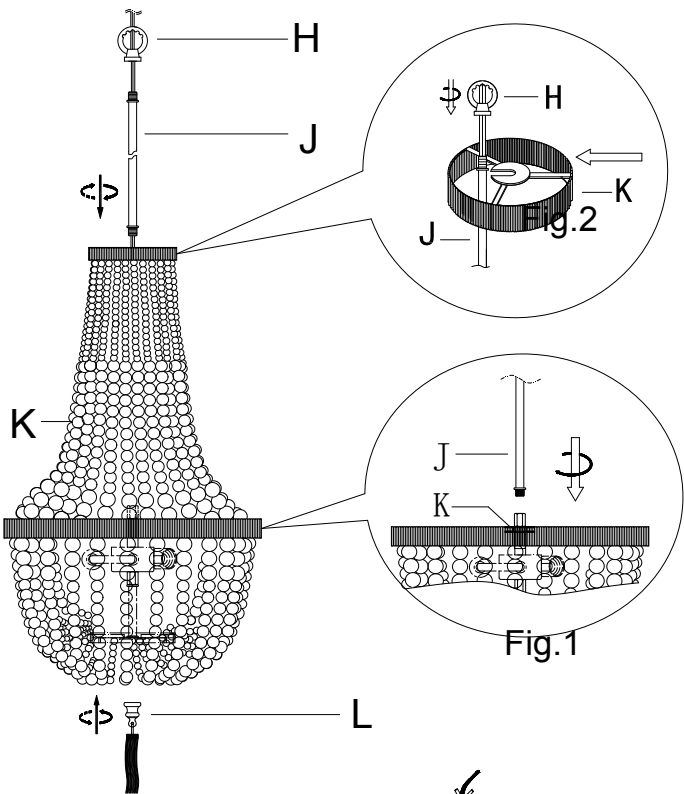


## Step 2

Screw the Chain(I) to the Hanging Loop(E) and Fixture Loop(H) with Closable link/cap (G) .


Weave the 2 wire power cord and bare ground wire through every other loop to the top of chain(I), Hanging Loop(E),Canopy(D) and Mounting Plate(B).

Slide the Canopy Nut(F) then Canopy(D) to the end of the Chain(I).

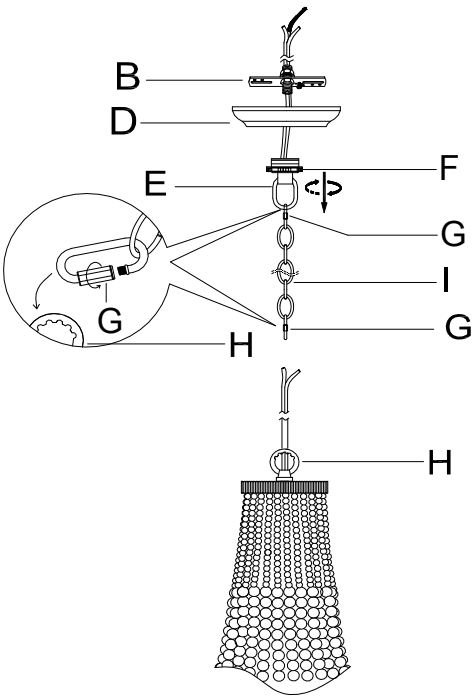

## Step 3 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



\*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)




## Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

## Step 4

Attach the Mounting Plate (B) onto the junction box by inserting two Mounting Screws (C) and turning clockwise till tight.


Slide the Canopy (D) upward along the chain(I) till the ceiling surface. Fix the Canopy(D) by rotating the Canopy Nut(F)clockwise to engage it with the threaded portion of the Hanging Loop (E) until secure. Do not over tighten this nut.

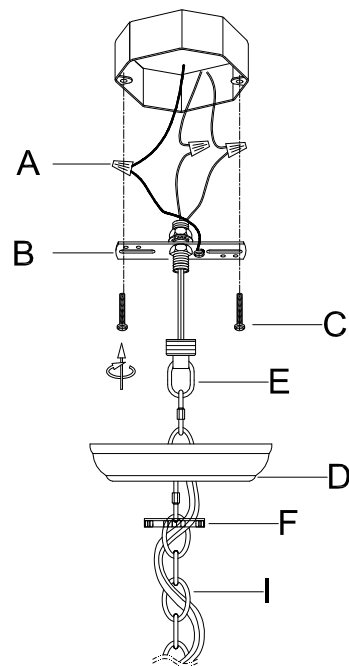

## Step 5

Insert the bulb(M) into the socket.  
DO NOT EXCEED THE SPECIFIED WATTAGE.

**PLEASE USE TYPE "B" BULB MAX 40-WATT  
OR CFL BULB MAX 13-WATT OR LED MAX 9-WATT  
THERE ARE 2\*4W LED BULBS IN THE BOX.**

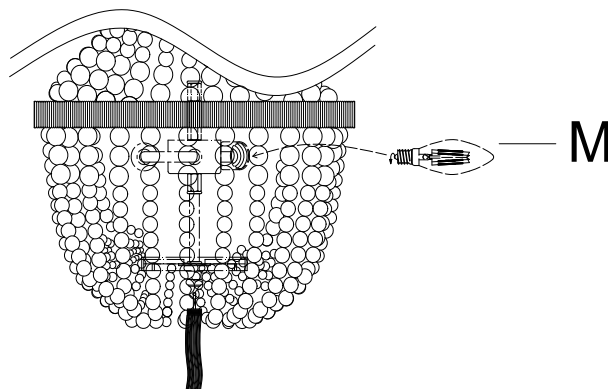

## Step 6

Consult a qualified electrician to ensure correct branch circuit conductor

ENJOY YOUR LAMP